



# COMMUNITY DEVELOPMENT DEPARTMENT

45175 Ten Mile Road  
Novi, MI 48375  
(248) 347-0415 Phone  
(248) 735-5600 Facsimile  
[www.cityofnovi.org](http://www.cityofnovi.org)

## ZONING BOARD OF APPEALS STAFF REPORT

FOR: City of Novi Zoning Board of Appeals

ZONING BOARD APPEALS DATE: October 13, 2020

REGARDING: 22652 Montebello Court, Parcel # 50-22-27-453-021 (PZ20-0041)

BY: Larry Butler, Deputy Director Community Development

### I. GENERAL INFORMATION:

**Applicant**

Compo Builders Inc

**Variance Type**

Dimensional Variance

**Property Characteristics**

Zoning District:	Single Family Residential
Location:	West of Novi Road and North of Nine Mile Road
Parcel #:	50-22-27-453-021

**Request**

The applicant is requesting variance from the Novi Zoning Ordinance Section 4.19.1.E.i for a proposed 1,002 square foot garage (850 square feet permitted by code, variance of 152 square feet). This variance would accommodate the building the garage for a proposed new residential home. This property is zoned Single Family Residential (R-3).

### II. STAFF COMMENTS:

### III. RECOMMENDATION:

The Zoning Board of Appeals may take one of the following actions:

1. I move that we **grant** the variance in Case No. **PZ20-0041**, sought by \_\_\_\_\_, for \_\_\_\_\_ because Petitioner has shown practical difficulty requiring \_\_\_\_\_.
- (a) Without the variance Petitioner will be unreasonably prevented or limited with respect to use of the property because \_\_\_\_\_.
- (b) The property is unique because \_\_\_\_\_.
- (c) Petitioner did not create the condition because \_\_\_\_\_.

\_\_\_\_\_.

(d) The relief granted will not unreasonably interfere with adjacent or surrounding properties because\_\_\_\_\_.

\_\_\_\_\_.

(e) The relief if consistent with the spirit and intent of the ordinance because

\_\_\_\_\_.

\_\_\_\_\_.

(f) The variance granted is subject to:

1. \_\_\_\_\_.

2. \_\_\_\_\_.

3. \_\_\_\_\_.

4. \_\_\_\_\_.

2. I move that we **deny** the variance in Case No. **PZ20-0041**, sought by \_\_\_\_\_, for \_\_\_\_\_ because Petitioner has not shown practical difficulty requiring \_\_\_\_\_.

(a) The circumstances and features of the property including \_\_\_\_\_ are not unique because they exist generally throughout the City.

(b) The circumstances and features of the property relating to the variance request are self-created because \_\_\_\_\_.

(c) The failure to grant relief will result in mere inconvenience or inability to attain higher economic or financial return based on Petitioners statements that \_\_\_\_\_.

(d) The variance would result in interference with the adjacent and surrounding properties by \_\_\_\_\_.

(e) Granting the variance would be inconsistent with the spirit and intent of the ordinance to \_\_\_\_\_.

Should you have any further questions with regards to the matter please feel free to contact me at (248) 347-0417.

Larry Butler  
Deputy Director Community Development  
City of Novi



45175 Ten Mile Road  
 Novi, MI 48375  
 (248) 347-0415 Phone  
 (248) 735-5600 Facsimile  
[www.cityofnovi.org](http://www.cityofnovi.org)

## ZONING BOARD OF APPEALS APPLICATION

**APPLICATION MUST BE FILLED OUT COMPLETELY**

<b>I. PROPERTY INFORMATION (Address of subject ZBA Case)</b>				Application Fee: _____	
PROJECT NAME / SUBDIVISION				Meeting Date: _____	
ADDRESS		LOT/SIUTE/SPACE #		ZBA Case #: PZ _____	
SIDWELL # 50-22-_____-_____-_____		May be obtain from Assessing Department (248) 347-0485			
CROSS ROADS OF PROPERTY					
IS THE PROPERTY WITHIN A HOMEOWNER'S ASSOCIATION JURISDICTION?			REQUEST IS FOR:		
<input type="checkbox"/> YES <input type="checkbox"/> NO			<input type="checkbox"/> RESIDENTIAL <input type="checkbox"/> COMMERCIAL <input type="checkbox"/> VACANT PROPERTY <input type="checkbox"/> SIGNAGE		
DOES YOUR APPEAL RESULT FROM A NOTICE OF VIOLATION OR CITATION ISSUED?				<input type="checkbox"/> YES <input type="checkbox"/> NO	
<b>II. APPLICANT INFORMATION</b>					
<b>A. APPLICANT</b>		EMAIL ADDRESS		CELL PHONE NO.	
NAME				TELEPHONE NO.	
ORGANIZATION/COMPANY				FAX NO.	
ADDRESS		CITY		STATE	ZIP CODE
<b>B. PROPERTY OWNER</b> <input type="checkbox"/> CHECK HERE IF APPLICANT IS ALSO THE PROPERTY OWNER					
Identify the person or organization that owns the subject property:		EMAIL ADDRESS		CELL PHONE NO.	
NAME				TELEPHONE NO.	
ORGANIZATION/COMPANY				FAX NO.	
ADDRESS		CITY		STATE	ZIP CODE
<b>III. ZONING INFORMATION</b>					
<b>A. ZONING DISTRICT</b>					
<input type="checkbox"/> R-A <input type="checkbox"/> R-1 <input type="checkbox"/> R-2 <input type="checkbox"/> R-3 <input type="checkbox"/> R-4 <input type="checkbox"/> RM-1 <input type="checkbox"/> RM-2 <input type="checkbox"/> MH <input type="checkbox"/> I-1 <input type="checkbox"/> I-2 <input type="checkbox"/> RC <input type="checkbox"/> TC <input type="checkbox"/> TC-1 <input type="checkbox"/> OTHER _____					
<b>B. VARIANCE REQUESTED</b>					
INDICATE ORDINANCE SECTION (S) AND VARIANCE REQUESTED:					
1. Section _____ Variance requested _____					
2. Section _____ Variance requested _____					
3. Section _____ Variance requested _____					
4. Section _____ Variance requested _____					
<b>IV. FEES AND DRAWINGS</b>					
<b>A. FEES</b>					
<input type="checkbox"/> Single Family Residential (Existing) \$200 <input type="checkbox"/> (With Violation) \$250 <input type="checkbox"/> Single Family Residential (New) \$250					
<input type="checkbox"/> Multiple/Commercial/Industrial \$300 <input type="checkbox"/> (With Violation) \$400 <input type="checkbox"/> Signs \$300 <input type="checkbox"/> (With Violation) \$400					
<input type="checkbox"/> House Moves \$300 <input type="checkbox"/> Special Meetings (At discretion of Board) \$600					
<b>B. DRAWINGS    1-COPY &amp; 1 DIGITAL COPY SUBMITTED AS A PDF</b>					
• Dimensioned Drawings and Plans			• Existing & proposed distance to adjacent property lines		
• Site/Plot Plan			• Location of existing & proposed signs, if applicable		
• Existing or proposed buildings or addition on the property			• Floor plans & elevations		
• Number & location of all on-site parking, if applicable			• Any other information relevant to the Variance application		



# ZONING BOARD OF APPEALS APPLICATION

## V. VARIANCE

### A. VARIANCE (S) REQUESTED

DIMENSIONAL     USE     SIGN

There is a five-(5) hold period before work/action can be taken on variance approvals.

### B. SIGN CASES (ONLY)

Your signature on this application indicates that you agree to install a **Mock-Up Sign ten-(10) days** before the schedule ZBA meeting. Failure to install a mock-up sign may result in your case not being heard by the Board, postponed to the next schedule ZBA meeting, or cancelled. A mock-up sign is **NOT** to be actual sign. Upon approval, the mock-up sign must be removed within five-(5) days of the meeting. If the case is denied, the applicant is responsible for all costs involved in the removal of the mock-up or actual sign (if erected under violation) within five-(5) days of the meeting.

### C. ORDINANCE

#### City of Novi Ordinance, Section 3107 – Miscellaneous

No order of the Board permitting the erection of a building shall be valid for a period longer than one-(1) year, unless a building permit for such erection or alteration is obtained within such period and such erection or alteration is started and proceeds to completion in accordance with the terms of such permit.

No order of the Board permitting a use of a building or premises shall be valid for a period longer than one-hundred and eighty-(180) days unless such use is establish within such a period; provided, however, where such use permitted is dependent upon the erection or alteration or a building such order shall continue in force and effect if a building permit for such erection or alteration is obtained within one-(1) year and such erection or alteration is started and proceeds to completion in accordance with the terms of such permit.

### D. APPEAL THE DETERMINATION OF THE BUILDING OFFICIAL

PLEASE TAKE NOTICE:

The undersigned hereby appeals the determination of the Building Official / Inspector or Ordinance made

CONSTRUCT NEW HOME/BUILDING     ADDITION TO EXISTING HOME/BUILDING     SIGNAGE  
 ACCESSORY BUILDING     USE     OTHER \_\_\_\_\_

## VI. APPLICANT & PROPERTY SIGNATURES

### A. APPLICANT

  
Applicant Signature

8/26/2020  
Date

### B. PROPERTY OWNER

**If the applicant is not the owner, the property owner must read and sign below:**

The undersigned affirms and acknowledges that he, she or they are the owner(s) of the property described in this application, and is/are aware of the contents of this application and related enclosures.

  
Property Owner Signature

8/26/2020  
Date

## VII. FOR OFFICIAL USE ONLY

### DECISION ON APPEAL:

GRANTED

DENIED

The Building Inspector is hereby directed to issue a permit to the Applicant upon the following and conditions:

\_\_\_\_\_  
Chairperson, Zoning Board of Appeals

\_\_\_\_\_  
Date



**Community Development Department**

45175 Ten Mile Road  
Novi, MI 48375  
(248) 347-0415 Phone  
(248) 735-5600 Facsimile  
[www.cityofnovi.org](http://www.cityofnovi.org)

**REVIEW STANDARDS  
DIMENSIONAL VARIANCE**

The Zoning Board of Appeals (ZBA) will review the application package and determine if the proposed Dimensional Variance meets the required standards for approval. In the space below, and on additional paper if necessary, explain how the proposed project meets each of the following standards. (Increased costs associated with complying with the Zoning Ordinance will not be considered a basis for granting a Dimensional Variance.)

**Standard #1. Circumstances or Physical Conditions.**

Explain the circumstances or physical conditions that apply to the property that do not apply generally to other properties in the same zoning district or in the general vicinity. Circumstances or physical conditions may include:

- a. **Shape of Lot.** Exceptional narrowness, shallowness or shape of a specific property in existence on the effective date of the Zoning Ordinance or amendment.  
 Not Applicable     Applicable    If applicable, describe below:

*and/or*

- b. **Environmental Conditions.** Exceptional topographic or environmental conditions or other extraordinary situations on the land, building or structure.  
 Not Applicable     Applicable    If applicable, describe below:

*and/or*

- c. **Abutting Property.** The use or development of the property immediately adjacent to the subject property would prohibit the literal enforcement of the requirements of the Zoning Ordinance or would involve significant practical difficulties.  
 Not Applicable     Applicable    If applicable, describe below:

## **Standard #2. Not Self-Created.**

Describe the immediate practical difficulty causing the need for the Dimensional Variance, that the need for the requested variance is not the result of actions of the property owner or previous property owners (i.e., is not self-created).

## **Standard #3. Strict Compliance.**

Explain how the Dimensional Variance in strict compliance with regulations governing area, setback, frontage, height, bulk, density or other dimensional requirements will unreasonably prevent the property owner from using the property for a permitted purpose, or will render conformity with those regulations unnecessarily burdensome.

## **Standard #4. Minimum Variance Necessary.**


Explain how the Dimensional Variance requested is the minimum variance necessary to do substantial justice to the applicant as well as to other property owners in the district.

## **Standard #5. Adverse Impact on Surrounding Area.**


Explain how the Dimensional Variance will not cause an adverse impact on surrounding property, property values, or the use and enjoyment of property in the neighborhood or zoning district.

LENGTH REQUIREMENTS FOR BRACED WALL PANELS IN A CONTINUOUSLY SHEATHED WALL TABLE #1				
LENGTH OF BRACED WALL PANEL (INCHES)				MAXIMUM OPENING HEIGHT NEXT TO BRACED WALL PANEL (% OF WALL HEIGHT)
8-FOOT WALL	9-FOOT WALL	10-FOOT WALL	12-FOOT WALL**	
48"	54"	60"	72"	100%
32"	36"	40"	48"	85%
24"	27"	30"	36"	65%


\*THESE VALUES CAN BE REDUCED BY 50% IF SHEATHING IS PROVIDED ON INTERIOR AND EXTERIOR  
\*\*2 FOOT TALL STUDS SUPPORTING ONLY A ROOF MAY BE 2 X 4 @ 16" O.C. IF FOOT TALL STUDS SUPPORTING ONE OR TWO FLOORS AND A ROOF SHALL BE 2 X 6 @ 16" O.C.

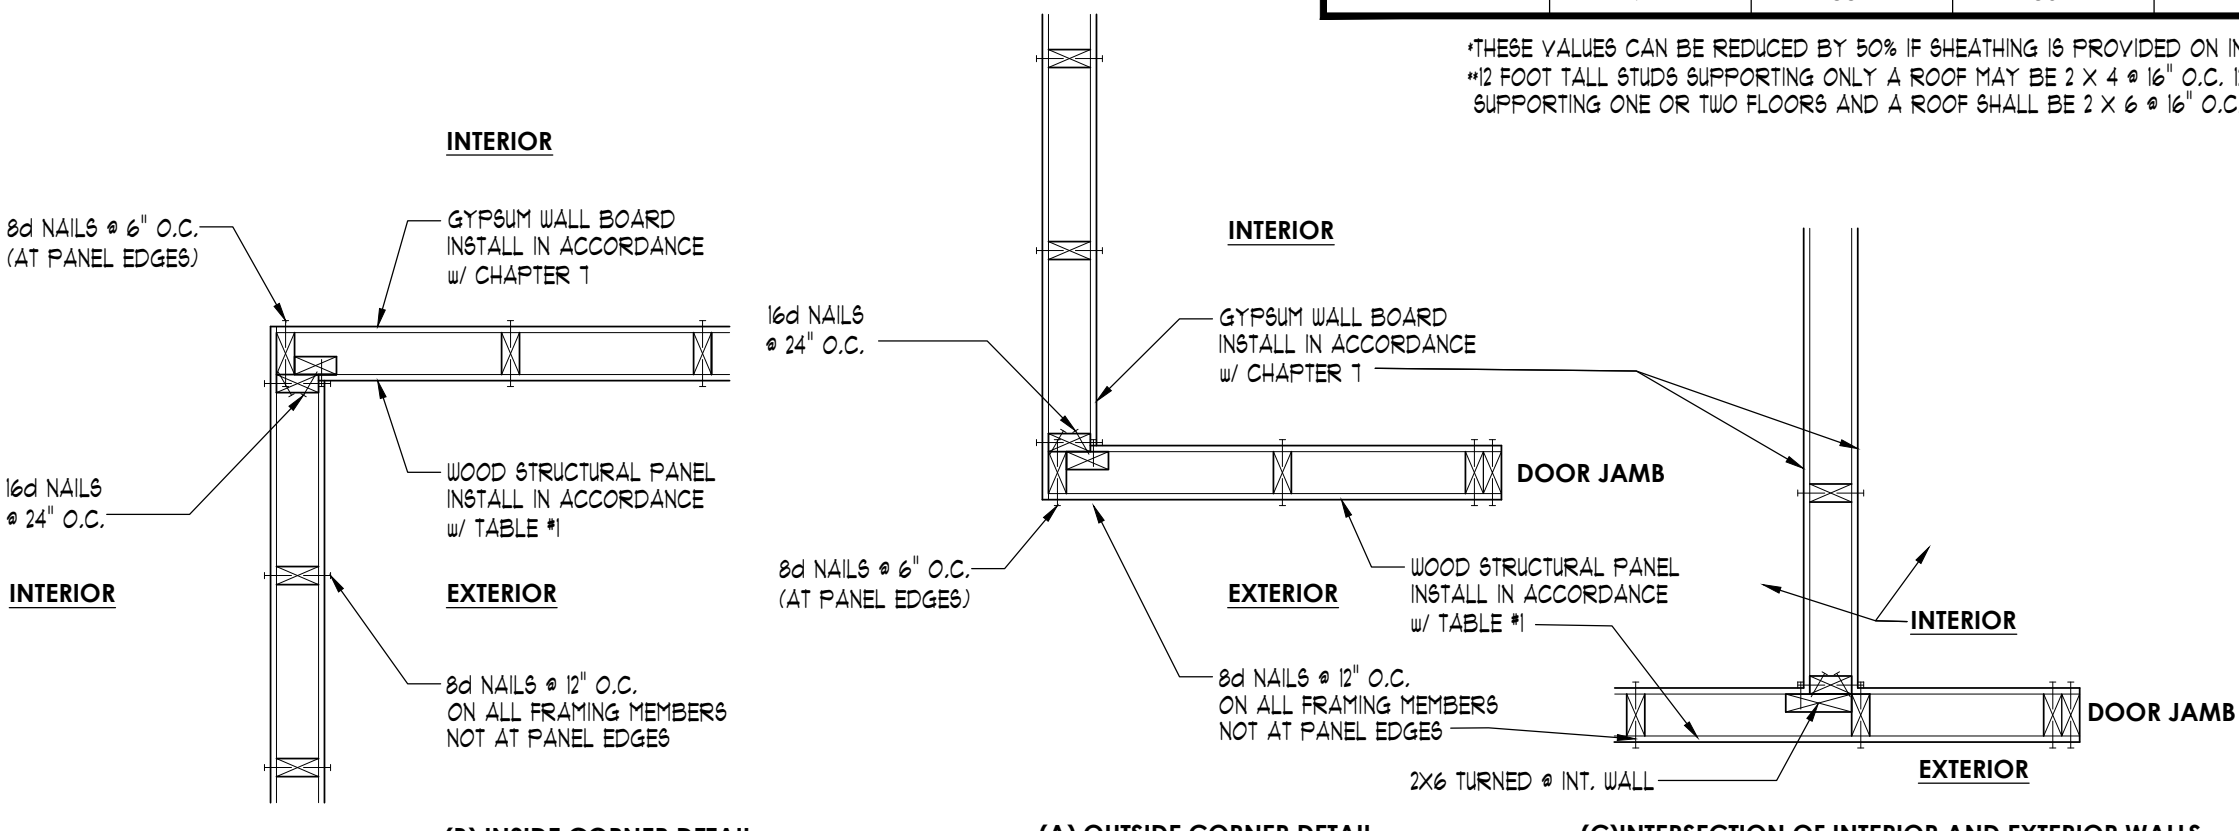

**WALL BRACING DETAIL**  
NO SCALE

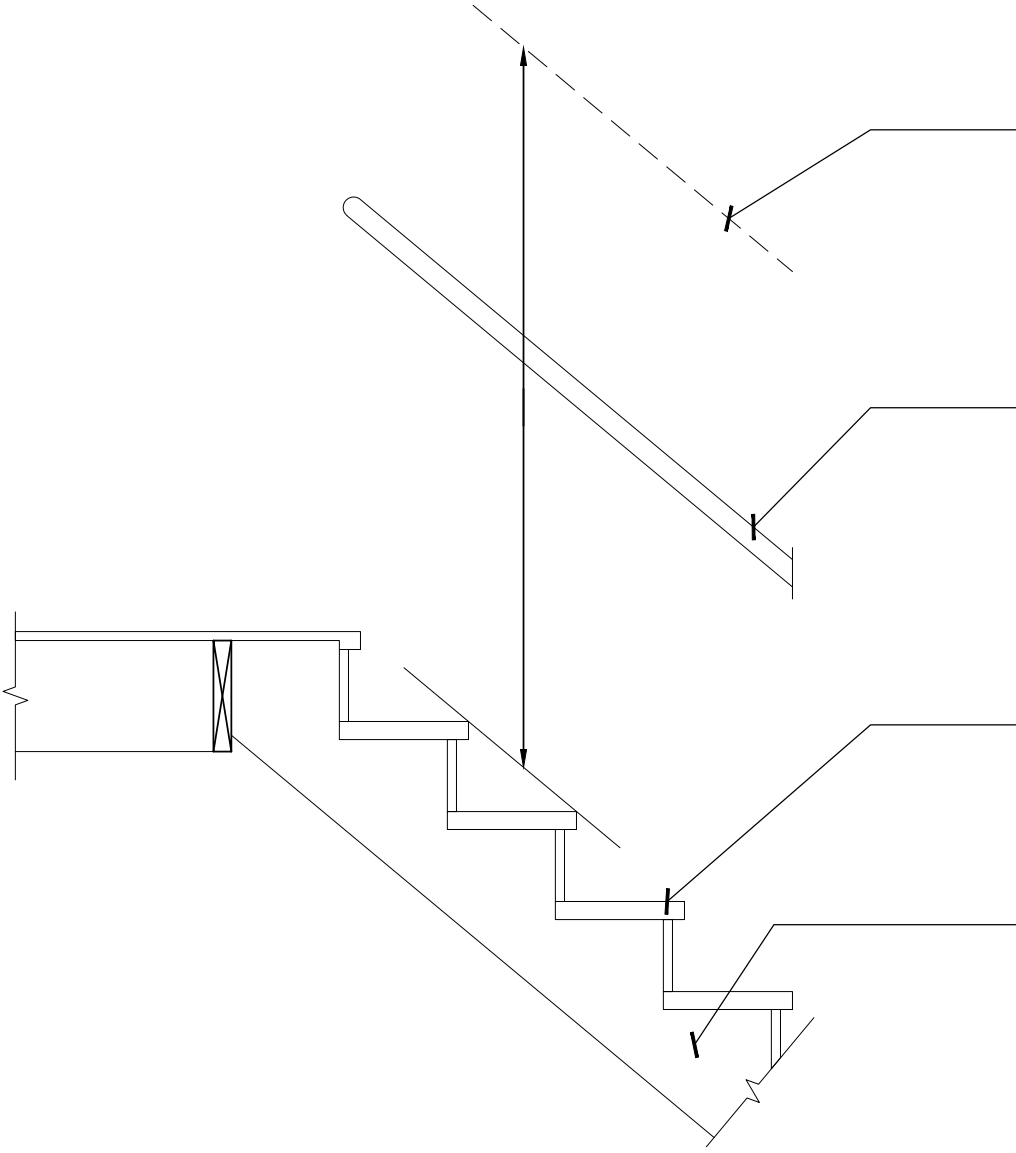

**TYPICAL STAIR DETAIL  
BASEMENT TO GARAGE**  
SCALE: 3/4" = 1'-0"

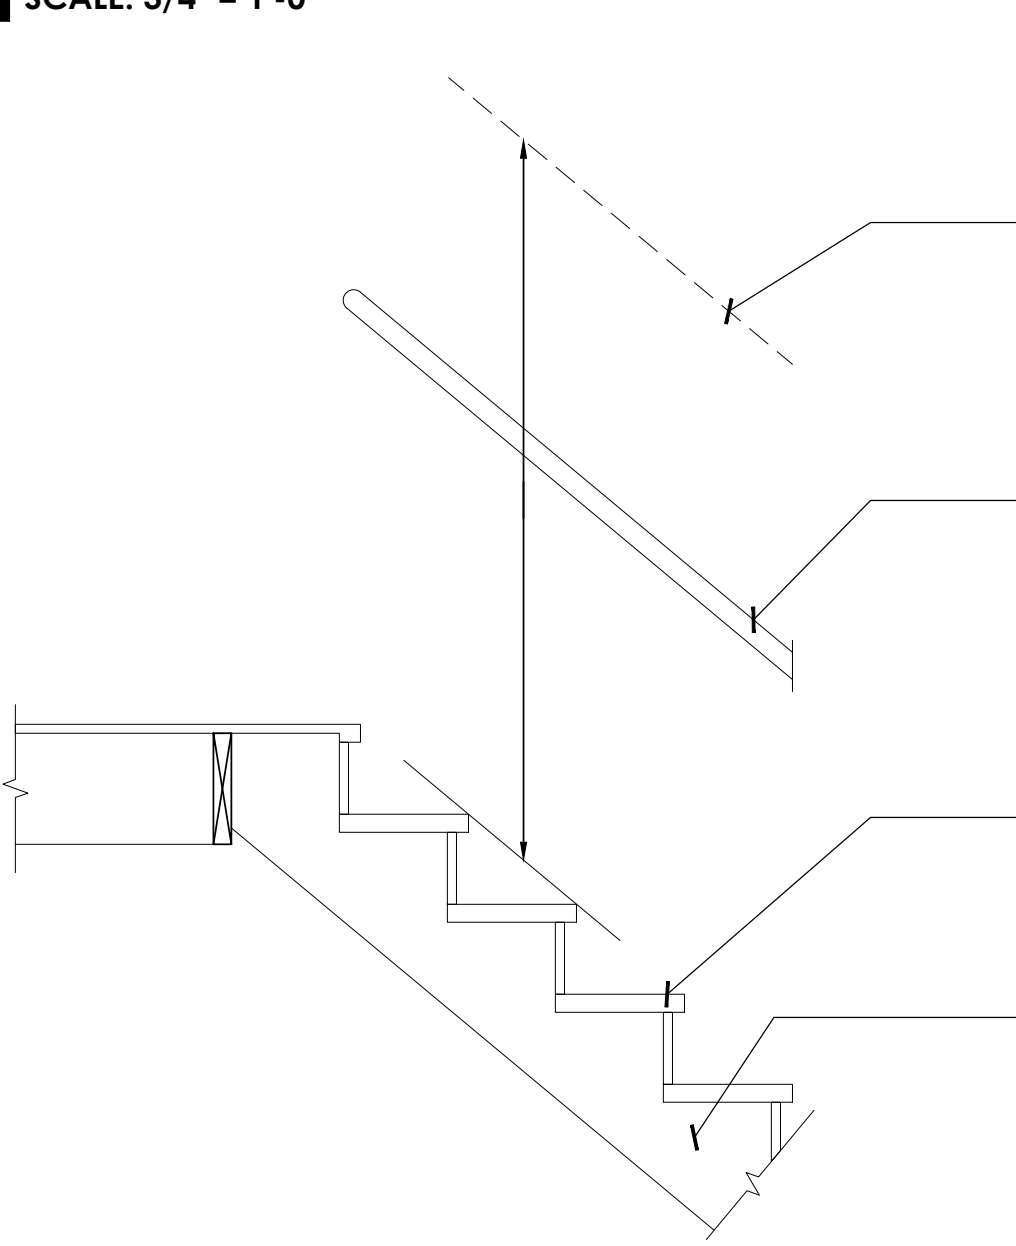

**TYPICAL STAIR DETAIL  
BASEMENT TO FIRST FLOOR**  
SCALE: 3/4" = 1'-0"

**R311.7.2 HEADROOM**  
THE HEADROOM IN STAIRWAYS SHALL BE NOT LESS THAN 6'-8" MEASURED VERTICALLY FROM THE SLOPED LINE ADJOINING THE TREAD NOSING OR FROM THE FLOOR SURFACE OF THE LANDING OR PLATFORM ON THAT PORTION OF THE STAIRWAY.

**R311.7.8 HANDRAILS**  
HANDRAILS THAT HAVE MINIMUM AND MAXIMUM HEIGHTS OF 34" AND 38" RESPECTIVELY, MEASURED VERTICALLY FROM THE NOSING OF THE TREAD.

**R311.7.5 STAIR TREADS AND RISERS**  
14 RISERS W/ RISER HEIGHT # 1 3/4" EACH WITH A TREAD DEPTH OF 10.00" EACH NOSE TO NOSE W/ A NOSE OVERHANG OF 3/8" TO 1/2". THE GREATEST RISER HEIGHT SHALL NOT EXCEED THE SHORTEST BY 3/8". LIKEWISE THE SHORTEST RUN SHALL NOT EXCEED THE GREATEST BY 3/8".

**TYPICAL STRINGERS**  
DOUBLE 2x2 MINIMUM STRINGERS AT ENDS AND ONE (1) STRINGER AT CENTER

**R311.7.2 HEADROOM**  
THE HEADROOM IN STAIRWAYS SHALL BE NOT LESS THAN 6'-8" MEASURED VERTICALLY FROM THE SLOPED LINE ADJOINING THE TREAD NOSING OR FROM THE FLOOR SURFACE OF THE LANDING OR PLATFORM ON THAT PORTION OF THE STAIRWAY.

**R311.7.8 HANDRAILS**  
HANDRAILS THAT HAVE MINIMUM AND MAXIMUM HEIGHTS OF 34" AND 38" RESPECTIVELY, MEASURED VERTICALLY FROM THE NOSING OF THE TREAD.

**R311.7.5 STAIR TREADS AND RISERS**  
18 RISERS W/ RISER HEIGHT # 1 3/8" EACH WITH A TREAD DEPTH OF 10.00" EACH NOSE TO NOSE W/ A NOSE OVERHANG OF 3/8" TO 1/2". THE GREATEST RISER HEIGHT SHALL NOT EXCEED THE SHORTEST BY 3/8". LIKEWISE THE SHORTEST RUN SHALL NOT EXCEED THE GREATEST BY 3/8".

**TYPICAL STRINGERS**  
DOUBLE 2x2 MINIMUM STRINGERS AT ENDS AND ONE (1) STRINGER AT CENTER

**GENERAL NOTES**

**WOOD TRUSS SPECIFICATIONS**

- Designs shall conform with the latest versions of (NDS), 'National Design Specification for Wood Construction' by the American Forest & Paper Association, and Design Standard for Metal Plate Connected Wood Truss Construction by the American Institute of Steel Construction (AISC) and the local code jurisdiction.
- Trusses shall be spaced as indicated on the plans unless the designer determines that different spacing is required to meet deflection requirements.
- Maximum deflection of floor trusses shall be limited to 1/360 for total load and 1/480 for live load. Maximum deflection of roof trusses shall be limited to 1/240 for total load and 1/360 for live load U.L.C.
- Adequate camber shall be built into floor and parallel chord roof trusses to compensate for normal dead load deflection.
- Design loads:

**FLOOR JOIST LOADING CRITERIA**

FIRST FLOOR LOADING:  
LIVE LOAD 40 P.S.F.  
DEAD LOAD 10 P.S.F.  
TOTAL LOAD 50 P.S.F.  
LIVE LOAD DEFLECTION 1/480  
TOTAL LOAD DEFLECTION 1/240

SECOND FLOOR LOADING:  
LIVE LOAD 40 P.S.F.  
DEAD LOAD 10 P.S.F.  
TOTAL LOAD 50 P.S.F.  
LIVE LOAD DEFLECTION 1/480  
TOTAL LOAD DEFLECTION 1/240

FLOOR W/CERAMIC TILE/MARBLE:  
LIVE LOAD 40 P.S.F.  
DEAD LOAD 25 P.S.F.  
TOTAL LOAD 65 P.S.F.  
LIVE LOAD DEFLECTION 1/360  
TOTAL LOAD DEFLECTION 1/360

**EXT. DECK JOIST LOADING CRITERIA**

DECK LOADING:  
LIVE LOAD 30 P.S.F.  
DEAD LOAD 10 P.S.F.  
TOTAL LOAD 40 P.S.F.  
LIVE LOAD DEFLECTION 1/360  
TOTAL LOAD DEFLECTION 1/240

**ROOF TRUSS LOADING CRITERIA**

TOP CHORD LIVE LOAD 20 P.S.F.  
DEAD LOAD 1 P.S.F.  
BOTT. CHORD LIVE LOAD 10 P.S.F. (UNINHABITABLE ATTICS W/OUT STORAGE)  
LIVE LOAD 20 P.S.F. (UNINHABITABLE ATTICS WITH STORAGE)  
DEAD LOAD 10 P.S.F.

WIND LOAD 15 MPH OR AS REQUIRED BY CODE

**CONC. DECK JOIST LOADING CRITERIA**

DECK LOADING:  
LIVE LOAD 30 P.S.F.  
DEAD LOAD 50 P.S.F.  
TOTAL LOAD 80 P.S.F.  
LIVE LOAD DEFLECTION 1/360  
TOTAL LOAD DEFLECTION 1/240

- A 15% increase on allowable stresses for short term loading is allowed. Drift loading shall be accounted for per the current 'Michigan Residential Code' requirements.
- Add additional attic storage live loads per the current 'Michigan Residential Code' requirements.
- Tile, marble, or other special features shall be designed using the appropriate dead loads and deflection limitations. Partition loads shall also be considered where appropriate.
- All conventional framed floor decks shall be 2 x 10 #2 or 2 x 12 #2 Douglas Fir or better.

**HANDLING AND ERECTION SPECIFICATIONS**

- Trusses are to be handled with particular care during fabrication, bundling, loading, delivery, unloading and installation in order to avoid damage and weakening of the trusses.
- Temporary and permanent bracing for holding the trusses in a straight, and plumb position is always required and shall be designed and installed by the erecting contractor. Temporary bracing during installation, includes cross bracing between the trusses to prevent tipping or "doming" of the trusses.
- Permanent bracing shall be installed in accordance with the latest of the 'National Design Standard' as published by the American Forest & Paper Association and H.I.B.-3 and D.S.B.-85 as published by the truss plate institute. Permanent bracing consists of lateral and diagonal bracing not to exceed spacing requirements of the truss fabricator. Top chords of trusses must be continuously braced by roof sheathing unless otherwise noted on the truss shop drawings. Bottom chords must be braced at intervals not to exceed 10' o.c. or as noted on the truss fabricators drawings.
- Construction loads greater than the design loads of the trusses shall not be applied to the trusses at any time.
- No loads shall be applied to the truss until all fastening and required bracing is installed.
- The supervisor of the truss erecting shall be under the direct control of personnel experienced in the installation and proper bracing of wood trusses.
- Field modification or cutting of pre-engineered roof trusses is strictly prohibited without expressed prior written consent and details from a licensed professional structural engineer experienced in wood truss design and modifications.

**SOIL REQUIREMENTS & EARTH WORK AND CONCRETE**

- All top soil, organic and vegetative material should be removed prior to construction. Any required fill shall be clean, granular material compacted to at least 95% of maximum dry density as determined by ASTM D-1557.
- Foundations bearing on existing soils have been designed for a minimum allowable soil bearing capacity of 3000 psf, U.L.C.
- Notify the engineer/architect if the allowable soil bearing capacity is less than 3000 psf so that the foundations can be redesigned for the new allowable bearing capacity.

R401.1 Backfill placement.  
Backfill shall not be placed against the wall until the wall has sufficient strength and has been anchored to the floor above or has been sufficiently braced to prevent damage by the backfill.

R606.2.1 Fill.  
Fill material shall be free of vegetation and foreign material. The fill shall be compacted to assure uniform support of the slab and, except where approved, the fill depths shall not exceed 24 inches for clean sand or gravel and 8 inches for earth.

R606.2.3 Vapor retarder.  
A 6 mil polyethylene or approved vapor retarder with joints lapped not less than 6 inches shall be placed between the concrete floor slab and the base course or the prepared subgrade where no base course exists.

- Concrete work shall conform to the requirements of ACI 301-36, 'Specifications for Structural Concrete for Buildings', except as modified as supplemental requirements.
- Concrete shall have a minimum of 3000 psi, 28 day compressive strength, unless noted otherwise. (4 sacks of a water/cement ratio not to exceed 6 gallons per sack). Exterior concrete slabs shall have a minimum of 4000 psi, 28 day compressive strength, 4 4% air entrainment.
- The use of additives such as fly ash or calcium chloride is not allowed without prior review from the architect.

R405.1 Concrete or masonry foundations.  
Drains shall be provided around all concrete or masonry foundations that retain earth and enclose habitable or vehicle spaces located below grade. Drainage tiles, gravel or crushed stone drains, perforated pipe or other approved systems or materials shall be installed at or below the area to be protected and shall discharge by gravity or mechanical means into an approved drainage system. Gravel or crushed stone drains shall extend at least 1 foot beyond the outside edge of the footing and 6 inches above the top of the footing and be covered with an approved filter membrane material. The top of open joints of drain tiles shall be protected with strips of building paper, and the drainage tiles or perforated pipe shall be placed on a minimum of 2 inches of washed gravel or crushed rock at least one sieve size larger than the tile joint opening or perforation and covered with not less than 6 inches of the same material.  
Exception:  
A drainage system is not required when the foundation is installed on well-drained ground or sand-gravel mixture soils according to the Unified Soil Classification System, Group I soils, as detailed in Table R405.1.

**STRUCTURAL STEEL SPECIFICATIONS**

- Structural steel shapes, plates, bars, etc. are to be ASTM A-36 (unless noted other wise) designed and constructed per the 1989 AISC 'Specifications For The Design, Fabrication, and Erection Of Steel For Buildings', and the latest edition of the AISC 'Manual Of Steel Construction'.
- Steel columns shall be ASTM A-500, Fy36 KSI. Structural tubing shall be ASTM A500, grade B, Fy46 KSI.
- Welds shall conform with the latest AWS D11.1 'Specifications For Welding In Building Construction', And shall utilize E70XX electrodes unless noted otherwise.
- Bolted connections shall utilize ASTM A-325 bolts tightened to a ' snug fit' condition (unless noted otherwise).

**REINFORCING STEEL SPECIFICATIONS**

- Reinforcing bars, deails and ties shall conform to ASTM-615 grade 60 requirements and shall be free of rust, dirt, and mud.
- Welded wire fabric shall conform to ASTM A-185 and be positioned at the mid height of slabs U.L.C.
- Reinforcing shall be placed and securely tied in place sufficiently ahead of placing of concrete to allow inspection and correction, if necessary without delaying the concrete placement.
- Extend reinforcing bars a minimum of 36" around corners and lap bars at splices a minimum of 24" U.L.C.
- Welding of reinforcing steel is not allowed.

**STAIRWAYS AND HANDRAILS**

R311.1.1 Width.  
Stairways shall not be less than 36 inches (914 mm) in clear width at all points above the permitted handrail height and below the required headroom height. Handrails shall not project more than 4.5 inches (114 mm) on either side of the stairway and the minimum clear width of the stairway at and below the handrail height, including treads and landings, shall not be less than 3'-7" (107 mm) where a handrail is installed on one side and 27 inches (686 mm) where handrails are provided on both sides.  
Exception: The width of spiral stairways shall be in accordance with Section R311.10.1.

R311.1.8 Handrails.  
Handrails shall be provided on at least one side of each continuous run of treads or flights with four or more risers.

R311.1.8.1 Height.  
Handrail height, measured vertically from the sloped plane adjoining the tread nosing, or finish surface of ramp slope, shall be not less than 34 inches (864 mm) and not more than 38 inches (965 mm).

- The use of a volute, turnout or starting easing shall be allowed over the lowest tread.
- When handrail fittings or bendings are used to provide continuous transition between flights, the transition from handrail to guardrail, or used at the start of a flight, the handrail height at the fittings or bendings shall be permitted to exceed the maximum height.

**SMOKE ALARMS**

- R314.3 Smoke Alarms  
Smoke alarms shall be installed in the following locations:  
1. In each sleeping room.  
2. Outside each separate sleeping area in the immediate vicinity of the bedrooms.  
3. On each additional story of the dwelling, including basements and habitable attics but not including crawl spaces and uninhabitable attics. In dwellings or dwelling units with split levels and without an intervening door between the adjacent levels, a smoke alarm installed on the upper level shall suffice for the adjacent lower level provided that the lower level is less than one full story below the upper level.

When more than one smoke alarm is required to be installed within an individual dwelling unit, the alarm devices shall be interconnected in such a manner that the activation of one alarm will activate all of the alarms in the individual unit.

**CARBON MONOXIDE DETECTOR**

A Carbon monoxide device shall be located in the vicinity of the bedrooms, which may include 1 device capable of detecting carbon monoxide near all adjacent bedrooms in areas within the dwelling adjacent to an attached garage, and in areas adjacent to any fuel-burning appliances. Carbon Monoxide Detectors shall not be placed within fifteen feet of fuel-burning heating or cooking appliances such as gas stoves, furnaces, or fireplaces, or in or near very high areas such as bathrooms.

**FLASHING AND WEEPHOLES**

R703.8.5 Flashing.  
Flashing shall be located beneath the first course of masonry above finished ground level above the foundation wall or slab and at other points of support, including structural floors, shell angles and lintels when masonry veneers are designed in accordance with Section R703.7. See Section R703.8 for additional requirements.

R703.8.6 Weepholes.  
Weepholes shall be provided in the outside wythe of masonry walls at a maximum spacing of 33 inches (838 mm) on center. Weepholes shall not be less than 3/16 inch (5 mm) in diameter. Weepholes shall be located immediately above the flashing.

R703.4 Flashing.  
Approved corrosion-resistant flashing shall be applied shingle-fashion in a manner to prevent entry of water into the wall cavity or penetration of water to the building structural framing components. Self-adhered membranes used as flashing shall comply with ASTM A117. The flashing shall extend to the surface of the exterior wall finish. Approved corrosion-resistant flashings shall be installed at all of the following locations:

- Exterior window and door openings. Flashing at exterior window and door openings shall extend to the surface of the exterior wall finish or to the water-resistive barrier for subsequent drainage.
- At the intersection of chimneys or other masonry construction with frame or stucco walls, with projecting lips on both sides under stucco copings.
- Under and at the ends of masonry, wood or metal copings and sills.
- Continuously above all projecting wood trim.
- Where exterior porches, decks or stairs attach to a wall or floor assembly of wood-frame construction.
- At wall and roof intersections, I.T. At built-in gutters.

**FIREPLACES**

R100.10 Hearth extension dimensions.  
Hearth extensions shall extend at least 16 inches (406 mm) in front of and at least 8 inches (203 mm) beyond each side of the fireplace opening, 1 or larger, 2 where the fireplace opening is 6 square feet (0.6 m<sup>2</sup>) the hearth extension shall extend at least 20 inches (508 mm) in front of and at least 12 inches (305 mm) beyond each side of the fireplace opening.

**EGRESS WINDOW REQUIREMENTS**

- Min. net clear opening of 5.7 sq. ft. (second floor bedrooms)
- Min. net clear opening of 5.0 sq. ft. (first floor bedrooms)
- Min. net clear opening ht. of 24 inches
- Min. net clear opening width of 20 inches
- Max. sill ht. above finish floor of 44 inches

**AREAS THAT REQUIRE SAFETY GLAZING**

R308.4 Hazardous locations.  
The locations specified in Sections R308.4.1 through R308.4.7 shall be considered to be specific hazardous for the purposes of glazing.

R308.4.1 Glazing in doors.  
Glazing in fixed and operable panels of swinging, sliding and bifold doors considered to be a hazardous location.

- Exceptions:
- Glazed openings of a size through which a 3-inch diameter (76 mm) sphere is unable to pass.
  - Decorative glazing.

R308.4.1 Glazing adjacent to doors.  
Glazing in an individual fixed or operable panel adjacent to a door shall be considered to be a hazardous location where the bottom exposed edge of the glazing is less than 60 inches (1524 mm) above the floor or walking surface and it meets either of the following conditions:

- Where the glazing is within 24 inches (610 mm) of either side of the door in the plane of the door in a closed position.
- Where the glazing is on a wall perpendicular to the plane of the door in a closed position and within 24 inches (610 mm) of the hinge side of an in-swinging door.

- Exceptions:
- Decorative glazing.
  - Where there is an intervening wall or other permanent barrier between the door and the glazing.
  - Where access through the door is to a closet or storage area 3 feet (914 mm) or less in depth. Glazing in this application shall comply with Section R308.4.3.
  - Glazing that is adjacent to the fixed panel of patio doors.

R308.4.3 Glazing in windows.  
Glazing in an individual fixed or operable panel that meets all of the following conditions shall be considered to be a hazardous location:

- The exposed area of an individual pane is larger than 9 square feet (0.836 m<sup>2</sup>)
- The bottom edge of the glazing is less than 18 inches (457 mm) above the floor.
- The top edge of the glazing is more than 36 inches (914 mm) above the floor; and
- One or more walking surfaces are within 36 inches (914 mm), measured horizontally and in a straight line, of the glazing.

- Exceptions:
- Decorative glazing.
  - When a horizontal rail is installed on the accessible side(s) of the glazing 34 to 38 inches (864 to 965) above the walking surface. The rail shall be capable of withstanding a horizontal load of 50 pounds per linear foot (730 N/m) without contacting the glass and a minimum of 1/2 inch (38 mm) in cross sectional height.
  - Outboard panes in insulating glass units and other multiple glazed panels when the bottom edge of the glass is 25 feet (7620 mm) or more above grade, a roof, walking surfaces, or other horizontal surface within 45 degrees (0.78 rad.) of horizontal surface adjacent to the glass exterior.

R308.4.4 Glazing in guards and railings.  
Glazing in guards and railings, including structural baluster panels and nonstructural in-fill panels, regardless of area or height above a walking surface shall be considered to be a hazardous location.

R308.4.5 Glazing and wet surfaces.  
Glazing in walls, enclosures or fences containing or facing hot tubs, spas, whirlpools, saunas, steam rooms, showers and indoor swimming pools where the bottom exposed edge of the glazing is less than 60 inches (1524 mm) measured vertically above any standing or walking surface shall be considered to be a hazardous location. This shall apply to single glazing and each pane in multiple glazing.


Exceptions:  
Glazing that is more than 60 inches (1524 mm), measured horizontally and in a straight line, from the user's edge of a bathtub, hot tub, spa, whirlpool or swimming pool or from the edge of a shower, sauna or steam room.

R308.4.6 Glazing adjacent to stairs and ramps.  
Glazing where the bottom exposed edge of the glazing is less than 36 inches (914 mm) above the plane of the adjacent walking surface of stairways, landings between flights of stairs and ramps shall be considered to be a hazardous location.

- Exceptions:
- Where a rail is installed on the accessible side(s) of the glazing 34 to 38 inches (864 to 965 mm) above the walking surface. The rail shall be capable of withstanding a horizontal load of 50 pounds per linear foot (730 N/m) without contacting the glass and have a cross-sectional height of not less than 1 1/2 inches (38 mm).
  - Glazing 36 inches (914 mm) or more measured horizontally from the walking surface.

R308.4.7 Glazing adjacent to the bottom stair landing.  
Glazing adjacent to the landing at the bottom of a stairway where the glazing is less than 36 inches (914 mm) above the landing and within a 60-inch (1524 mm) horizontal arc less than 180 degrees from the bottom tread nosing shall be considered to be a hazardous location.

Exception:  
The glazing is protected by a guard complying with Section R312 and the place of the glass is more than 18 inches (457 mm) from the ground.

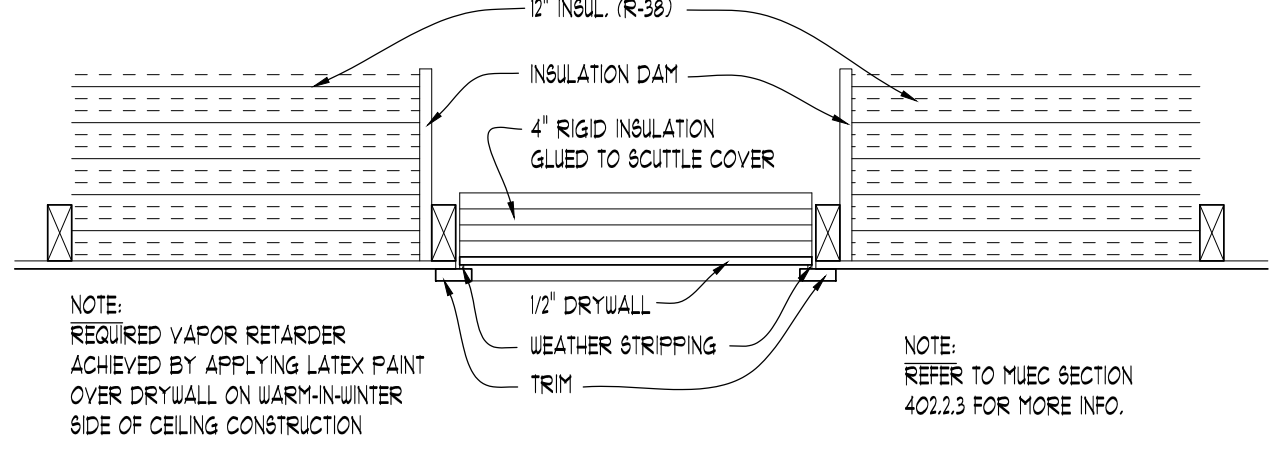

**ATTIC ACCESS DETAIL**  
SCALE: 1" = 1'-0"

**TK DESIGN & ASSOCIATES**  
WWW.TKHOMEDESIGN.COM  
26030 PONTIAC TRAIL, SOUTH LYON, MI 48178  
PHONE: (248)-446-1960  
FAX: (248)-446-1961

**CLIENT / PROJECT**  
COMPO BUILDERS  
MILLEN RESIDENCE  
MONTEBELLO CRT  
LOT 21  
NOVI, MI

**JOB No.** 20-139  
**DRAWN:** AG  
**CHECKED:** BF  
**REVIEW:** 5-1-2020  
**FINAL:** 6-15-2020  
**REVISED:** 6-25-2020  
**REVISED:** 7-14-2020  
**REVISED:** 7-30-2020

**SCALE:** PER PLAN  
**SHEET #**  
GN1

**TABLE R404.1.2(1)**  
MINIMUM HORIZONTAL REINFORCEMENT FOR CONCRETE BASEMENT WALLS<sup>a,b</sup>

MAXIMUM UNSUPPORTED HEIGHT OF BASEMENT WALL (feet)	LOCATION OF HORIZONTAL REINFORCEMENT
≤ 8	One N. 4 bar within 12 inches of the top of the wall story and one No. 4 bar near mid-height of the wall story
> 8	One N. 4 bar within 12 inches of the top of the wall story and one No. 4 bar near third points in the wall story

For Sl: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 pound per square inch = 6.895 kPa.  
 a. Horizontal reinforcement requirements are for reinforcing bars with a minimum yield strength of 40,000 psi and concrete with a minimum concrete compressive strength of 2,500 psi.  
 b. See Section R404.1.2.2 for minimum reinforcement required for foundation walls supporting above-grade concrete walls.

**TABLE R404.1.2(8)**  
MINIMUM VERTICAL REINFORCEMENT FOR 6-, 8-, 10-, 12 INCH NOMINAL FLAT CONCRETE BASEMENT WALLS<sup>a,c,d,e,f,g,h,i,j,k,l,m,n,o</sup>

MAXIMUM WALL HEIGHT (feet)	MAXIMUM UNBALANCED BACKFILL HEIGHT <sup>g</sup> (feet)	MINIMUM VERTICAL REINFORCEMENT - BAR SIZE AND SPACING (INCHES)												
		Soil classes <sup>e</sup> and design lateral soil (psf per foot of depth)												
		GW, GP, SW, SP 30			GM, GC, SM, SM-SC and ML 45			SC, ML-CL and inorganic CL 60						
Minimum nominal wall thickness (inches)														
6 8 10 12 6 8 10 12 6 8 10 12														
5	4	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	5	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	6	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
6	4	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	5	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	6	NR	NR	NR	NR	5 @ 48	NR	NR	NR	5 @ 36	NR	NR	NR	NR
7	4	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	5	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	6	NR	NR	NR	NR	5 @ 42	NR	NR	NR	6 @ 43	5 @ 48	NR	NR	NR
8	4	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	5	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	6	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
9	4	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	5	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	6	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
10	4	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	5	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR
	6	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR

For Sl: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 pound per square foot per foot = 0.1571 kPa<sup>2</sup>/m, 1 pound per square inch = 6.895 kPa/m<sup>2</sup>.  
 a. Soil classes are in accordance with the Unified Soil Classification System. Refer to Table R405.1.  
 b. Table values are based on reinforcing bars with a minimum yield strength of 40,000 psi.  
 c. Vertical reinforcement with a yield strength of less than 40,000 psi and/or bars of a different size than specified in the table are permitted in accordance with Section R404.1.2.3.7.a and Table R404.1.2(5).  
 d. NR indicates no vertical reinforcement is required, except for 6-inch nominal walls formed with stay-in-place forming systems in which case vertical reinforcement shall be #4@8 inches on center.  
 e. Allowable deflection criterion is L/240, where L is the unsupported height of the basement wall in inches.  
 f. Interpolation is not permitted.  
 g. Where walls will retain 4 feet or more of unbalanced backfill, they shall be laterally supported at the top and bottom before backfilling.  
 h. Vertical reinforcement shall be located to provide a cover of 1.25 inches measured from the inside face of the wall. The center of the steel shall not vary from the specified location by more than the greater of 10 percent of the wall thickness or 3/8-inch.  
 i. Concrete cover for reinforcement measured from the inside face of the wall shall not be less than 3/4-inch. Concrete cover for reinforcement measured from the outside face of the wall shall not be less than 1 1/2 inches for No. 5 bars and smaller, and not less than 2 inches for larger bars.  
 j. DR means design is required in accordance with the applicable building code, or where there is no code in accordance with ACI 318.  
 k. Concrete shall have a specified compressive strength, f<sub>c</sub>, of not less than 2,500 psi at 28 days, unless a higher strength is required by footnote l or m.  
 l. The minimum thickness is permitted to be reduced 2 inches, provided the minimum specified compressive strength of concrete, f<sub>c</sub>, is 4,000 psi.  
 m. A plain concrete wall with a minimum nominal thickness of 12 inches is permitted, provided minimum specified compressive strength of concrete, f<sub>c</sub>, is 3,500 psi.  
 n. See Table R408.3 for tolerance from nominal thickness permitted for flat walls.  
 o. The use of this table shall be prohibited for soil classifications not shown.

**TABLE R602.10.6.4**  
TENSION STRAP CAPACITY FOR RESISTING WIND PRESSURES PERPENDICULAR TO METHODS PFH, PFG AND CS-PF BRACED WALL PANELS

MINIMUM WALL STUD FRAMING NOMINAL SIZE AND GRADE	MAXIMUM PONY WALL HEIGHT (feet)	MAXIMUM TOTAL WALL HEIGHT (feet)	MAXIMUM OPENING WALL HEIGHT (feet)	TENSION STRAP CAPACITY REQUIRED (pounds) <sup>a,b</sup>							
				Ultimate Design Wind Speed V <sub>w</sub> (mph)							
				110	115	130	110	115	130		
2 x 4 No. 2 Grade	0	10	18	Exposure B			Exposure C				
				1,000	1,000	1,000	1,000	1,000	1,050		
				9	1,000	1,000	1,000	1,000	1,000	1,750	
				16	1,000	1,025	2,050	2,075	2,500	3,950	
				18	1,000	1,275	2,375	2,400	2,850	DR	
				9	1,000	1,000	1,475	1,500	1,875	3,125	
	2	10	16	17.75	2,175	3,525	3,550	4,125	DR		
					18	2,075	2,500	3,950	3,975	DR	DR
					9	1,150	1,500	2,650	2,675	3,175	DR
					16	2,875	3,375	DR	DR	DR	DR
					18	3,425	3,975	DR	DR	DR	DR
					9	2,275	2,750	DR	DR	DR	DR
2	12	12	12	3,225	3,775	DR	DR	DR	DR		
				9	1,000	1,000	1,700	1,700	2,025	3,050	
				16	1,825	2,150	3,225	3,225	3,675	DR	
				18	2,200	2,550	3,725	3,750	DR	DR	
				9	1,450	1,750	2,700	2,725	3,125	DR	
				16	2,050	2,400	DR	DR	DR	DR	
2 x 6 Stud Grade	4	12	18	3,350	3,800	DR	DR	DR	DR		

For Sl: 1 inch = 25.4 mm, 1 mile per hour = 0.447 m/s.  
 a. DR = Design Required.  
 b. Straps shall be installed in accordance with manufacturer's recommendations.

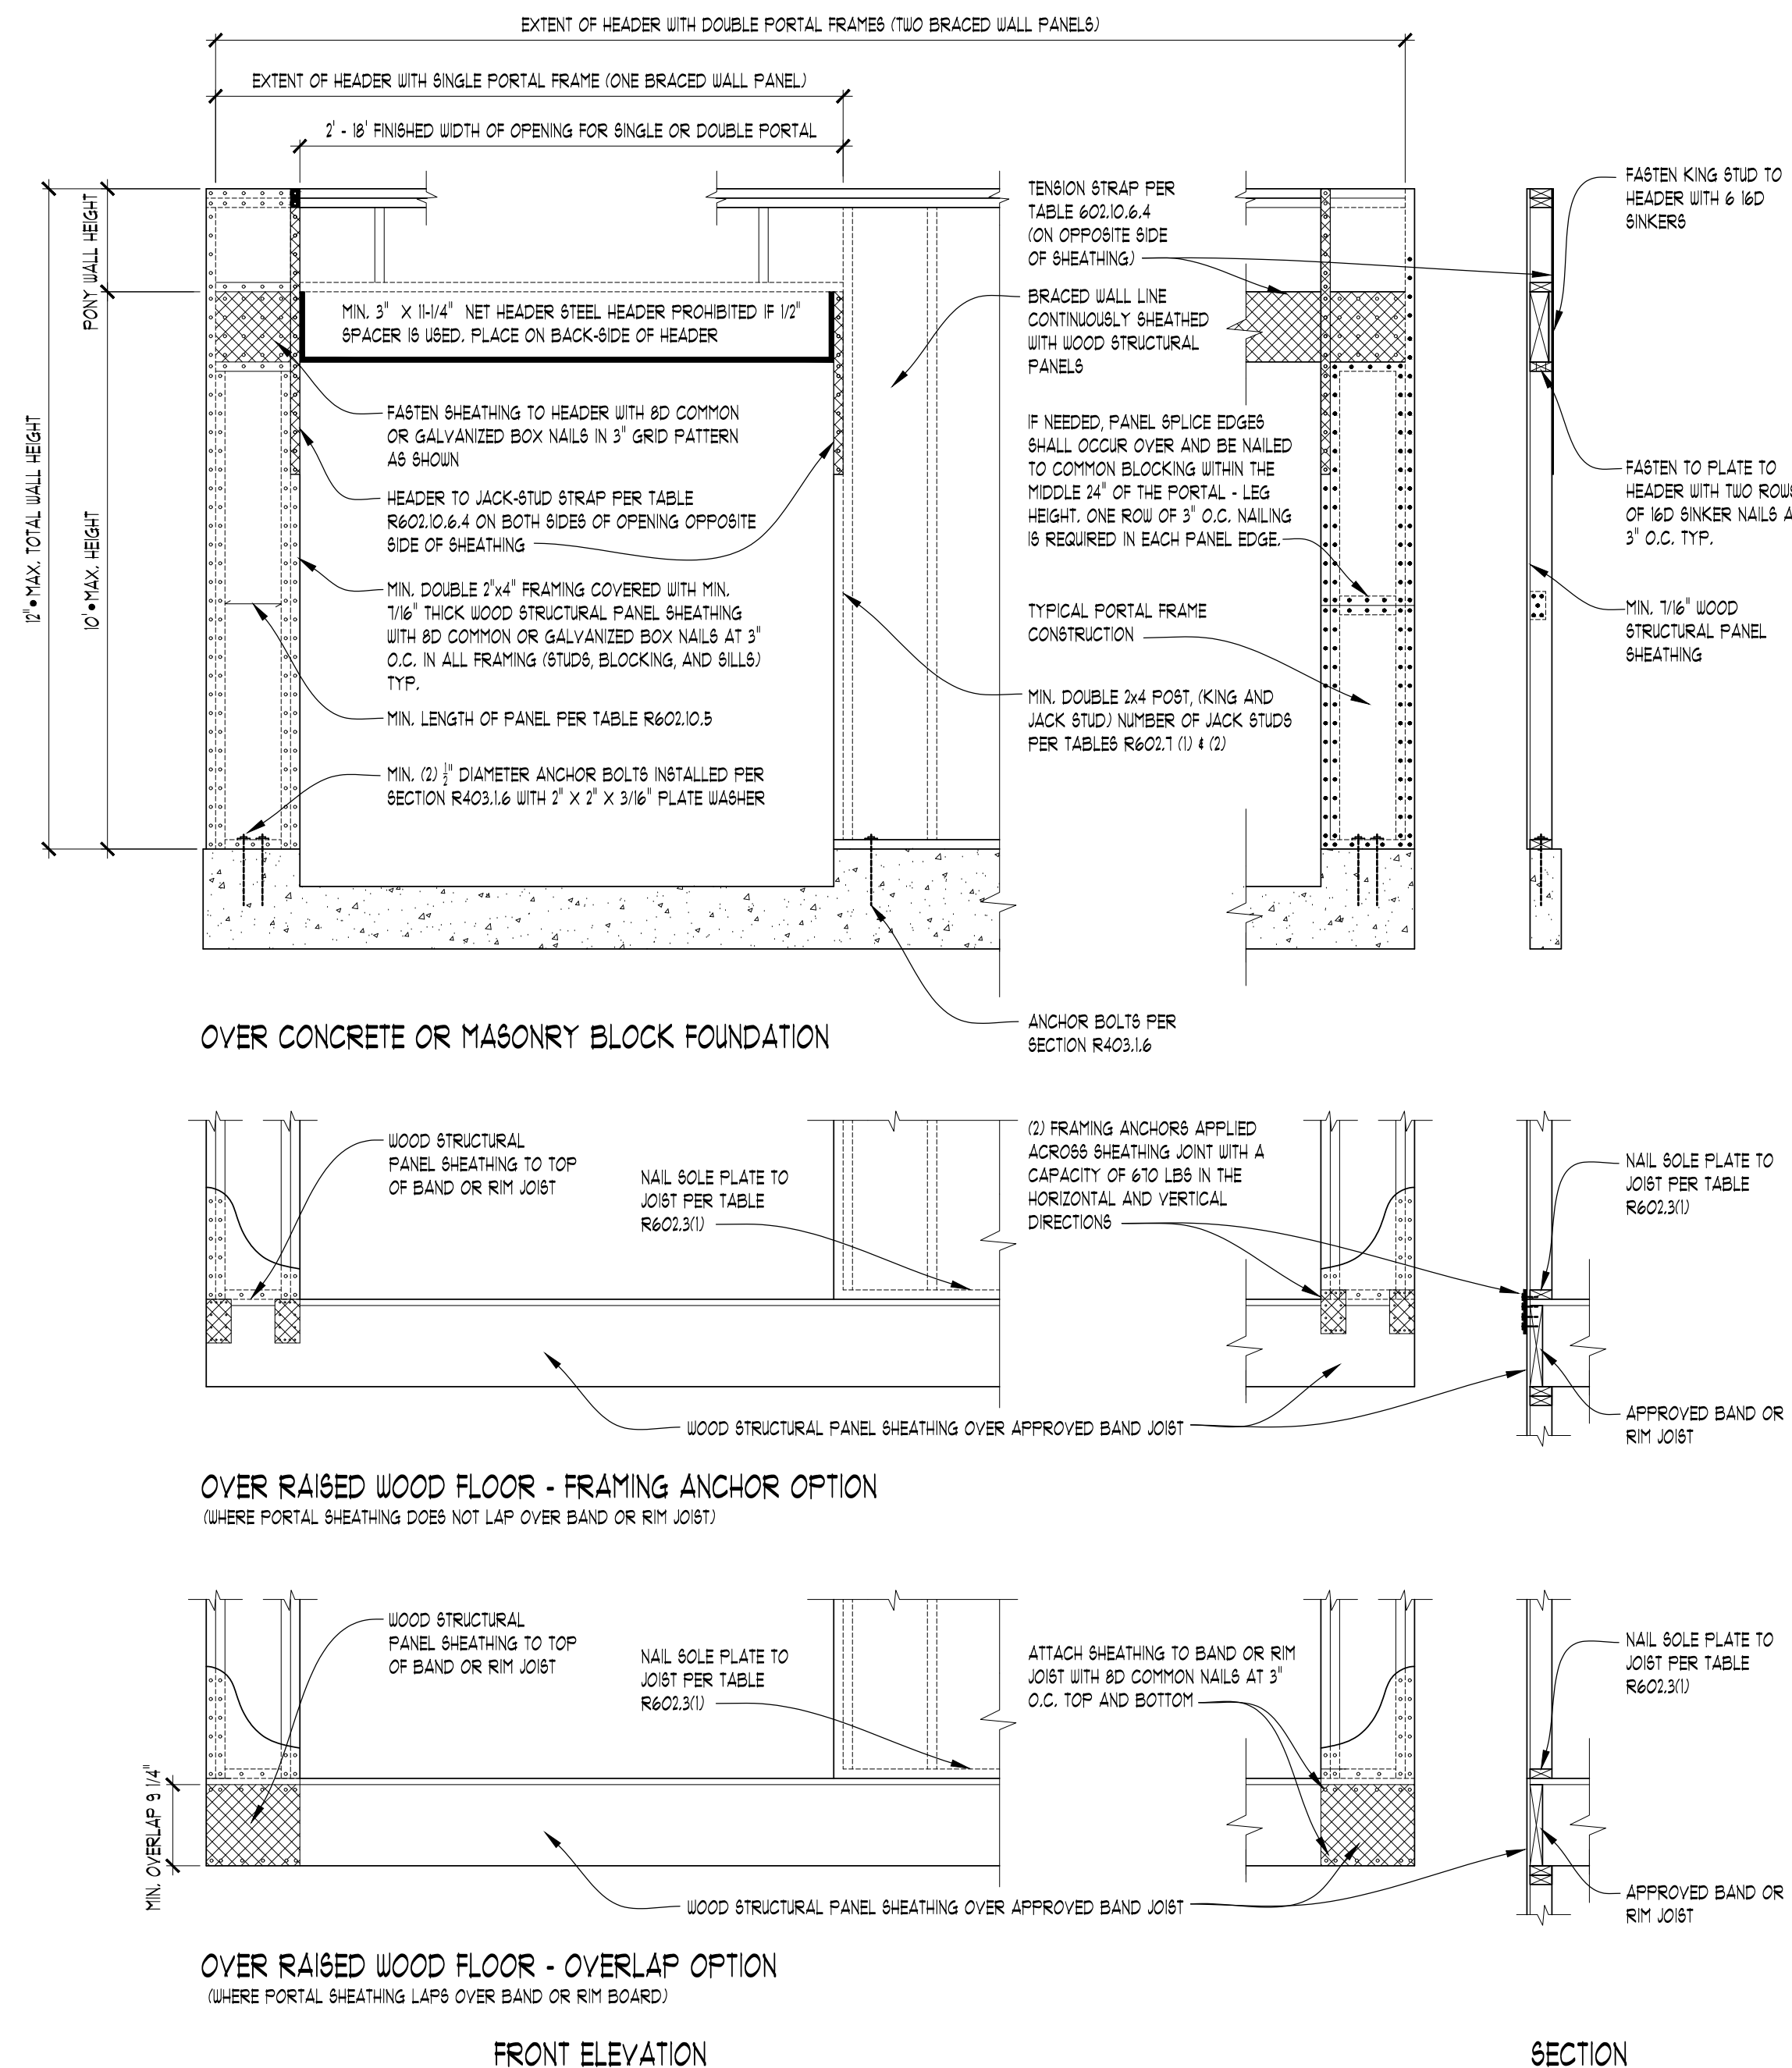


FIGURE R602.10.6.4  
METHOD CS-PF: CONTINUOUSLY SHEATHED PORTAL FRAME PANEL CONSTRUCTION  
FOR Sl: 1 inch = 25.4 mm, 1 foot = 304.8 mm NOT TO SCALE

**TABLE R602.3.(5)**  
SIZE, HEIGHT AND SPACING OF WOOD STUDS<sup>a</sup>.

STUD SIZE (inches)	BEARING WALLS				NONBEARING WALLS	
	Laterally unsupported stud height 'u' (feet)	Maximum spacing when supporting roof-ceiling assembly or a roof-ceiling assembly, only habitable attic (inches)	Maximum spacing when supporting one floor, plus a roof-ceiling assembly or a habitable attic (inches)	Maximum spacing when supporting two floors, plus a roof-ceiling assembly or a habitable attic (inches)	Laterally unsupported stud height 'u' (feet)	Maximum spacing (inches)
2x3 b	-	-	-	-	10	16
2x4	10	24 c	16 c	-	24	24
3x4	10	24	24	16	24	24
2x5	10	24	24	-	24	16
2x6	10	24	24	16	24	24

For Sl: 1 inch = 25.4 mm, 1 foot = 304.8 mm.  
 a. Listed heights are distances between points of lateral support placed perpendicular to the plan of the wall. Bearing walls shall be sheathed on not less than one side or bridging shall be installed not greater than 4 feet apart measured vertically from either end of the stud. Increases in unsupported height are permitted where in compliance with Exception 2 of Section R602.3.1 or designed in accordance with accepted engineering practice.  
 b. Shall not be used in exterior walls.  
 c. A habitable attic assembly supported by 2 x 4 studs is limited to a roof span of 32 feet. Where the roof span exceeds 32 feet, the wall studs shall be increased to 2 x 6 or the studs shall be designed in accordance with accepted engineering practice.

**TABLE R703.8.3.1**  
ALLOWABLE SPANS FOR LINTELS SUPPORTING MASONRY VENEER a,b,c,d

SIZE OF STEEL ANGLE a,d (inches)	NO STORY ABOVE	ONE STORY ABOVE	TWO STORIES ABOVE	NO. OF 3" OR EQUIVALENT REINFORCING BARS b,d
3x3x1/2	6'-0"	4'-6"	3'-0"	1
4x3x1/2	8'-0"	6'-0"	4'-6"	1
5x3x1/2	10'-0"	8'-0"	6'-0"	2
6x3x1/2	14'-0"	9'-6"	7'-0"	2
2-6x3x1/2	20'-0"	12'-0"	9'-6"	4

a. Long leg of angle shall be placed in a vertical position.  
 b. Depth of reinforcing lintels shall not be less than 8 inches and all cells of hollow masonry lintels shall be grouted solid. Reinforcing bars shall extend not less than 8 inches into the support.  
 c. Steel members indicated are adequate typical examples; other steel members meeting structural design requirements shall be permitted to be used.  
 d. Either steel angle or reinforced lintel shall span opening.

**TYPICAL CONVENTIONAL ROOF FRAMING**  
\* RIDGE BEAM SIZE WILL BE EQUAL TO THE RAFTER CUT EDGE \*

RAFTER SPANS	0'-0" - 4'-0"	4'-0" - 8'-0"	8'-0" - 12'-0"	12'-0" - 16'-0"
LUMBER SIZE	2x4	2x6	2x8	2x12

**TK DESIGN & ASSOCIATES**  
 WWW.TKHOMEDESIGN.COM  
 26030 PONTIAC TRAIL, SOUTH LYON, MI 48178  
 PHONE: (248)-446-1960  
 FAX: (248)-446-1961

CLIENT / PROJECT  
 COMPO BUILDERS  
 MILLEN RESIDENCE  
 MONTEBELLO CRT  
 LOT 21  
 NOVI, MI

JOB No. 20-139  
 DRAWN: AG  
 CHECKED: BF  
 REVIEW: 5-1-2020  
 FINAL: 6-15-2020  
 REVISED: 6-25-2020  
 REVISED: 7-14-2020  
 REVISED: 7-30-2020

SCALE:  
 PER PLAN  
 SHEET #  
 GN2



# FOUNDATION NOTES

**NOTE:**  
ALL FOOTINGS ARE DESIGNED FOR 3000 P.S.F. SOIL BRG. CAPACITY 430 P.S.F. ROOF SNOW LOAD. FOR VARYING CONDITIONS REFER TO TABLE R403.1(1), R403.1(2), & R403.1(3) OF THE 2019 IRC.

- ALL COLUMNS SHOWN SHALL BE 3" DIA. SCHEDULE 40 STANDARD STEEL PIPE COLUMN ON 30" X 30" X 18" DEEP CONC. FTG. TOP OF CONCRETE FTG. TO BE 4" BELOW FINISH BASEMENT SLAB. (TYPICAL UNLESS NOTED OTHERWISE)
- WHERE STEEL BEAMS REST ON FOUNDATION WALLS, SIZE BEAM POCKET APPROPRIATELY AND SHIM AS REQUIRED.
- AS REQUIRED DROP FOYER FLOOR SHEATHING 3/4" FOR MUDSET TILE INSTALLATION
- VERIFY ALL UTILITY LOCATIONS W/ BUILDER.
- PROVIDE GUARDRAIL AT STAIRS DURING CONSTRUCTION.
- PROVIDE LADDERING UNDER ANY WALL RUNNING PARALLEL W/ JOIST THAT DOES NOT LAND DIRECTLY ON A JOIST
- PROVIDE SQUASH BLOCKS UNDER ALL BEARING CONDITIONS.
- GROUT SOLID \* BEARING CONDITIONS WHERE BLOCK IS USED.
- PROVIDE 2" X 24" (MIN. R-10) RIGID PERIMETER INSULATION AT ALL BASEMENT SLABS THAT ARE LESS THAN 42" BELOW EXTERIOR FINISHED GRADE


**NOTE:**  
PROVIDE MIN. (2) 2 X 4 HEADER AT ALL INTERIOR & EXTERIOR DOOR & WINDOW OPENINGS (UNLESS NOTED OTHERWISE).

**NOTE:**  
PROVIDE MIN. (1) JACK STUD & (1) KING STUD AT EACH END OF ALL HEADERS (UNLESS NOTED OTHERWISE).

**NOTE:**  
PROVIDE MIN. (1) JOIST OR LADDER FRAMING UNDER ALL UPPER FLOOR PARALLEL PARTITIONS


**NOTE:**  
GROUT ALL CONCRETE BLOCK CORES SOLID THAT SUPPORT POINT LOADS FROM ABOVE (TYPICAL)

**NOTE:**  
 \_\_\_\_\_ WOOD BEAM  
 \_\_\_\_\_ STEEL BEAM  
 [Hatched] BRG. WALL  
 [Dashed] BRG. WALL ABOVE  
 [Dotted] BRG. WALL & BRG. WALL ABOVE  
 [Square] POINT LOAD  
 [Circle] POINT LOAD FROM ABOVE

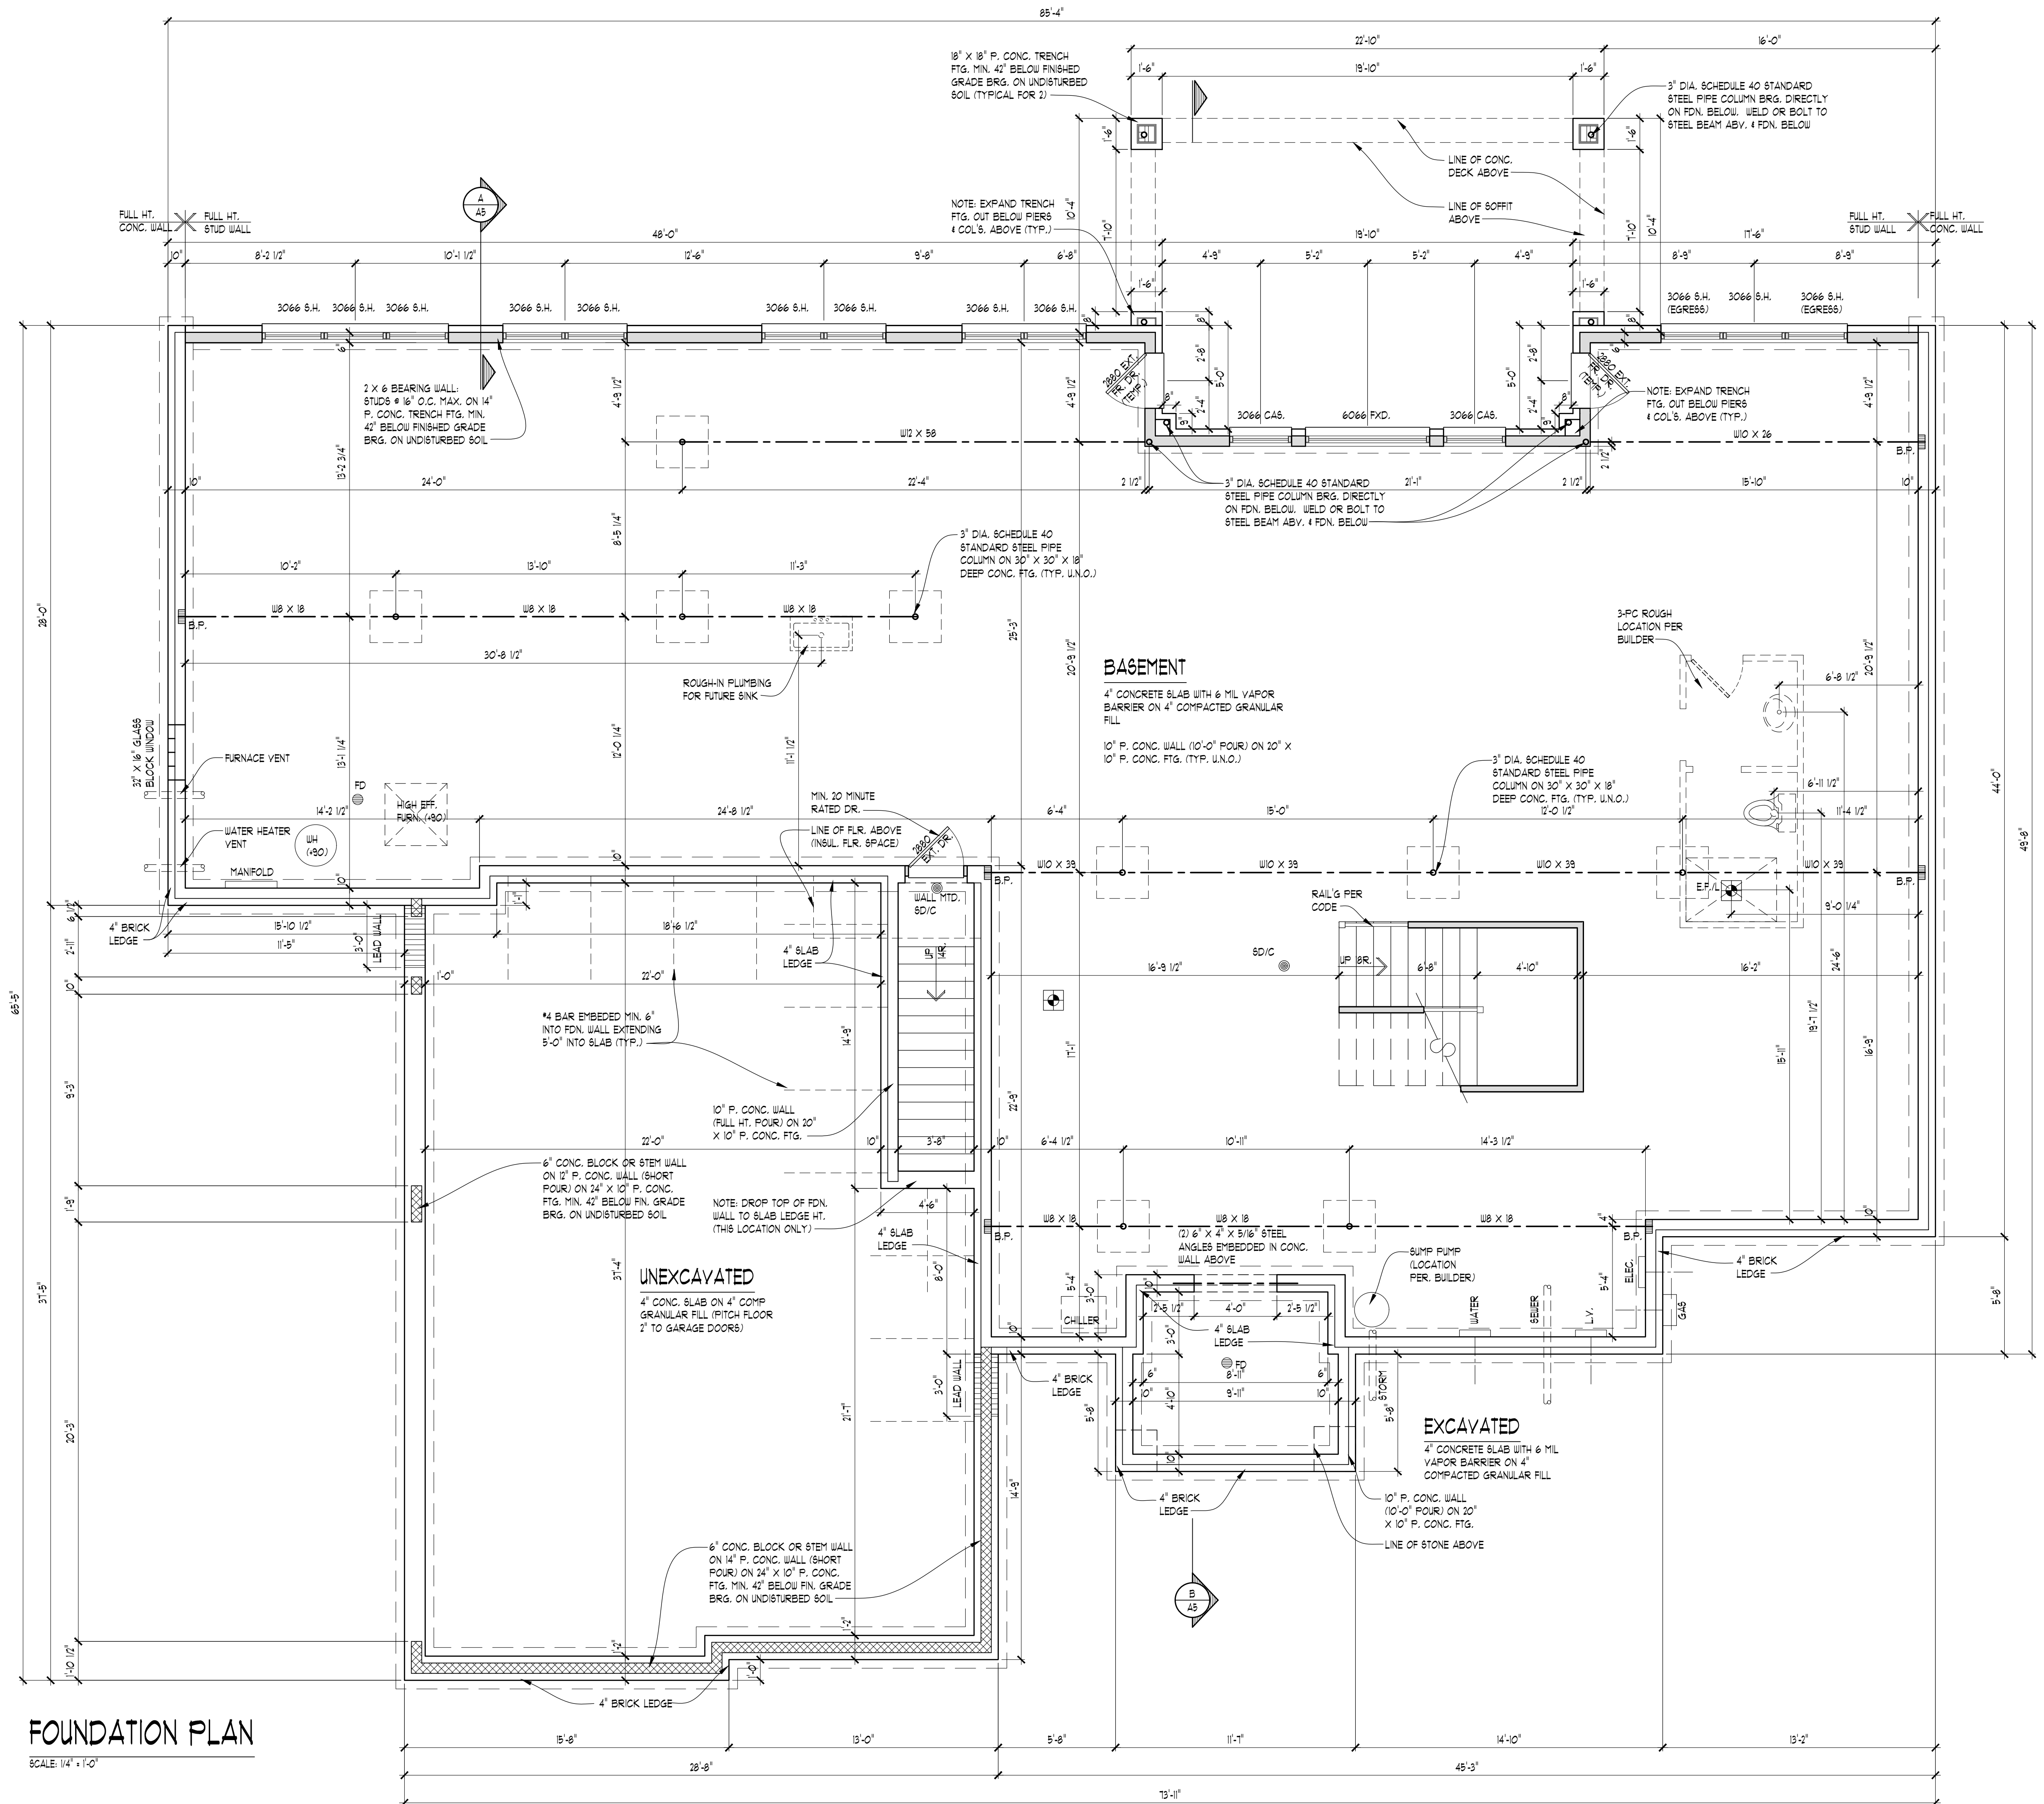

**FOUNDATION PLAN**

SCALE: 1/4" = 1'-0"

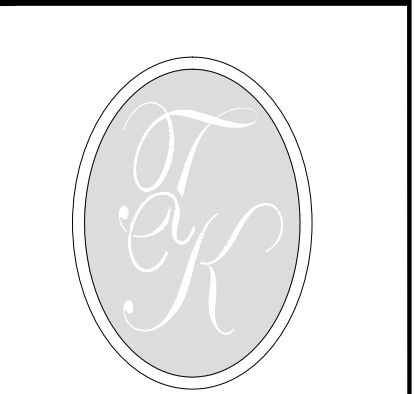

**TK DESIGN & ASSOCIATES**

WWW.TKHOMEDSIGN.COM  
 26030 PONTIAC TRAIL,  
 SOUTH LYON, MI 48178  
 PHONE: (248)-446-1960  
 FAX: (248)-446-1961


COPYRIGHT 2019 TK DESIGN AND ASSOCIATES  
 DO NOT SCALE DRAWINGS. USE CALCULATED DIMENSIONS ONLY.  
 CONTRACTOR TO FIELD VERIFY ALL DRAWING APPLICABLE BEFORE  
 CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE  
 REPORTED TO THE DESIGNER IN WRITING FROM IMMEDIATELY.  
 CALL MTDI 248-446-1961 3 DAYS PRIOR TO ANY EXCAVATION  
 CONSTRUCTION. THE SOLE RESPONSIBILITY OF THE PROFESSIONAL

**CLIENT / PROJECT**  
**COMPO BUILDERS**  
**MILLEN RESIDENCE**  
**MONTIBELLO CRT**  
**LOT 21**  
**NOVI, MI**

**JOB No. 20-139**  
**DRAWN: AG**  
**CHECKED: BF**  
**REVIEW: 5-1-2020**  
**FINAL: 6-15-2020**  
**REVISED 6-25-2020**  
**REVISED 7-14-2020**  
**REVISED 7-30-2020**

**SCALE:**  
**PER PLAN**


**SHEET #**  
**A-1**

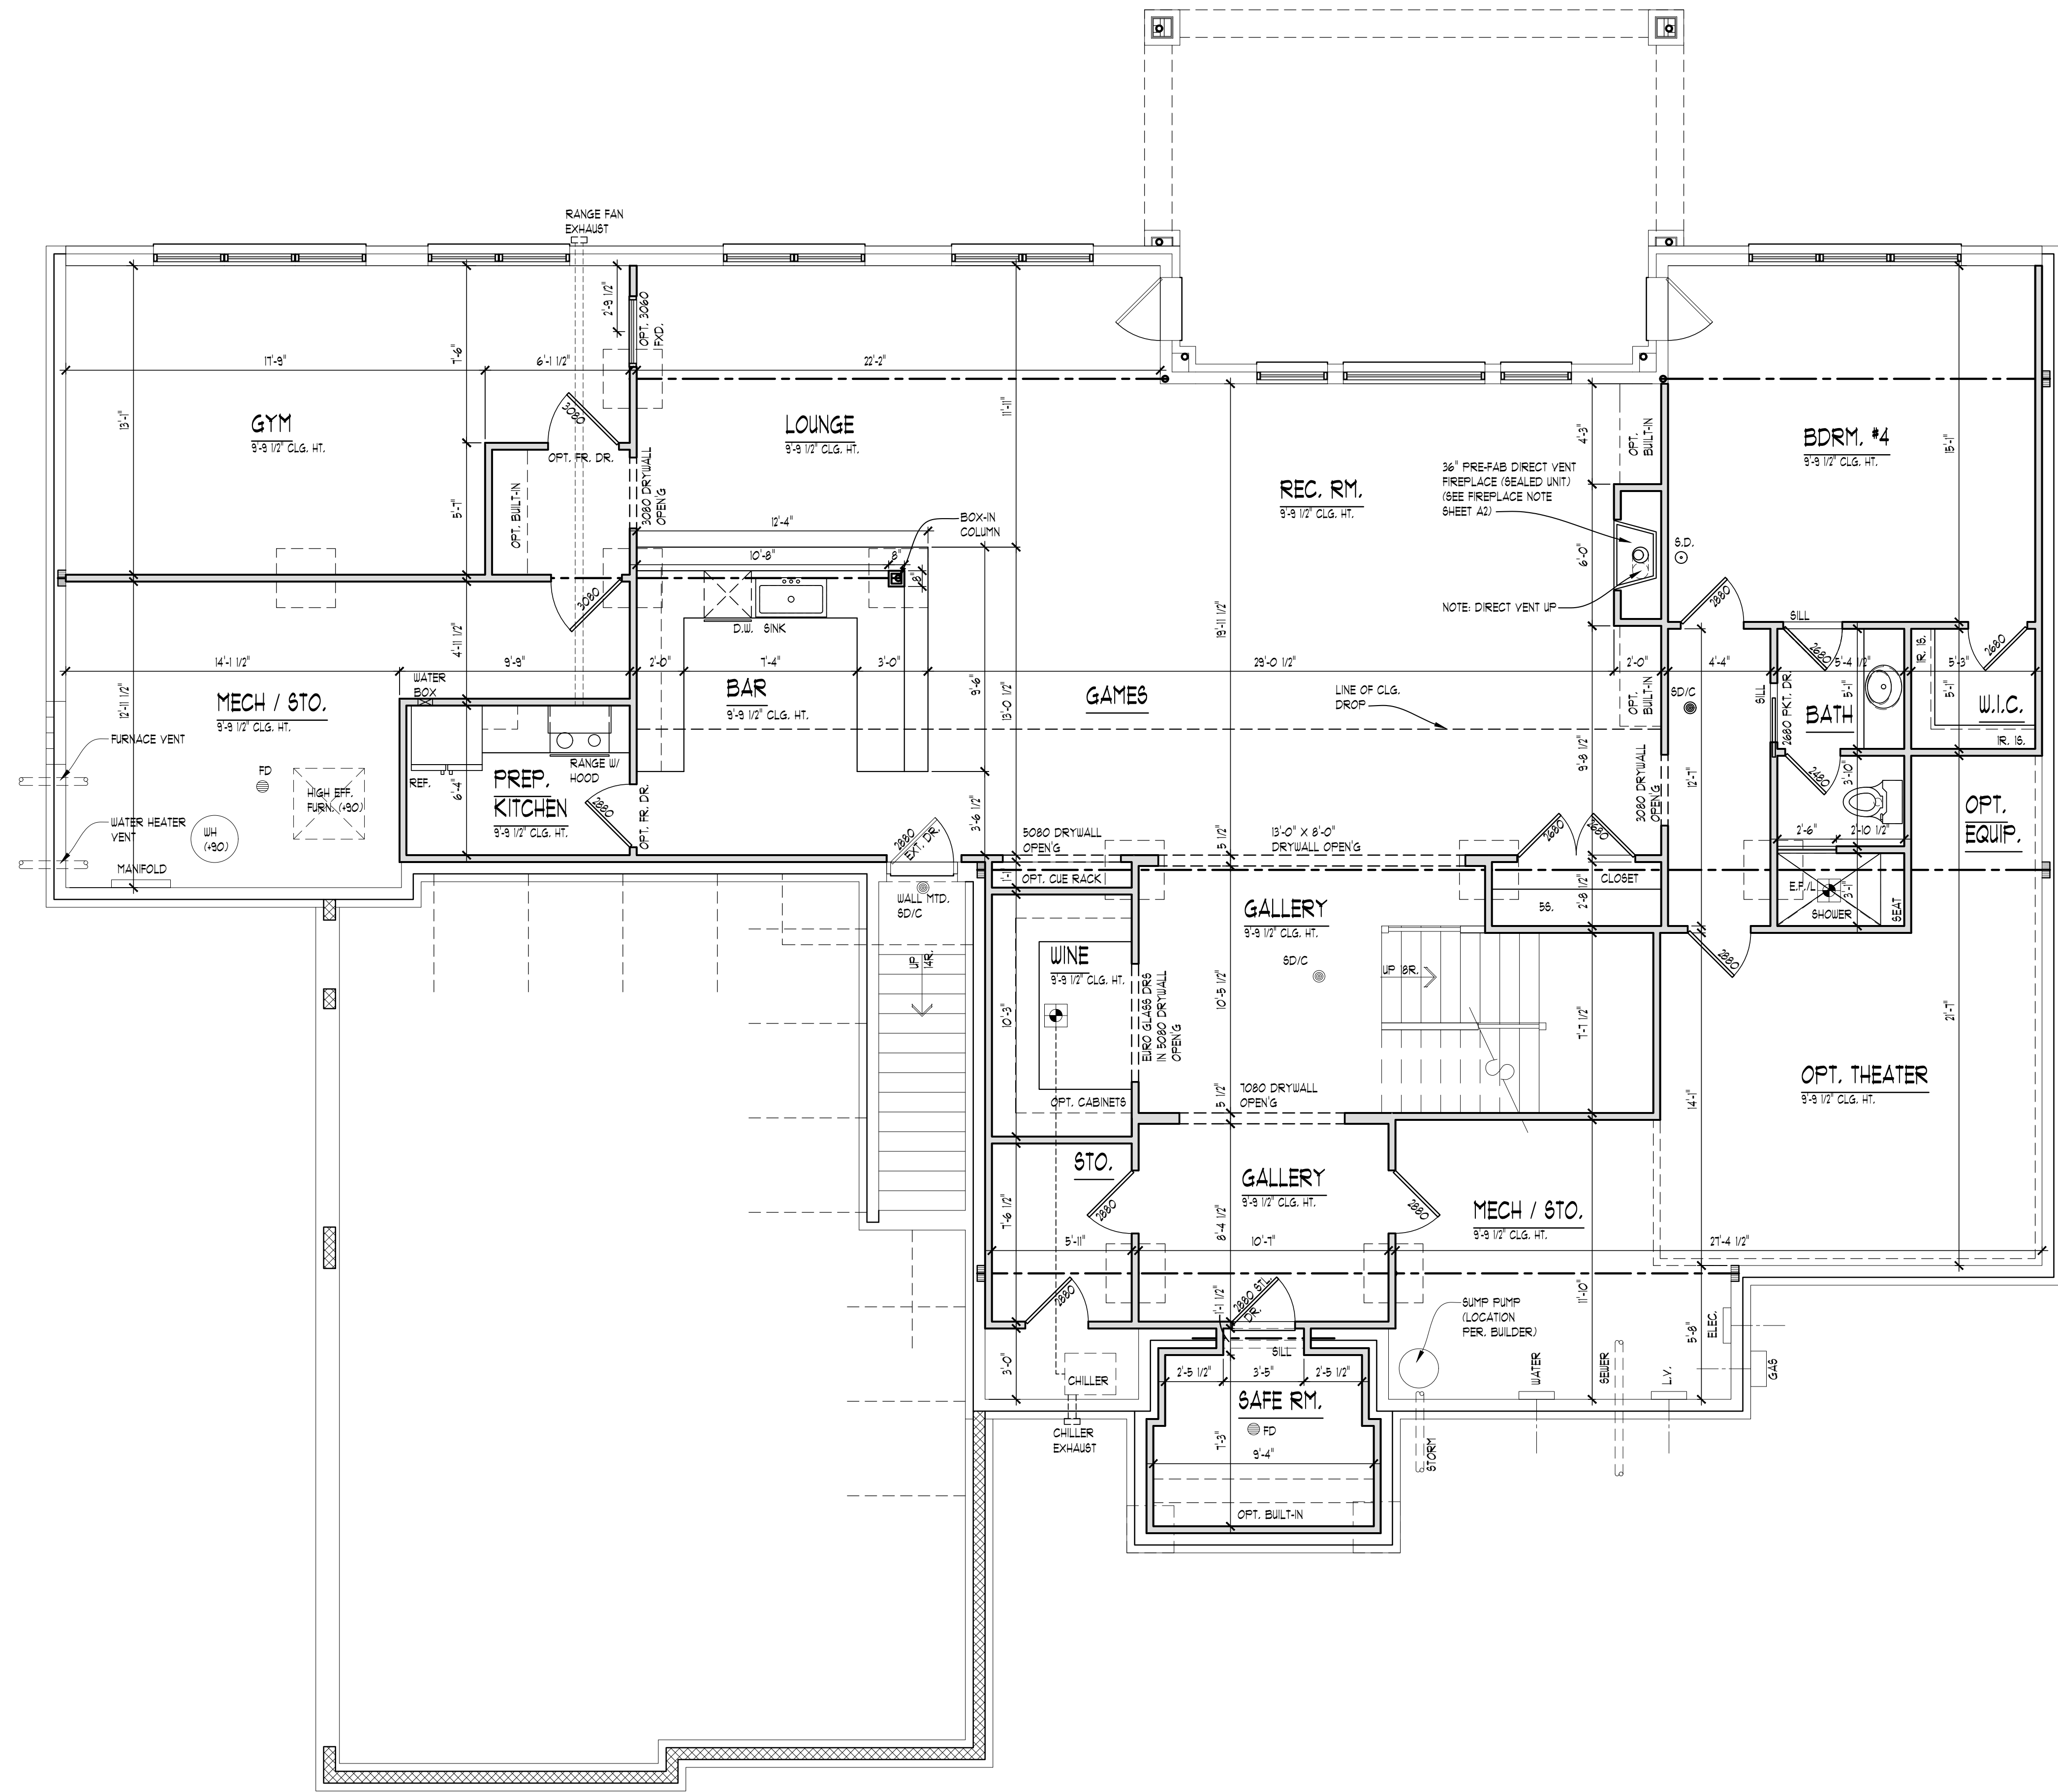

**FINISHED LOWER LEVEL PLAN**

SCALE: 1/4" = 1'-0"

FIN. LOWER LEVEL 2241 S.F.  
 OPT. THEATER / EQUIP. 271 S.F.



**TK DESIGN & ASSOCIATES**

WWW.TKHOMEDESIGN.COM  
 26030 PONTIAC TRAIL,  
 SOUTH LYONS, MI 48178  
 PHONE: (248)-446-1960  
 FAX: (248)-446-1961

COPYRIGHT 2017 TK DESIGN AND ASSOCIATES  
 DO NOT SCALE DRAWINGS. USE CALCULATED DIMENSIONS ONLY.  
 CONSULTOR TO FIELD VERIFY ALL DRAWING ASPECTS BEFORE  
 CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE  
 REPORTED TO THE DESIGNER IN WRITING FROM IMMEDIATELY.  
 CALL MKS DDC AT 800-482-7271 3 DAYS PRIOR TO ANY EXCAVATION  
 CONSTRUCTION. THE SOLE RESPONSIBILITY OF THE FIRM/HOUSEHOLD.

**CLIENT / PROJECT**  
 COMPO BUILDERS  
 MILLEN RESIDENCE  
 MONTEBELLO CRT  
 LOT 21  
 NOVI, MI

JOB No. 20-139  
 DRAWN: AG  
 CHECKED: BF  
 REVIEW: 5-1-2020  
 FINAL: 6-15-2020  
 REVISED 6-25-2020  
 REVISED 7-14-2020  
 REVISED 7-30-2020

SCALE:  
 PER PLAN

SHEET #  
**FB-1**

**PLAN NOTES**

**INTERIOR WALLS:**  
1/2" GYPSUM WALL BOARD ON EACH SIDE OF 2x4 WOOD STUDS @ 16" O.C. 3 1/2" THICK TYPICAL (UNLESS NOTED OTHERWISE). ALL DIMENSION TAKEN FROM STUD EDGES

**EXTERIOR WALLS:**  
SIDING AND/OR MASONRY WITH AIRSPACE, MOISTURE BARRIER PAPER (HOUSE WRAP) ON 1/8" O.S.B. SHEATHING ON 2x6 WOOD STUDS @ 16" O.C. OR AS NOTED. MIN. R-20 WALL CONSTRUCTION, 1/2" GYPSUM WALL BOARD (GLUE & SCREW). WALL TO BE 6" THICK WITH SIDING AND 1/2" THICK WITH MASONRY (TYPICAL UNLESS NOTED OTHERWISE). ALL DIMENSION TAKEN FROM FRAMING (FLOOR PLANS) OR FOUNDATION CORNERS (FOUNDATION PLAN)

1. OPENINGS BETWEEN THE GARAGE AND RESIDENCE SHALL BE EQUIPPED WITH 20-MINUTE FIRE RATED DOORS (OR EQUIVALENT PER 2019 IRC SECTION R302.5.1).
2. VENT ALL EXHAUST FANS TO EXTERIOR.
3. WHEN POSSIBLE DIRECT ALL FLUES AND VENTS THAT PENETRATE ROOF BEHIND MAIN RIDGE.
4. INSTALL WATER SUPPLY AND DRAIN BOX (GREY BOX) AT WASHING MACHINE LOCATION.
5. USE MOISTURE RESISTANT DRYWALL AT ALL AREAS SUSCEPTIBLE TO MOISTURE.
6. ALL FIRST FLOOR INTERIOR DOORS TO BE FRAMED AT OPTIONAL 8'-0" TALL, ALL FINISHED LOWER LEVEL INTERIOR DOORS TO BE FRAMED AT OPTIONAL 8'-0". BUILDER STANDARD FRAME HEIGHT IS 6'-8" UNLESS NOTED OTHERWISE.
7. PROVIDE GUARDRAIL AT STAIRS DURING CONSTRUCTION.
8. PROVIDE SQUASH BLOCKS UNDER ALL BEARING CONDITIONS.
9. GARAGE WALLS TO BE 2x6 STUDS IF OVER 10'-0" TALL.

**NOTE:**  
PROVIDE MIN. (2) 2 X 4 HEADER AT INTERIOR & EXTERIOR DOOR & WINDOW OPENINGS (UNLESS NOTED OTHERWISE).

**NOTE:**  
PROVIDE MIN. (1) JACK STUD & (1) KING STUD AT EACH END OF ALL HEADERS (UNLESS NOTED OTHERWISE).

**NOTE:**  
PROVIDE MIN. (1) JOIST OR LADDER FRAMING UNDER ALL UPPER FLOOR PARALLEL PARTITIONS

**NOTE:**  
PORCH CLG. FINISH PER BUILDER'S SPEC.


**NOTE:**  
S.D. (SMOKE DETECTOR) & C.O. (CARBON MONOXIDE DETECTOR) INTERCONNECTED W/ BATTERY BACK-UP PER CODE.

**NOTE:**  
DOOR & WINDOW LOCATIONS:  
ALL DOORS & WINDOWS ARE ASSUMED TO BE EITHER IN THE CENTER OF THE WALL MASS OR MIN. 4 INCHES FROM PERPENDICULAR WALL FOR CASING UNLESS NOTED OTHERWISE

**NOTE:**  
VERIFY DROPPED FLOOR AREAS FOR TILE WITH BUILDER

**FIREPLACE NOTE**  
ALL FIREPLACE DIMENSIONS & ROUGH OPENINGS TO BE VERIFIED W/ MANUFACTURER SPECS INCLUDING BUT NOT LIMITED TO WIDTH, DEPTH, HEIGHT, CHIMNEY CLEARANCES, ETC. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE ALL SPECS TO CARPENTER PRIOR TO FRAMING

**FIRE SEPARATION NOTE**  
FIRE SEPARATION (R302.5)  
GARAGE SPACE BENEATH HABITABLE ROOMS SHALL BE SEPARATED FROM ALL HABITABLE ROOMS ABOVE BY NOT LESS THAN 5/8-INCH TYPE X GYPSUM BOARD OR EQUIVALENT. WHERE THE SEPARATION IS A FLOOR-CEILING ASSEMBLY, THE STRUCTURE SUPPORTING THE SEPARATION SHALL ALSO BE PROTECTED BY NOT LESS THAN 1/2-INCH GYPSUM BOARD OR EQUIVALENT. ALL OTHER GARAGE SPACE SHALL BE SEPARATED FROM THE RESIDENCE AND ITS ATTIC AREA BY NOT LESS THAN 1/2-INCH GYPSUM BOARD APPLIED TO THE GARAGE SIDE. DROP CLG. UNDER FLR. ABV. (ENCLOSE MECHANICAL AND STRUCTURAL ELEMENTS) VERIFY W/ BLDG.

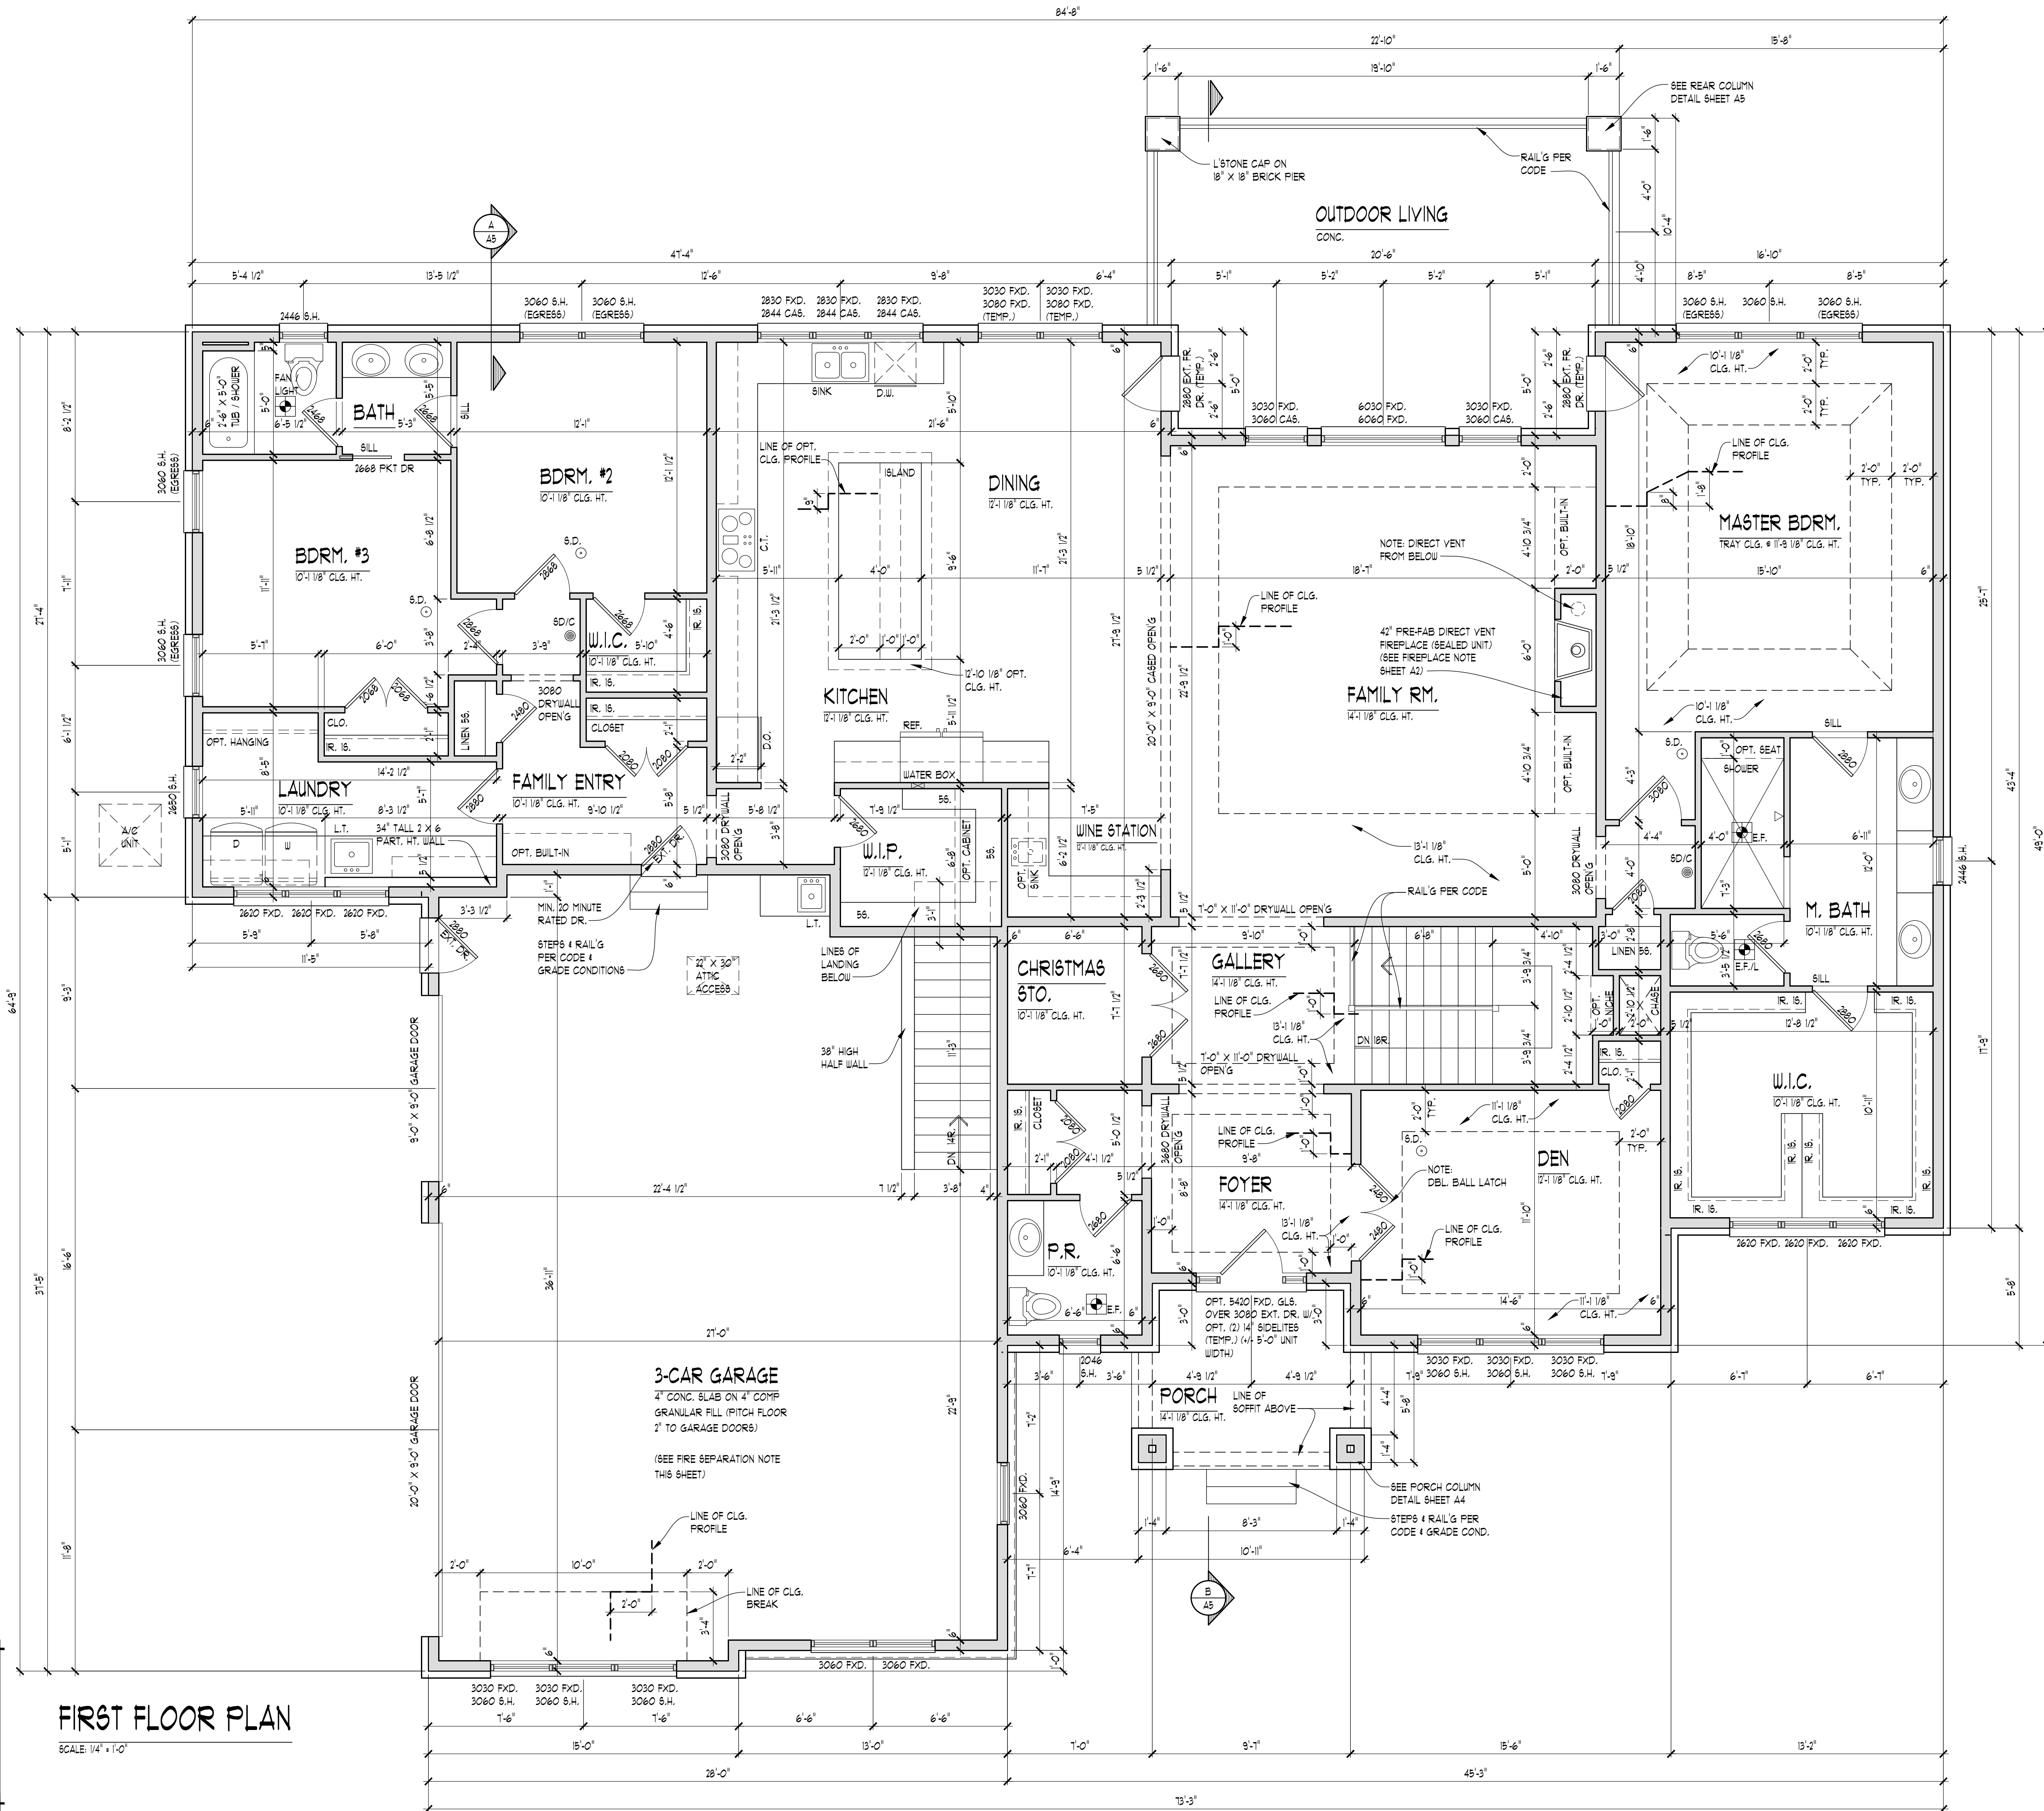

**FIRST FLOOR PLAN**


SCALE: 1/4" = 1'-0"

**AREA SUMMARY:**

HABITABLE SPACE AREA:	
FIRST FLOOR	1785 S.F.
LOWER LEVEL	1550 S.F.
TOTAL AREA	3335 S.F.

**AREA SUMMARY:**

OVERALL FLOOR AREA:	
FIRST FLOOR	3111 S.F.
TOTAL AREA	3111 S.F.

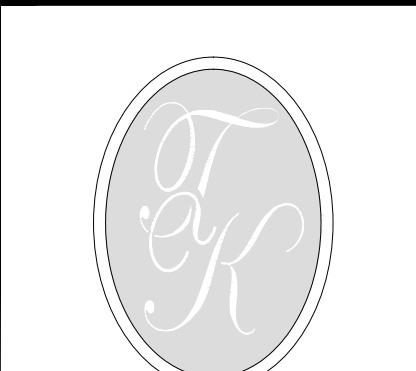

**TK DESIGN & ASSOCIATES**

WWW.TKHOMEDESIGN.COM  
26030 PONTIAC TRAIL, SOUTH LYON, MI 48178  
PHONE: (248)-446-1960  
FAX: (248)-446-1961


COPYRIGHT 2017 TK DESIGN AND ASSOCIATES  
DO NOT SCALE DRAWING. USE CALCULATED DIMENSIONS ONLY.  
CONTRACTOR TO VERIFY ALL DRAWING ASPECTS BEFORE CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE REPORTED TO THE DESIGNER IN WRITING IMMEDIATELY.  
CALL MTD OR AT 800-482-2721 3 DAYS PRIOR TO ANY EXCAVATION. CONTRACTOR IS THE SOLE RESPONSIBILITY OF THE PERMITS HOLDER.

**CLIENT / PROJECT**  
COMPO BUILDERS  
MILLEN RESIDENCE  
MONTEBELLO CRT  
LOT 21  
NOVI, MI


<b>JOB No.</b>	20-139
<b>DRAWN:</b>	AG
<b>CHECKED:</b>	BF
<b>REVIEW:</b>	5-1-2020
<b>FINAL:</b>	6-15-2020
<b>REVISED</b>	6-25-2020
<b>REVISED</b>	7-14-2020
<b>REVISED</b>	7-30-2020

**SCALE:**  
PER PLAN

**SHEET #**  
A-2

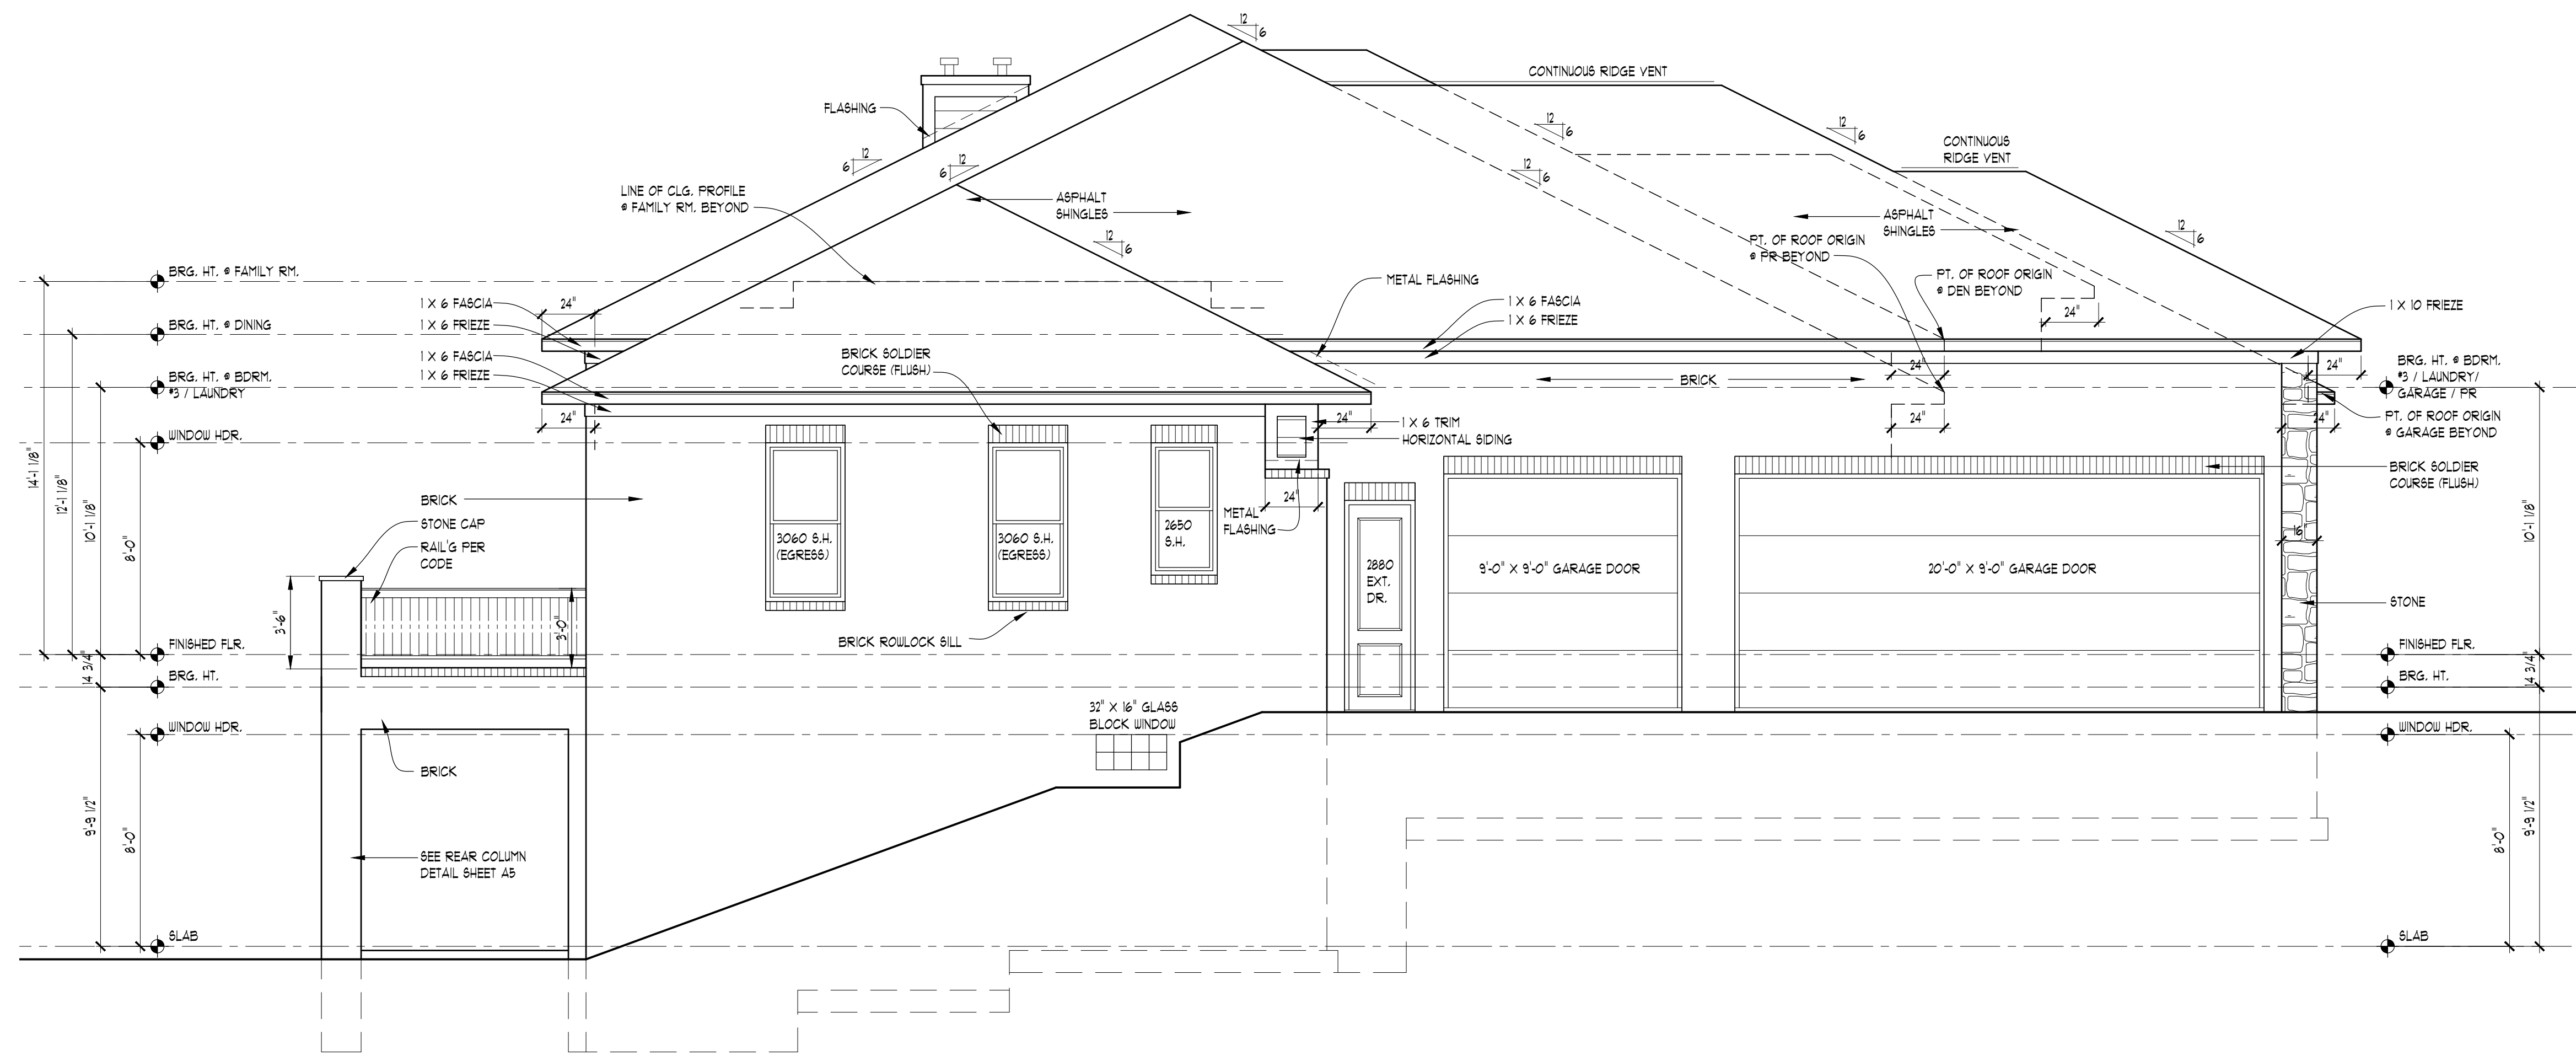

**LEFT ELEVATION**  
SCALE: 1/4" = 1'-0"

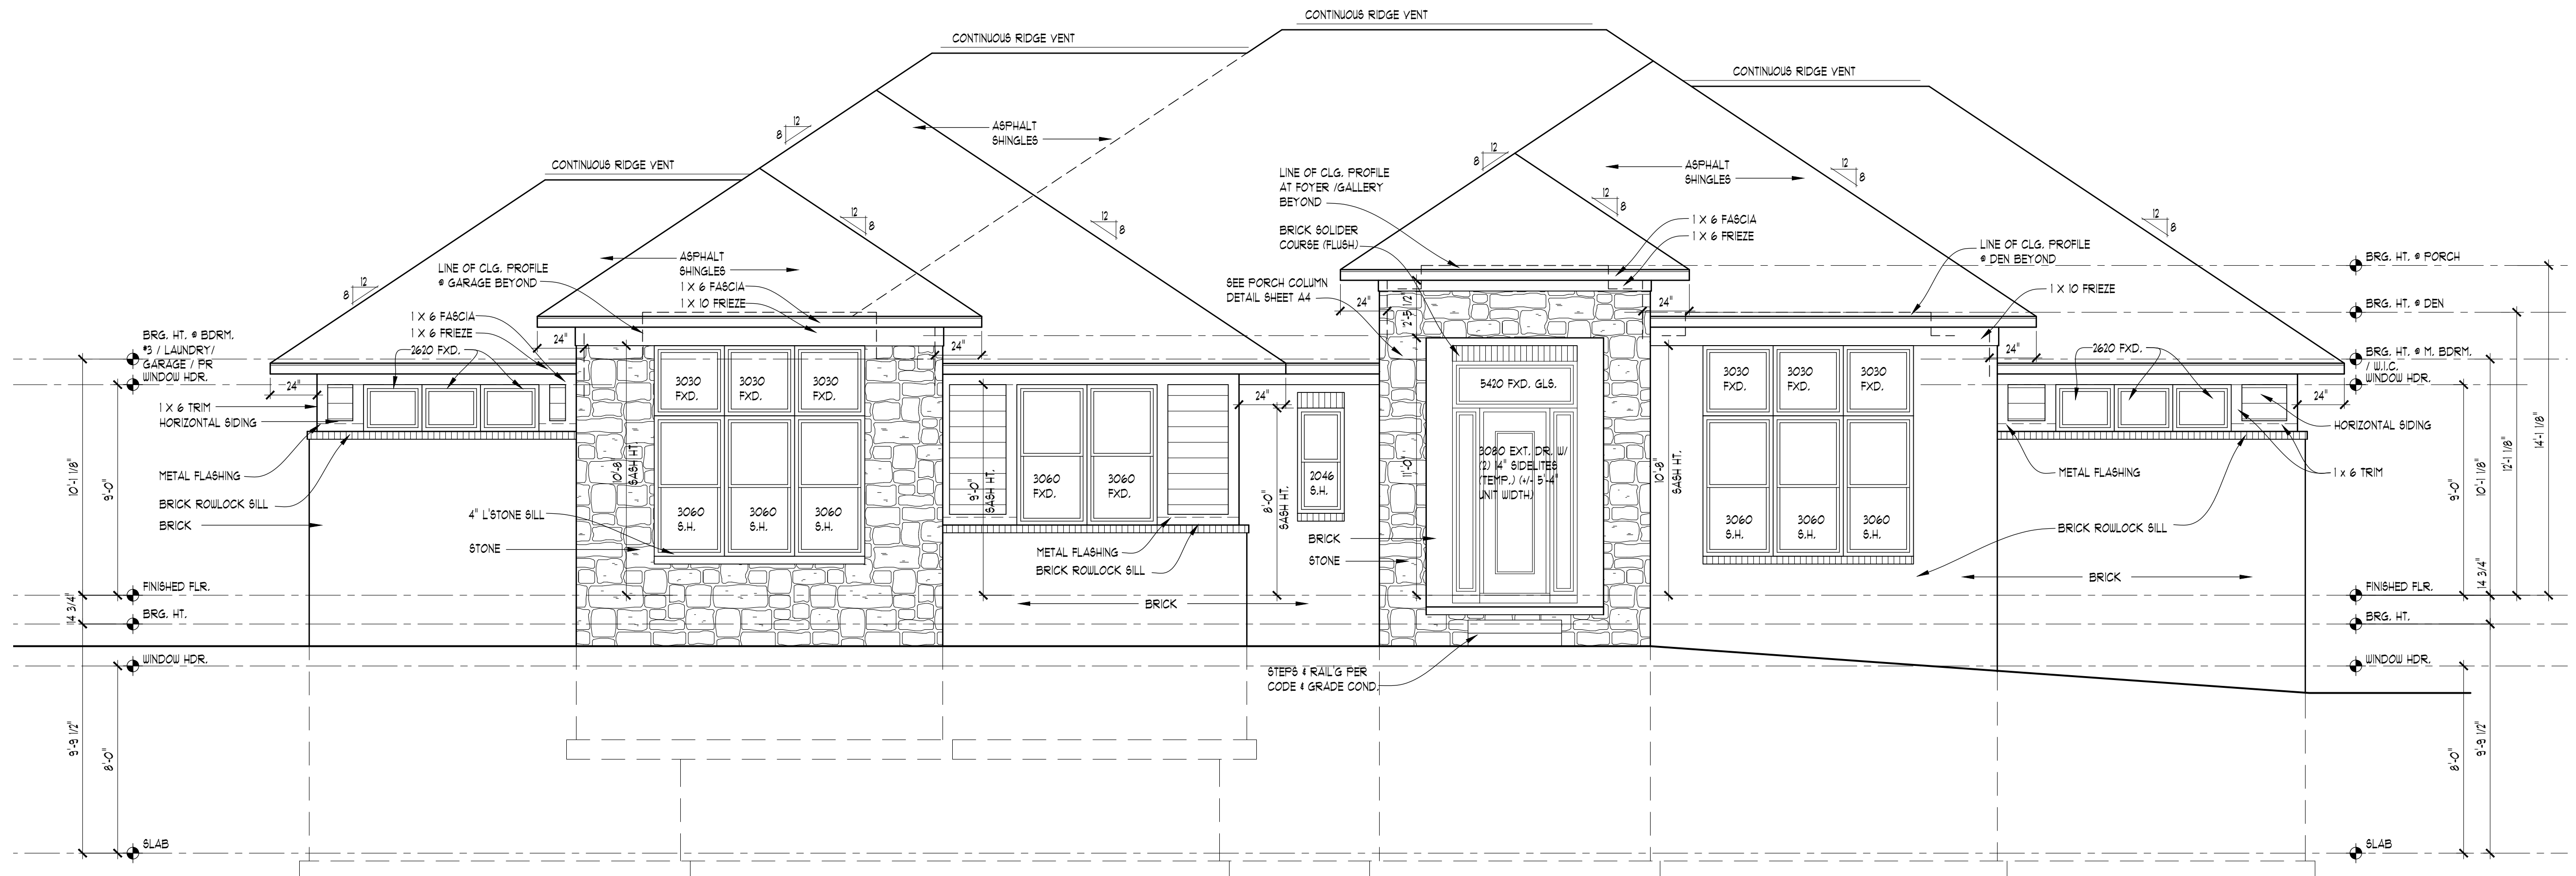

**FRONT ELEVATION**  
SCALE: 1/4" = 1'-0"

**ELEVATION NOTES**

- ALL ROOF SADDLES TO BE O.S.B. SHEATHED WITH ICE & WATER SHIELD AND SHINGLES.
- PROVIDE ICE & WATER SHIELD MIN. 6'-0" COVERAGE AT ALL VALLEYS
- FIREPLACE FLUE TO BE DETERMINED PER MANUFACTURER'S SPECIFICATION
- METAL FLASHING AS REQUIRED BY CODE.
- ROOF & SOFFIT VENTS AS REQUIRED BY CODE.
- PROVIDE GUTTERS & DOWNSPOUTS FOR DRAINAGE OF ROOF WATER. DOWNSPOUTS ARE TO BE LOCATED SO THAT THE DISCHARGE WILL NOT SPILL ON OR FLOW ACROSS ANY PORCHES, WALKS OR DRIVES.
- CARPENTER TO VERIFY THICKNESS OF MASONRY PRIOR TO BUILDING BRICK RACK

**NOTE:**  
OVERHANG DIMENSIONS (O.H.) ARE FROM SHEATHING U.N.C.


**TYPICAL WINDOW DESIGNATION**

**NOTE:**  
GENERAL REFERENCE FOR ROUGH OPENING SIZES ONLY. CONSULT WITH WINDOW MANUFACTURER FOR EXACT WINDOW SIZES & REQUIREMENTS.

**NOTE:**  
ALL CASEMENT VENTING TO BE VERIFIED W/ BUILDER/ HOMEOWNER PRIOR TO ORDERING WINDOWS

**NOTE:**  
WINDOW MANUFACTURER TO VERIFY ALL WINDOW GRID PATTERNS WITH HOME OWNER.

**NOTE:**  
ALL WINDOW SILLS OVER 6'-0" ABOVE EXTERIOR GRADE OR SURFACE BELOW TO BE MINIMUM 24" ABOVE FINISHED FLOOR OR HAVE BASH LIMITERS PER CODE REQUIREMENTS

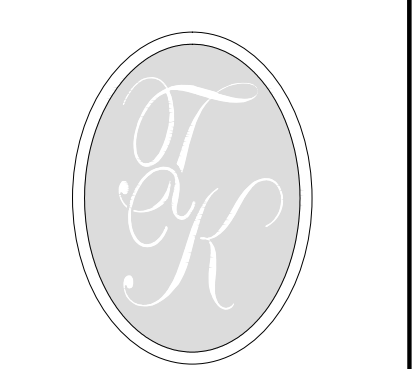

**TK DESIGN & ASSOCIATES**

WWW.TKHOMEDESIGN.COM  
26030 PONTIAC TRAIL, SOUTH LYONS, MI 48178  
PHONE: (248)-446-1960  
FAX: (248)-446-1961

COPYRIGHT 2017 TK DESIGN AND ASSOCIATES  
DO NOT SCALE DRAWINGS. USE CALCULATED DIMENSIONS ONLY. CONSULTOR TO FIELD VERIFY ALL DRAWING ASPECTS BEFORE CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE REPORTED TO THE DESIGNER IN WRITING IMMEDIATELY. CALL MKS/DG AT 800-482-7271 3 DAYS PRIOR TO ANY EXCAVATION. CONSTRUCTION IS THE SOLE RESPONSIBILITY OF THE PERMIT HOLDER.


**CLIENT / PROJECT**  
**COMPO BUILDERS RESIDENCE**  
**MILLEN RESIDENCE**  
**MONTEBELLO CRT**  
**LOT 21**  
**NOVI, MI**

**JOB No.:** 20-139  
**DRAWN:** AG  
**CHECKED:** BF  
**REVIEW:** 5-1-2020  
**FINAL:** 6-15-2020  
**REVISED:** 6-25-2020  
**REVISED:** 7-14-2020  
**REVISED:** 7-30-2020

**SCALE:**  
PER PLAN

**SHEET #**  
**A-3**



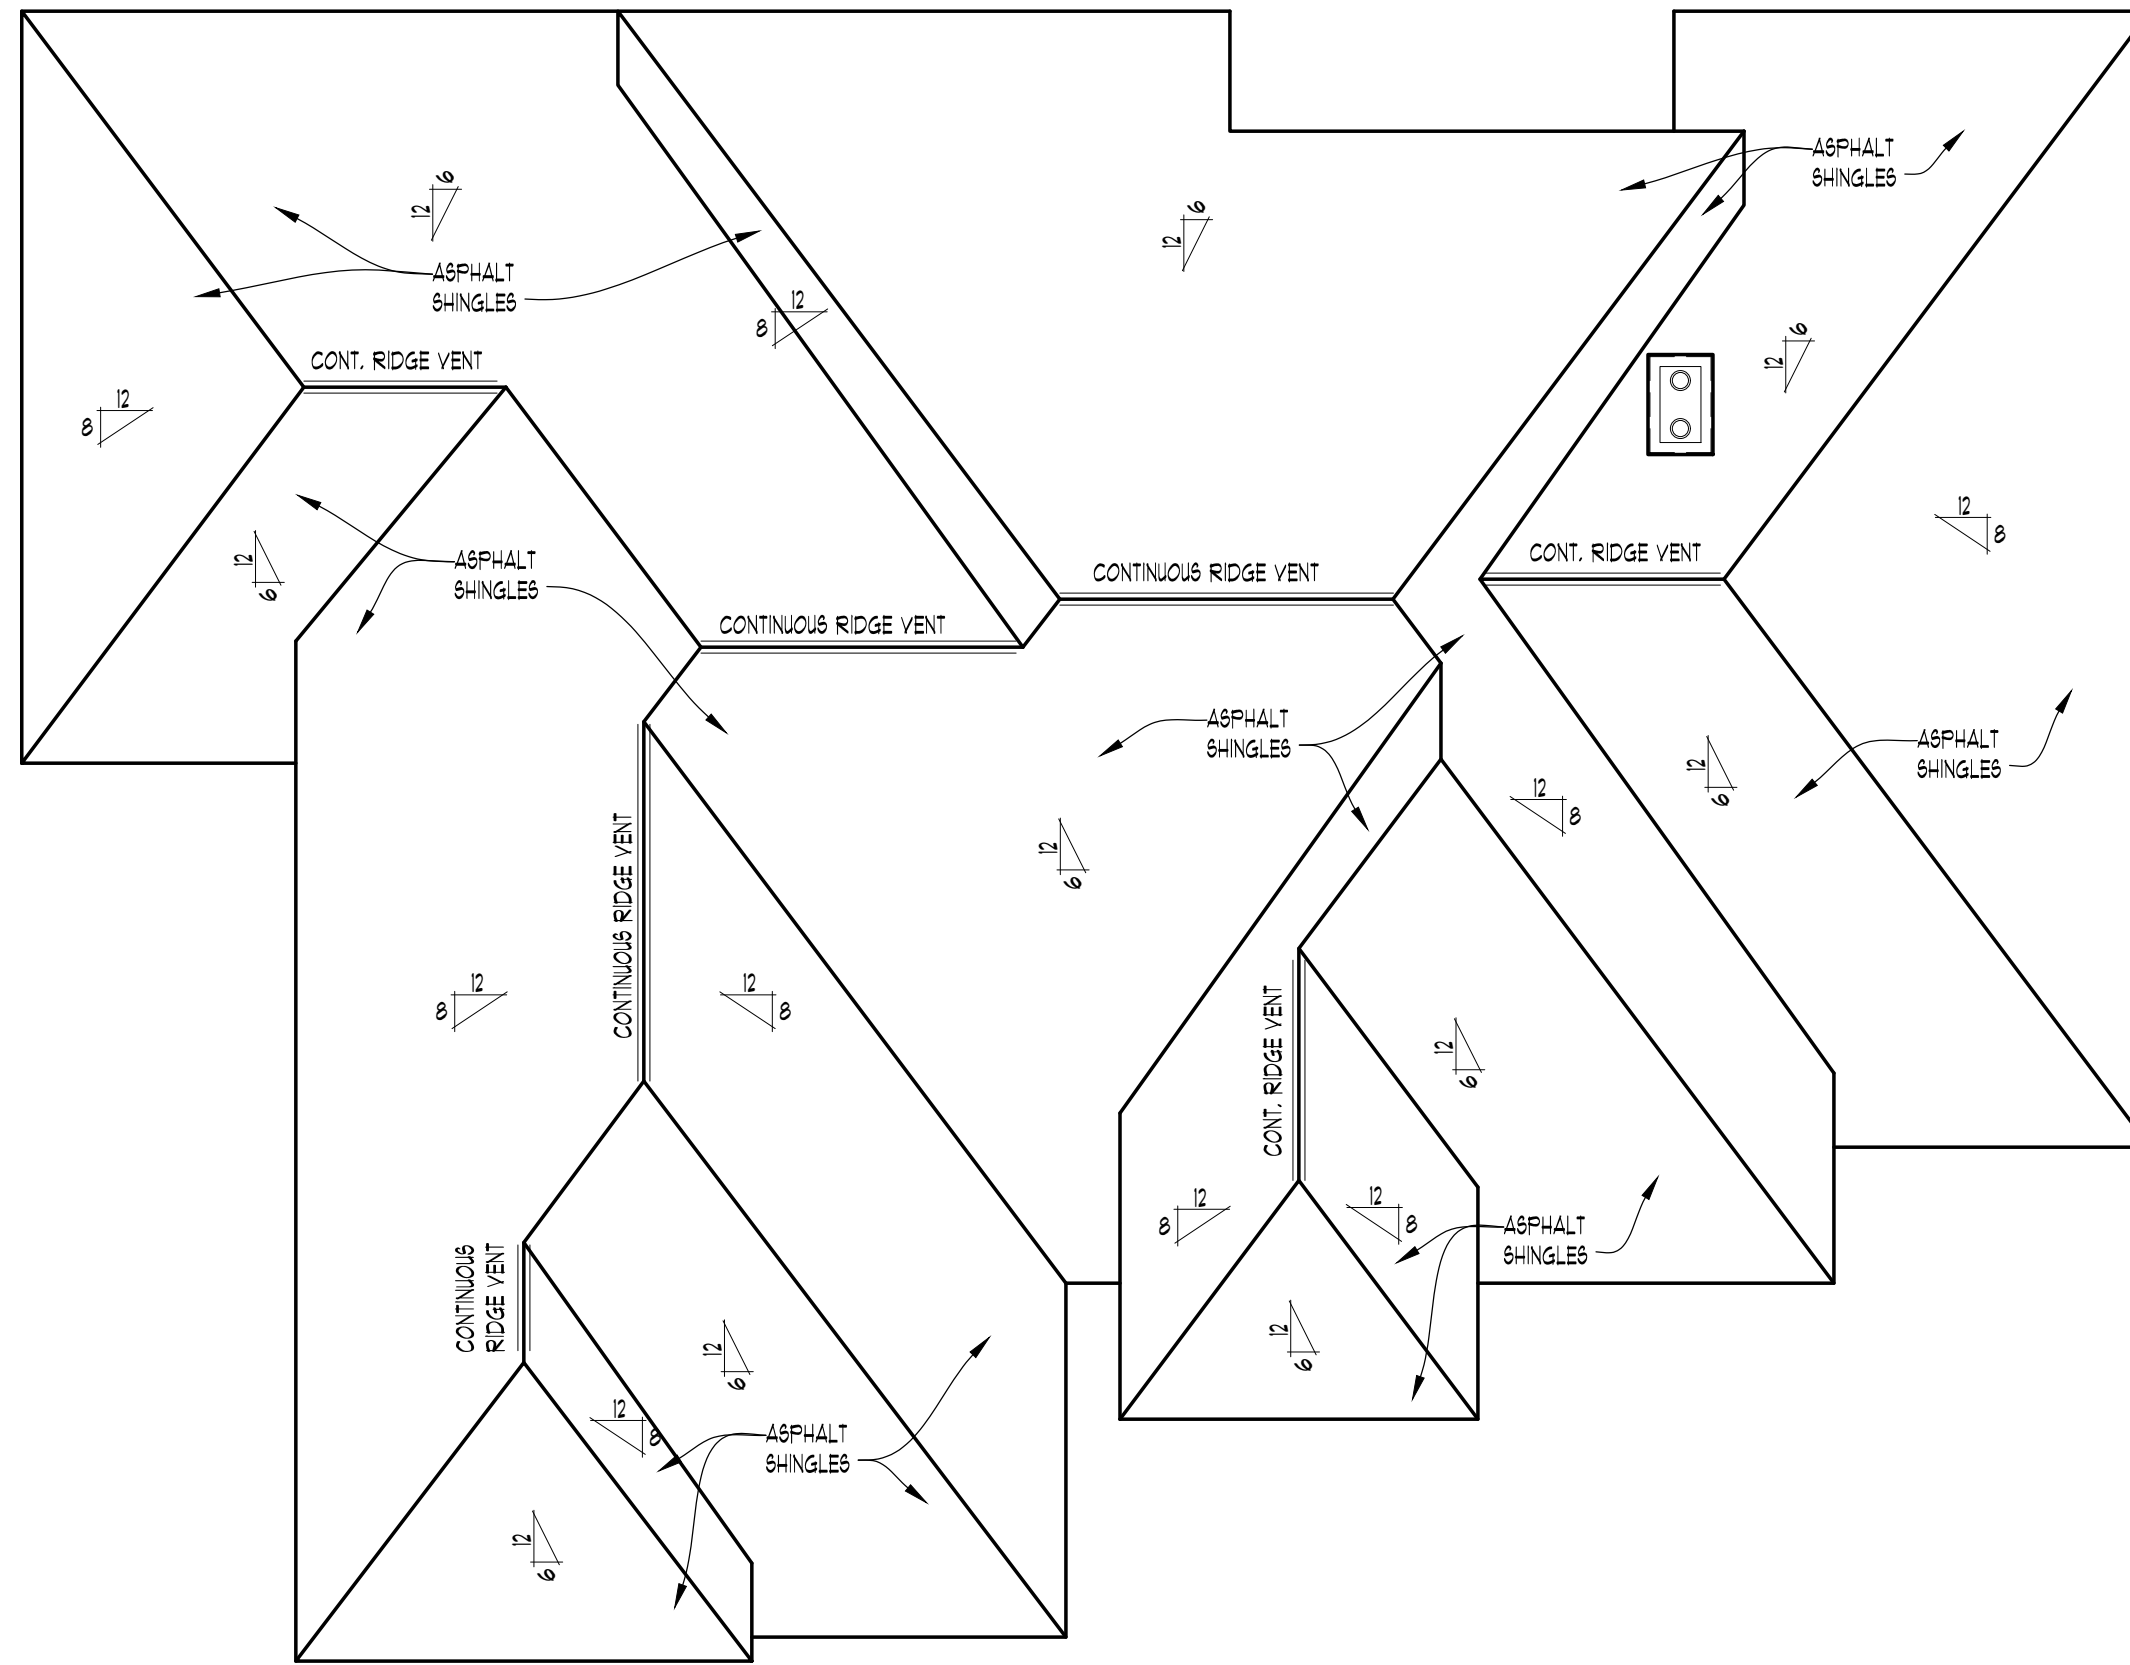


**ROOF PLAN**

SCALE: 1/8" = 1'-0"

**ATTIC VENTILATION CALCULATIONS:**


AREA OF ATTIC OVER HEATED SPACE = 3066 SQ. FT.  
 3066/150 = 20.44 (SQ. FT. REQ'D)  
 20.44' x 144" = 2944" (SQ. INCH CONVERSION)  
 RIDGE VENTING:  
 2944" x 0.45" = 1325" (SQ. INCHES REQ'D)  
 1325' / 18" = 74" (LINEAR FT. OF RIDGE VENT REQ'D)  
 EAVE OR CORNICE VENTING:  
 2944" x 0.35" = 1030" (SQ. INCHES REQ'D)

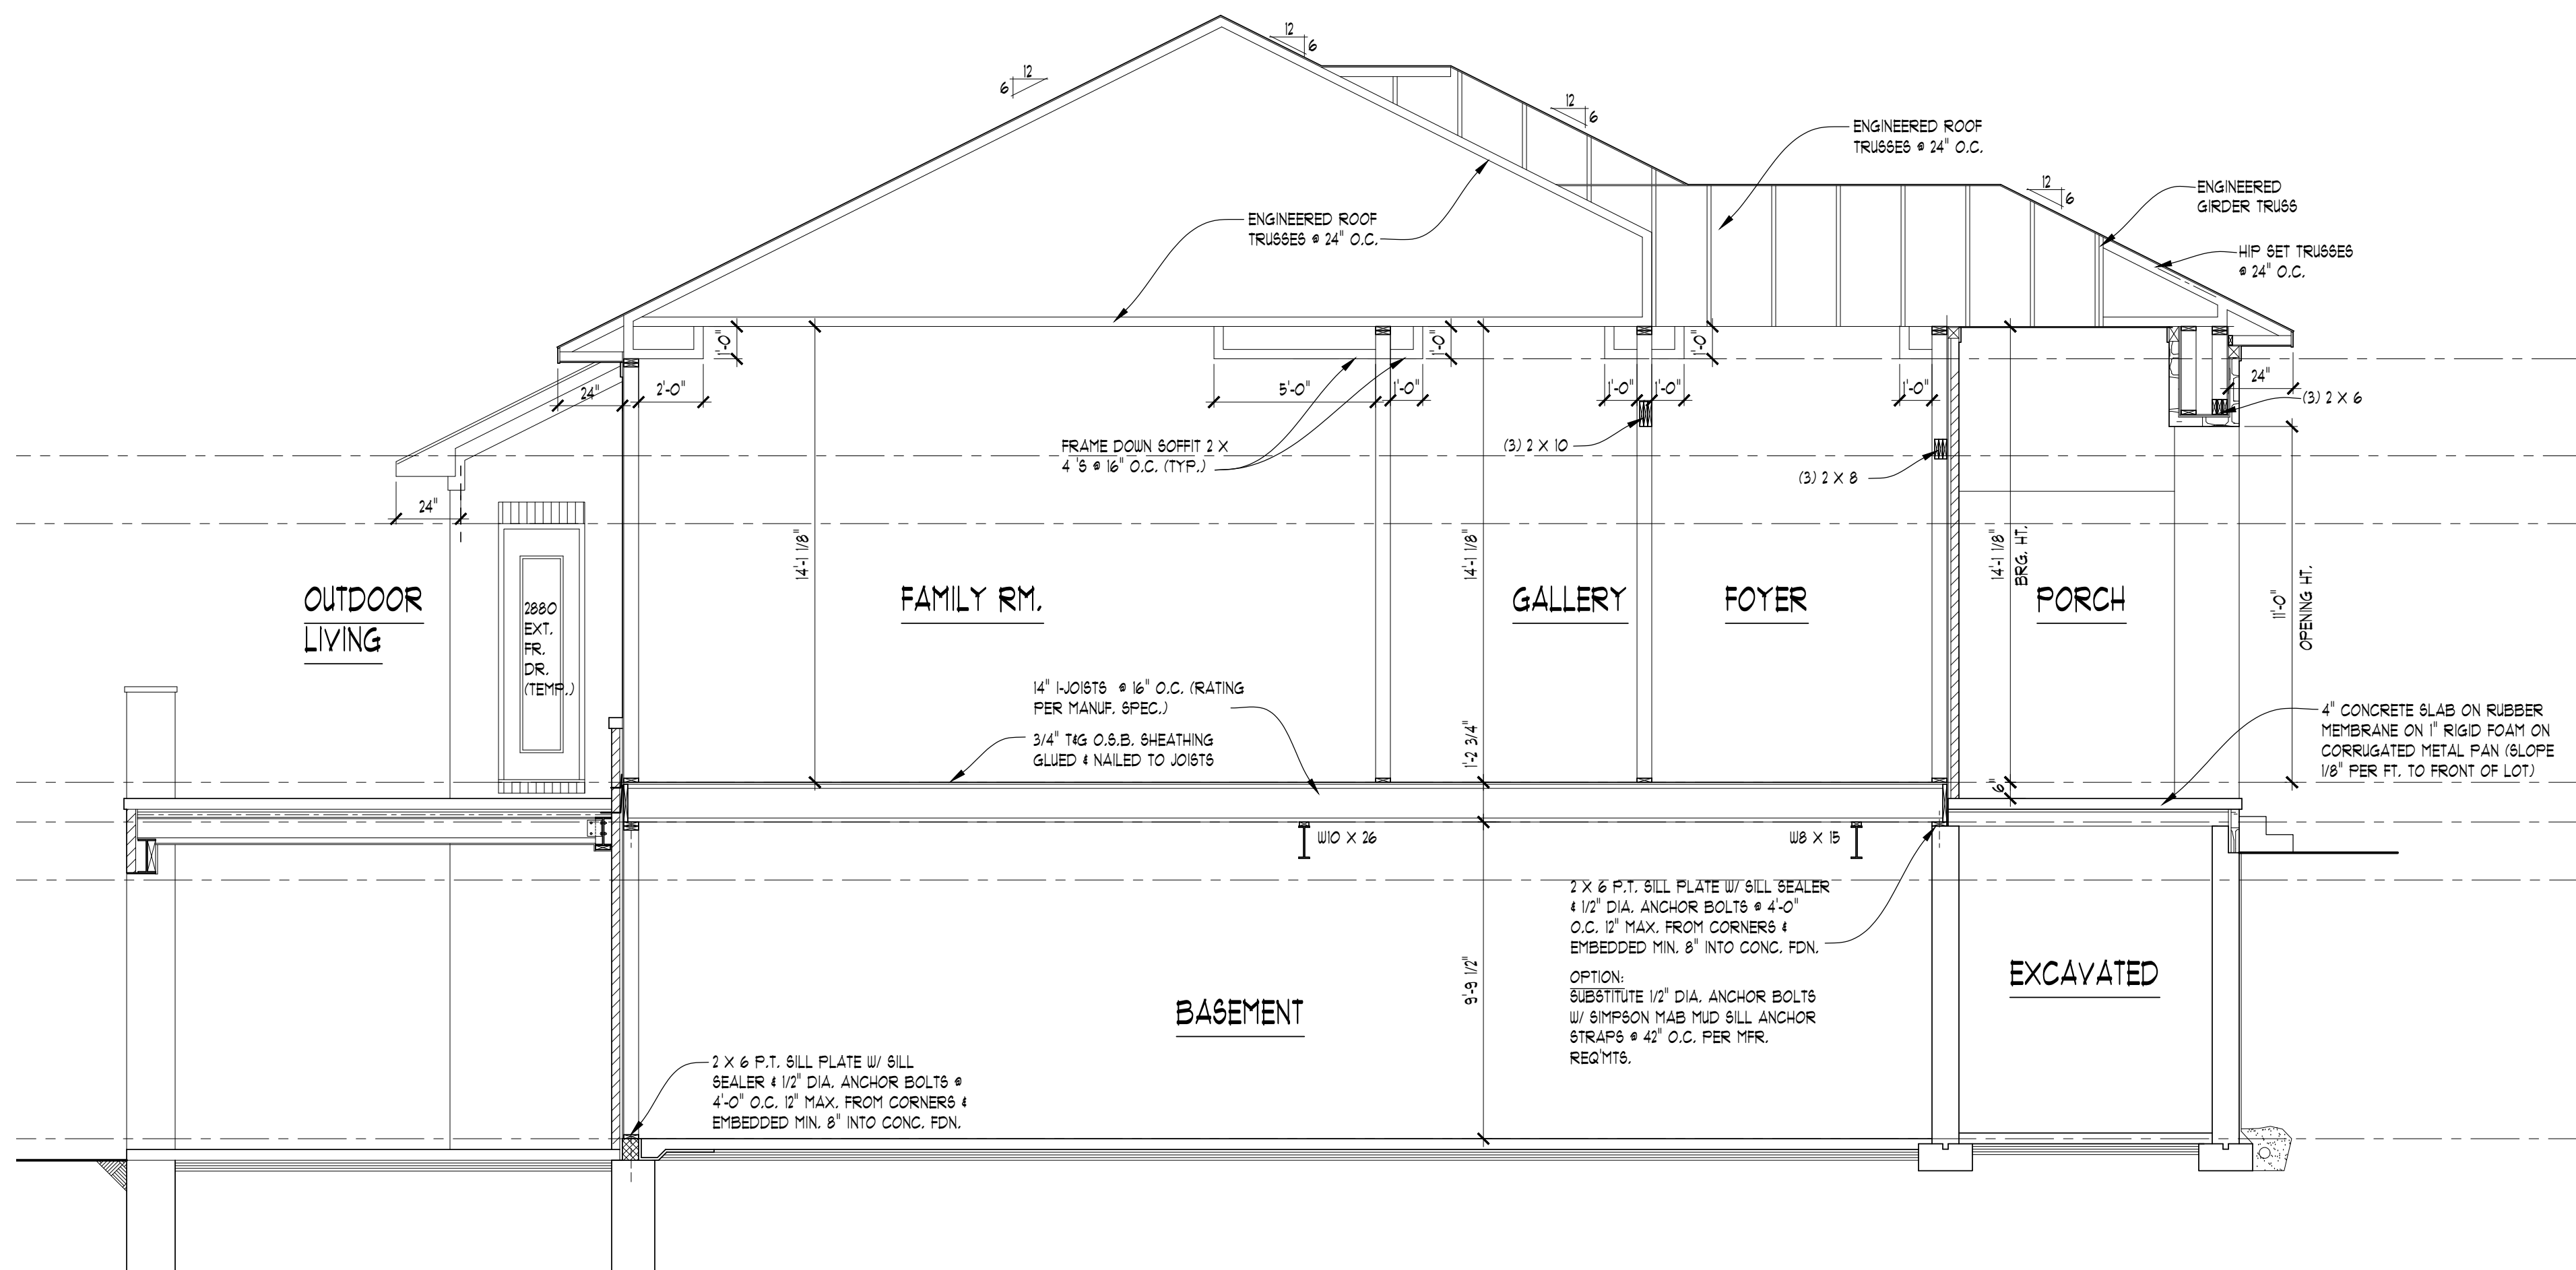

**BUILDING SECTION**

SCALE: 1/4" = 1'-0"

B  
A1-A2

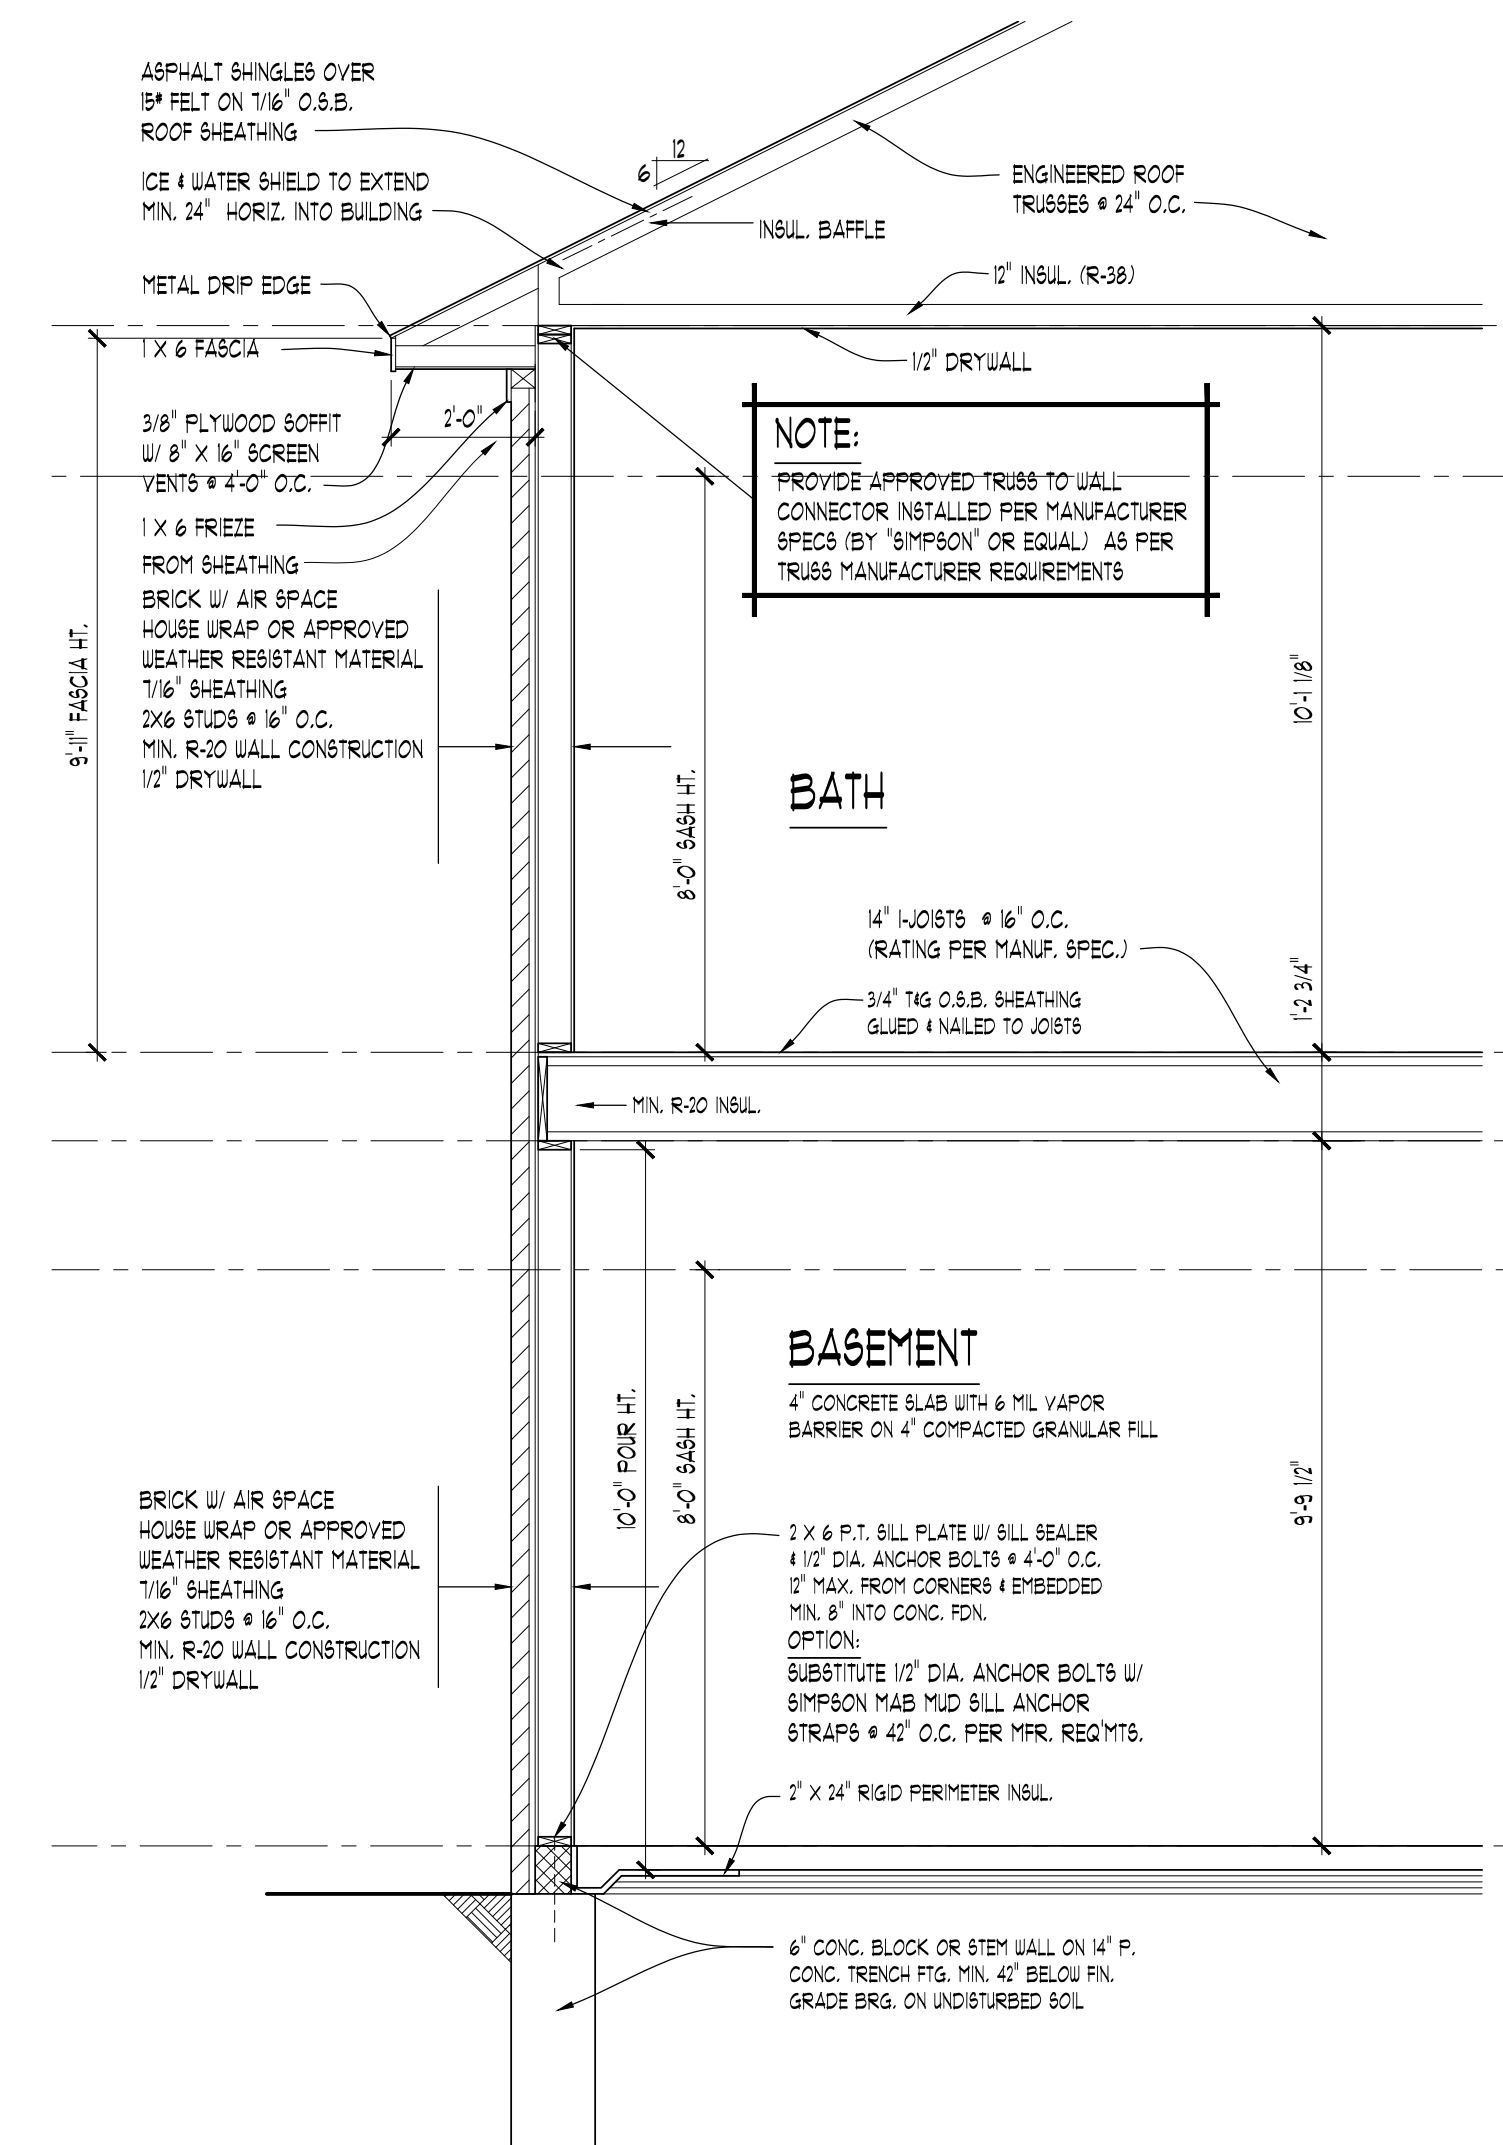

**WALL SECTION**

SCALE: 3/8" = 1'-0"

A  
A1-A2



**TK DESIGN & ASSOCIATES**

WWW.TKHOMEDESIGN.COM

26030 PONTIAC TRAIL,  
 SOUTH LYON, MI 48178  
 PHONE: (248)-446-1960  
 FAX: (248)-446-1961

COPYRIGHT 2017 TK DESIGN AND ASSOCIATES  
 DO NOT SCALE DRAWINGS. USE CALCULATED DIMENSIONS ONLY.  
 CONTRACTOR TO FIELD VERIFY ALL DRAWING DETAILS BEFORE  
 CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE  
 REPORTED TO THE DESIGNER IN WRITING IMMEDIATELY.  
 CALL MKS DCA AT 580-482-7271 3 DAYS PRIOR TO ANY EXCAVATION  
 CONSTRUCTION & BE THE SOLE RESPONSIBILITY OF THE PROFESSIONAL

**CLIENT / PROJECT**  
**COMPO BUILDERS**  
**MILLEN RESIDENCE**  
**MONTEBELLO CRT**  
 LOT 21  
 NOVI, MI

**JOB No.** 20-139  
**DRAWN:** AG  
**CHECKED:** BF  
**REVIEW:** 5-1-2020  
**FINAL:** 6-15-2020  
**REVISED:** 6-25-2020  
**REVISED:** 7-14-2020  
**REVISED:** 7-30-2020

**SCALE:**  
**PER PLAN**

**SHEET #**  
**A-5**



**NOTE:**  
 PROVIDE MIN. (2) 2 X 4 HEADER AT ALL INTERIOR & EXTERIOR DOOR & WINDOW OPENINGS (UNLESS NOTED OTHERWISE).

**NOTE:**  
 PROVIDE MIN. (1) JACK STUD & (1) KING STUD AT EACH END OF ALL HEADERS (UNLESS NOTED OTHERWISE).

**NOTE:**  
 PROVIDE MIN. (1) JOIST OR LADDER FRAMING UNDER ALL UPPER FLOOR PARALLEL PARTITIONS

**NOTE:**  
 GROUT ALL CONCRETE BLOCK CORES SOLID THAT SUPPORT POINT LOADS FROM ABOVE (TYPICAL)

**NOTE:**  
 WOOD BEAM  
 STEEL BEAM  
 BRG. WALL  
 BRG. WALL ABOVE  
 BRG. WALL & BRG. WALL ABOVE  
 POINT LOAD  
 POINT LOAD FROM ABOVE

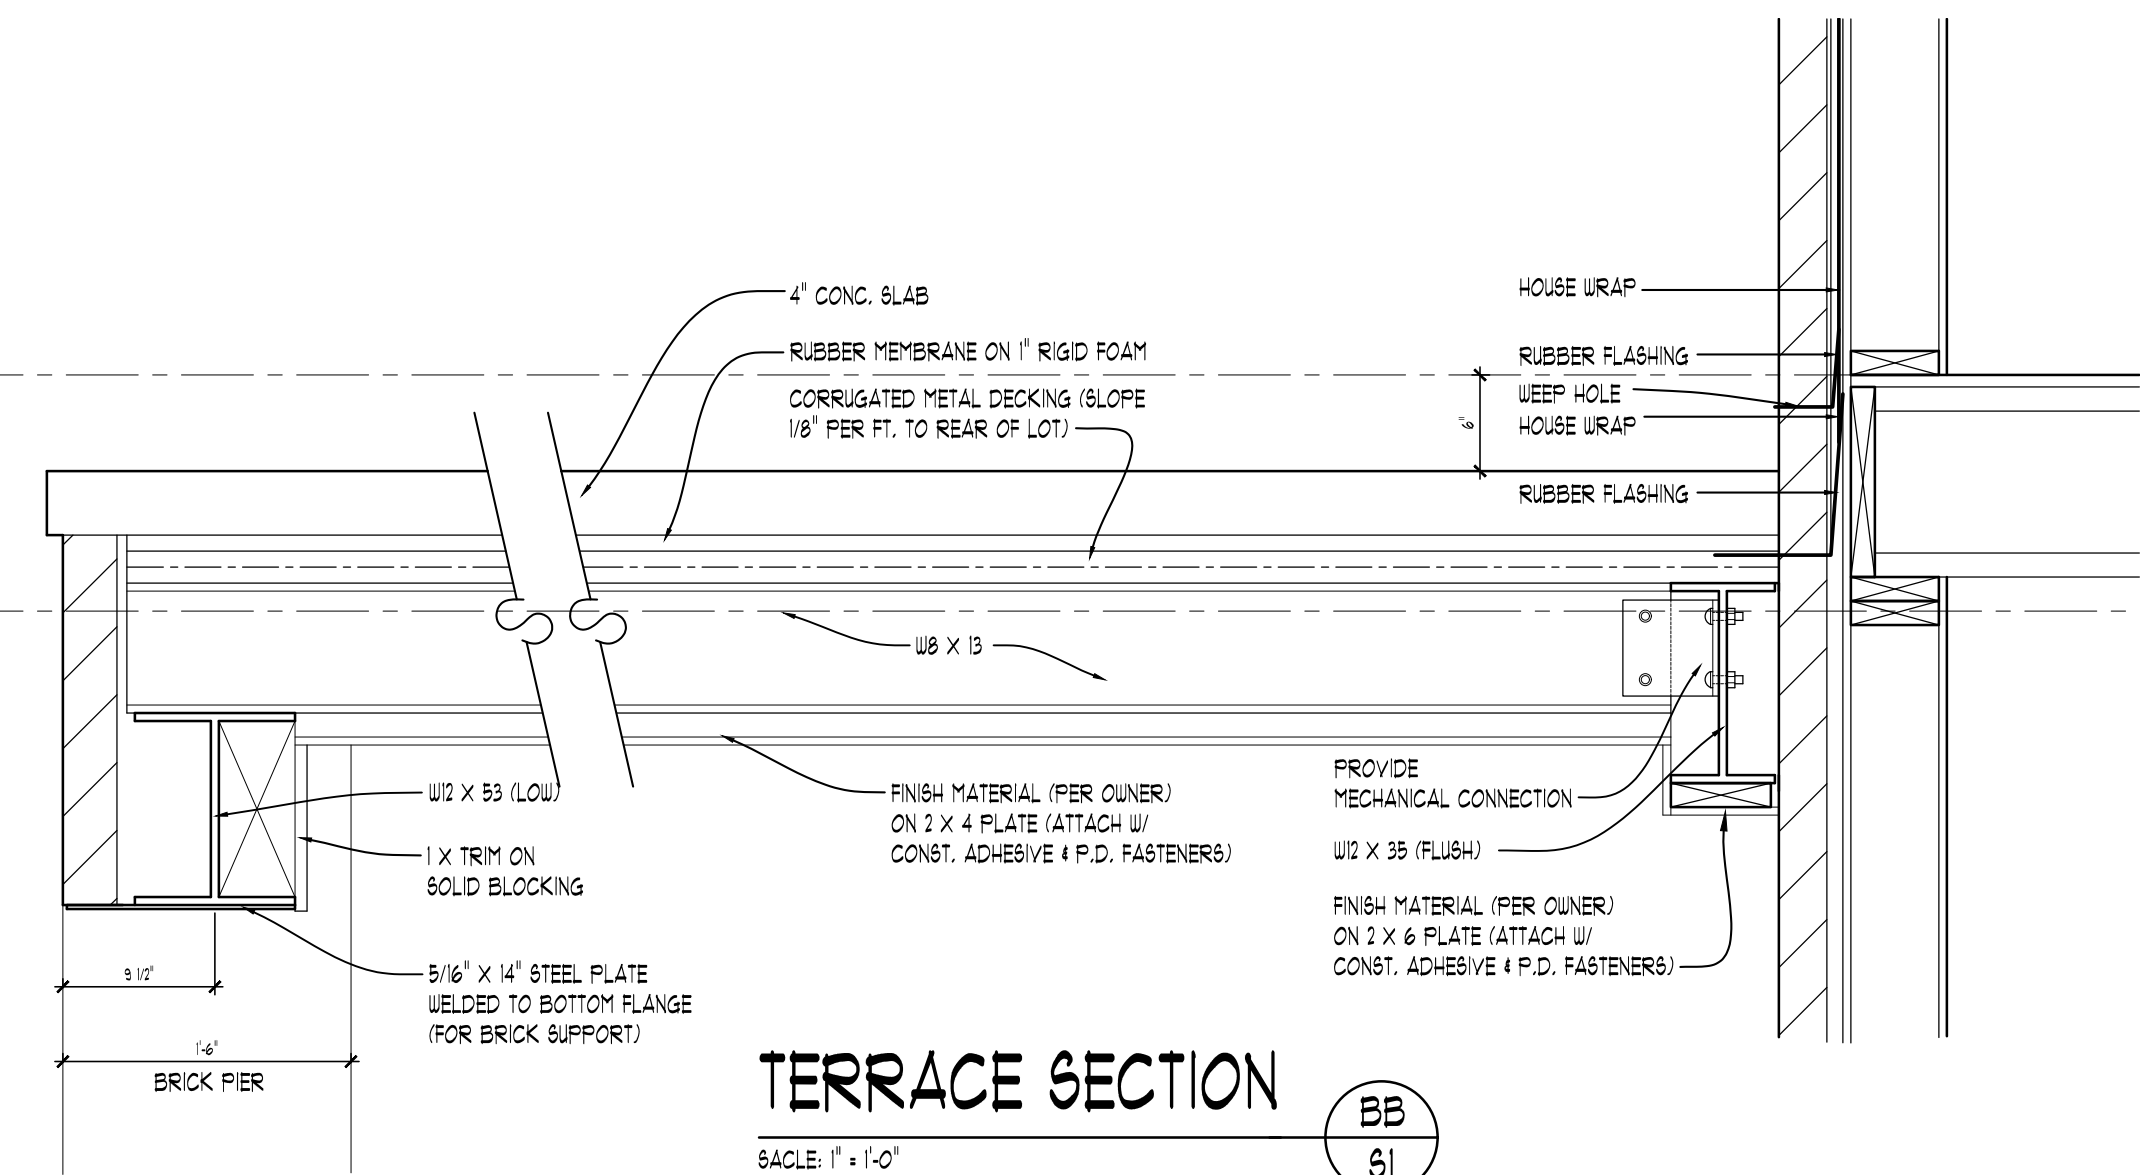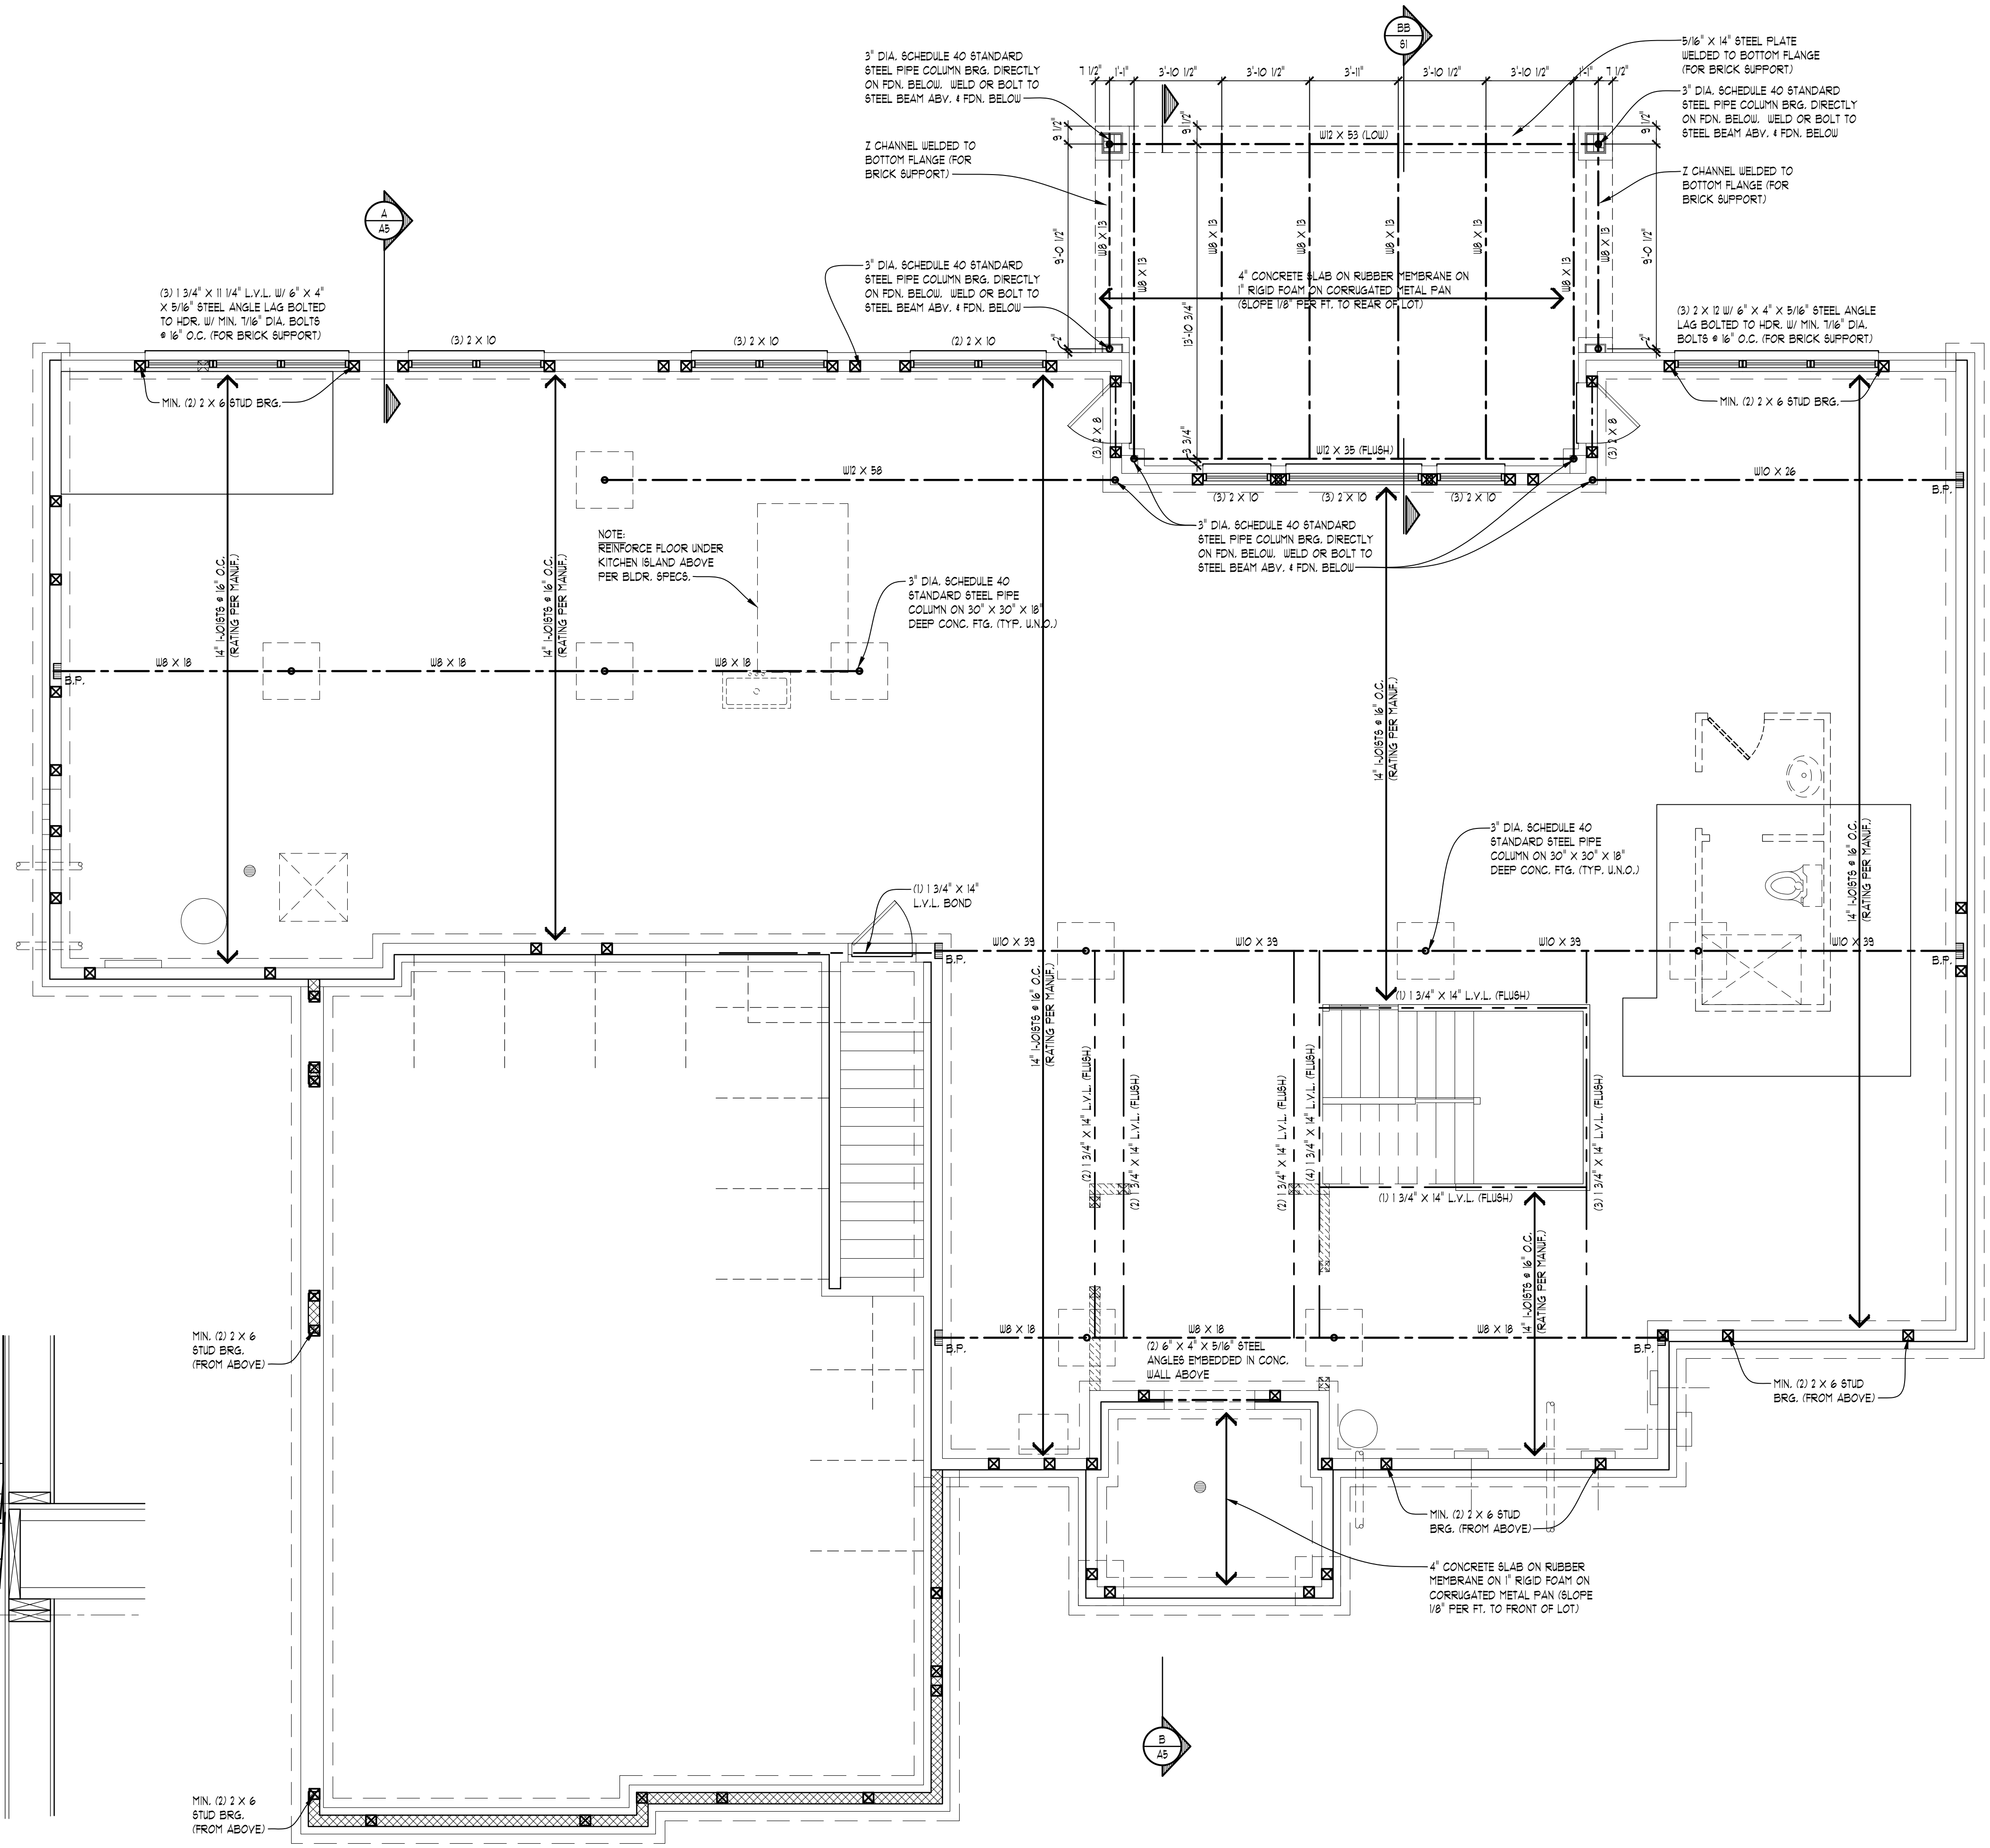

**FOUNDATION PLAN STRUCTURE**  
 SCALE: 1/4" = 1'-0"

**TK DESIGN & ASSOCIATES**  
 WWW.TKHOMEDESIGN.COM  
 26030 PONTIAC TRAIL, SOUTH LYON, MI 48178  
 PHONE: (248)-446-1960  
 FAX: (248)-446-1961

COPYRIGHT 2014 TK DESIGN AND ASSOCIATES  
 FOR NEUTRAL DRAWINGS, USE CALCULATED DIMENSIONS ONLY  
 CONTRACTOR TO FIELD VERIFY ALL DRAWING ASPECTS BEFORE  
 CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE  
 REPORTED TO THE DESIGNER IN WRITING IMMEDIATELY.  
 CALL MTDI DO AT 800-482-7271 3 DAYS PRIOR TO ANY EXCAVATION  
 CONSTRUCTION'S SOLE RESPONSIBILITY OF THE PERMITS/HOLDER

**CLIENT / PROJECT**  
 COMPO BUILDERS  
 MILLEN RESIDENCE  
 MONTEBELLO CRT  
 LOT 21  
 NOVI, MI

**JOB No.** 20-139  
**DRAWN:** AG  
**CHECKED:** BF  
**REVIEW:** 5-1-2020  
**FINAL:** 6-15-2020  
**REVISED:** 6-25-2020  
**REVISED:** 7-14-2020  
**REVISED:** 7-30-2020

**SCALE:**  
 PER PLAN

**SHEET #**  
 S1


**NOTE:**  
 PROVIDE MIN. (2) 2 X 4 HEADER AT ALL INTERIOR & EXTERIOR DOOR & WINDOW OPENINGS (UNLESS NOTED OTHERWISE).

**NOTE:**  
 PROVIDE MIN. (1) JACK STUD & (1) KING STUD AT EACH END OF ALL HEADERS (UNLESS NOTED OTHERWISE).

**NOTE:**  
 PROVIDE MIN. (1) JOIST OR LADDER FRAMING UNDER ALL UPPER FLOOR PARALLEL PARTITIONS


**NOTE:**  
 GROUT ALL CONCRETE BLOCK CORES SOLID THAT SUPPORT POINT LOADS FROM ABOVE (TYPICAL)

**NOTE:**  
 WOOD BEAM  
 STEEL BEAM  
 BRG. WALL  
 BRG. WALL ABOVE  
 BRG. WALL & BRG. WALL ABOVE  
 POINT LOAD  
 POINT LOAD FROM ABOVE

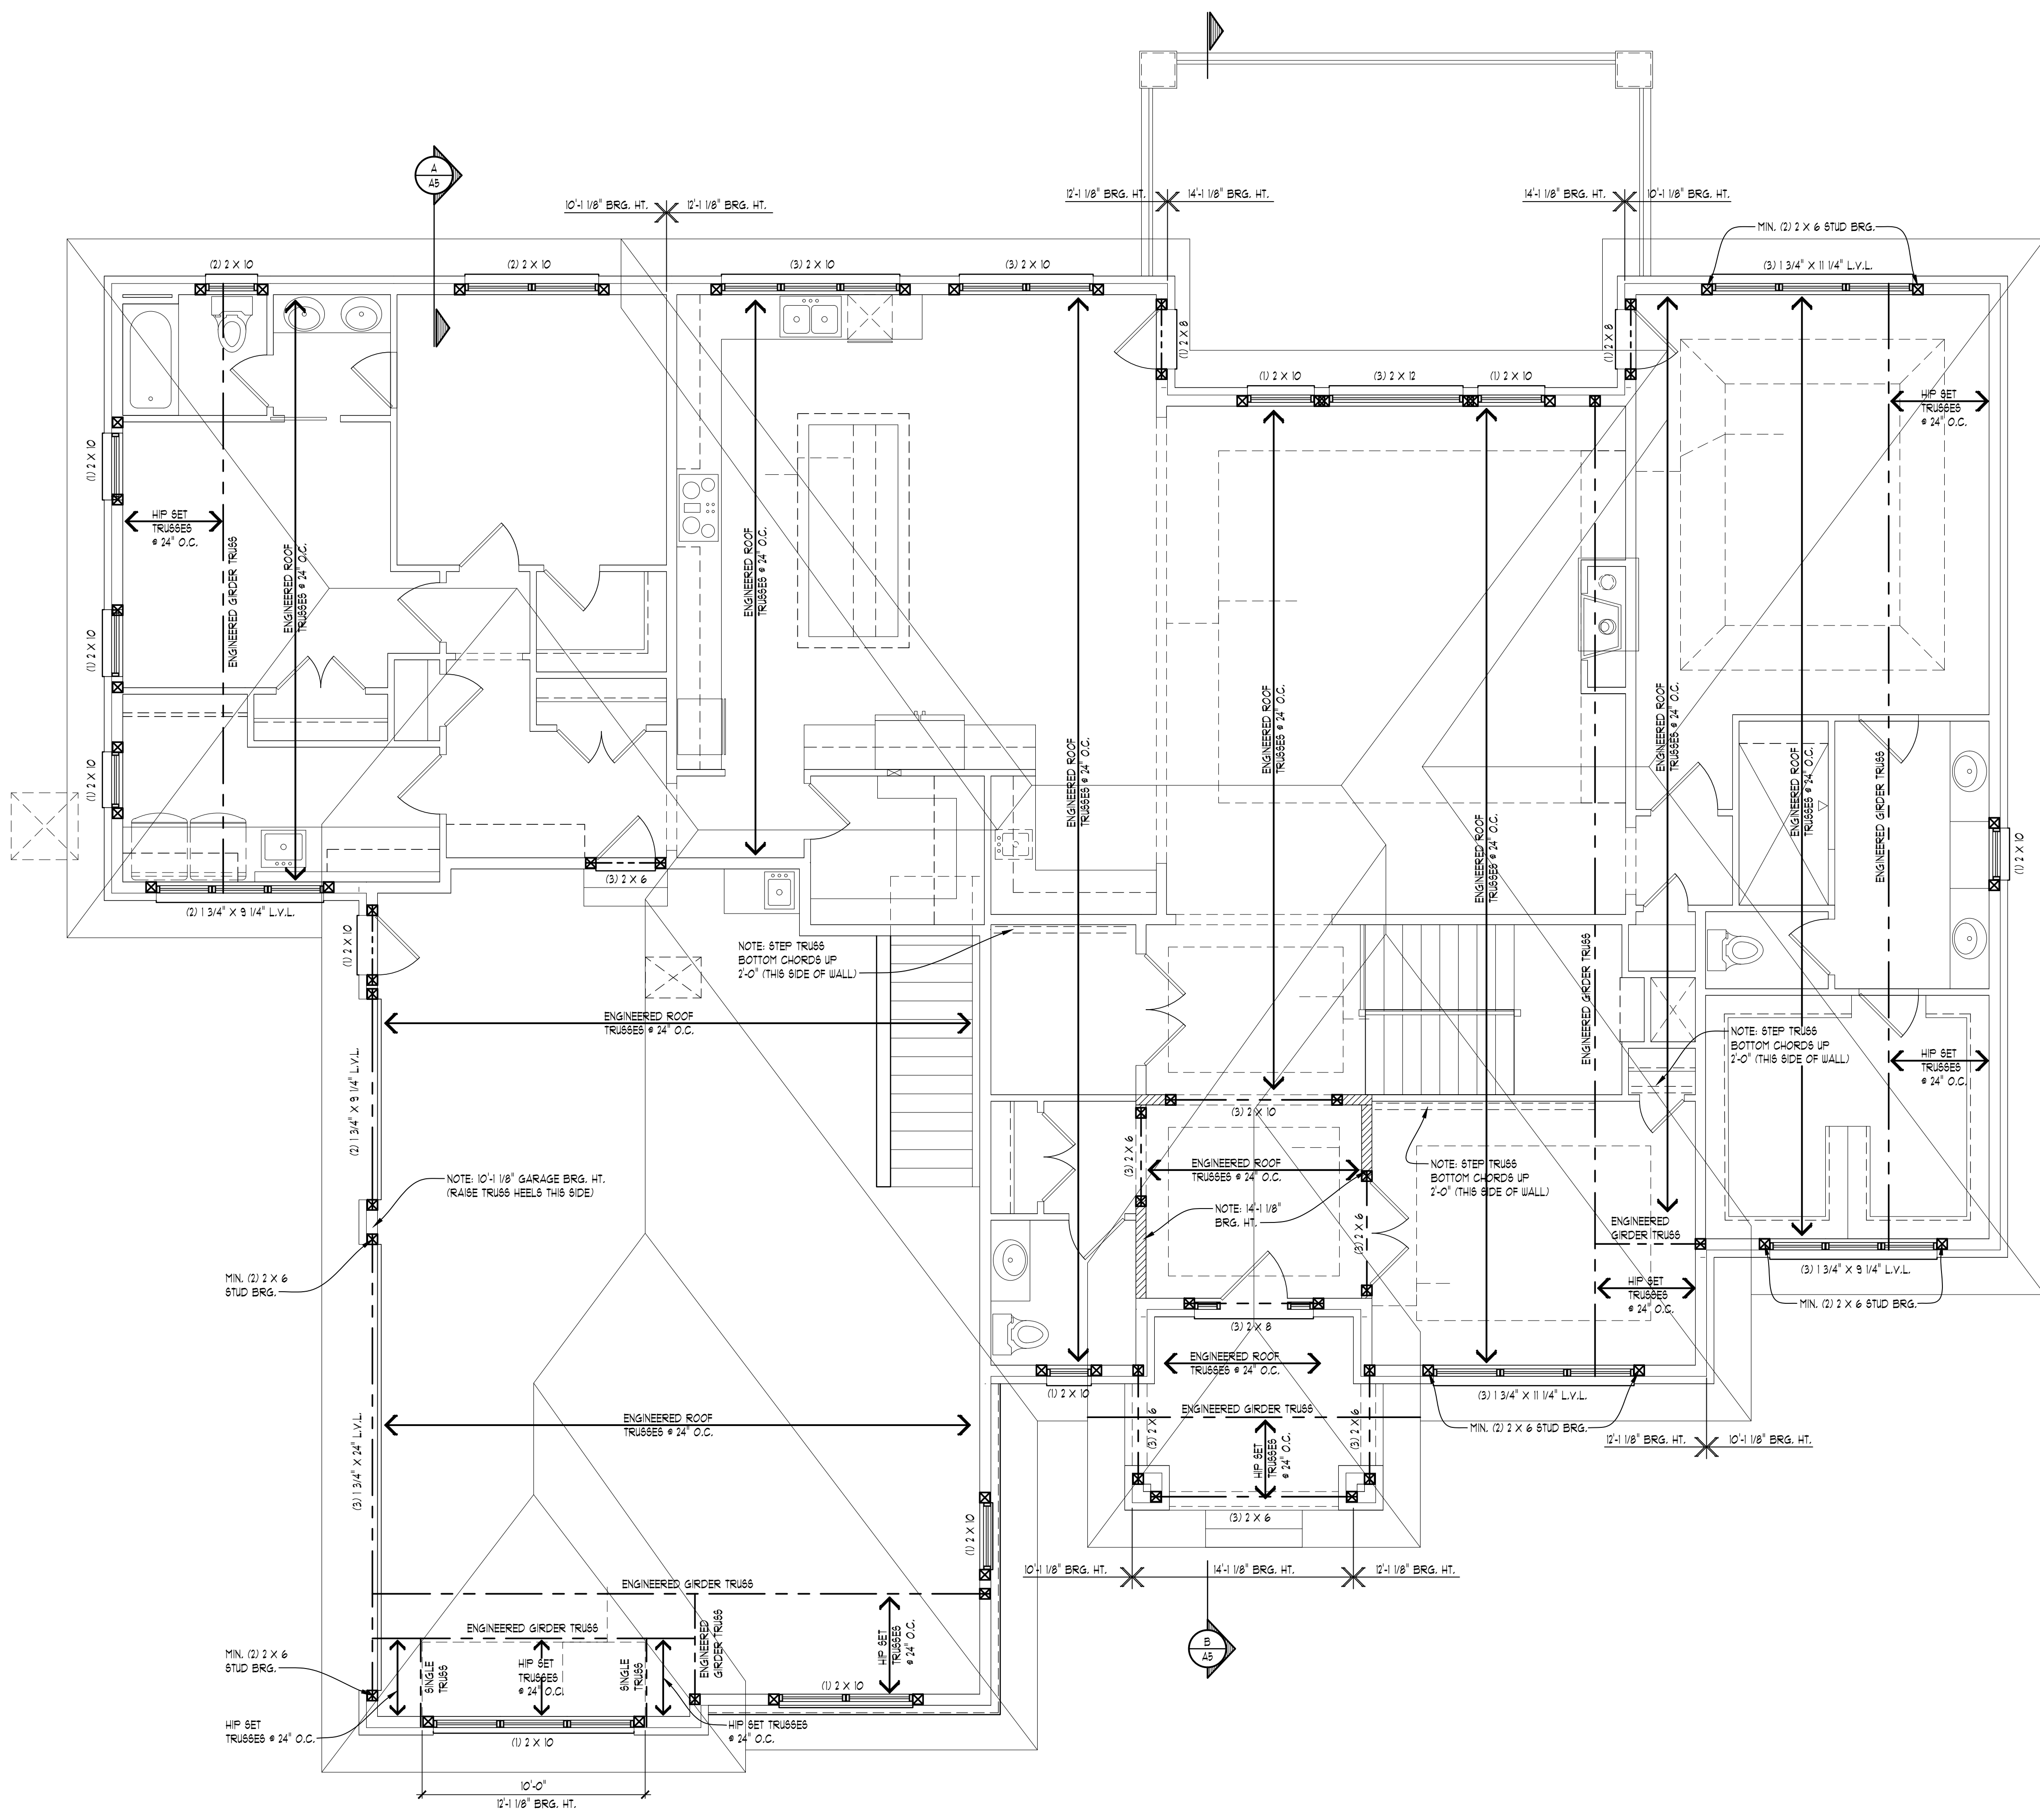

**FIRST FLOOR PLAN STRUCTURE**

SCALE: 1/4" = 1'-0"

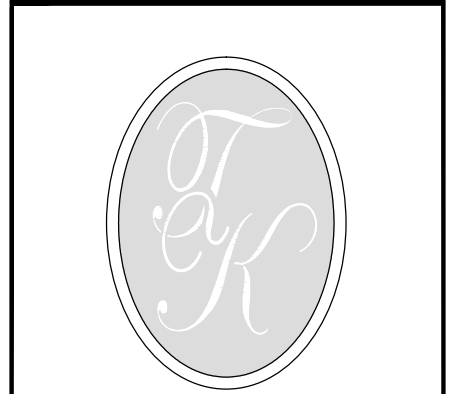

**TK DESIGN & ASSOCIATES**

WWW.TKHOMEDESIGN.COM  
 26030 PONTIAC TRAIL, SOUTH LYON, MI 48178  
 PHONE: (248)-446-1960  
 FAX: (248)-446-1961

COPYRIGHT 2014 TK DESIGN AND ASSOCIATES  
 DO NOT SCALE DRAWINGS. USE CALCULATED DIMENSIONS ONLY. CONSULTOR TO FIELD VERIFY ALL DRAWING ASPECTS BEFORE CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE REPORTED TO THE DESIGNER IN WRITING IMMEDIATELY. CALL MTDI DO NOT AT 800-482-7271 3 DAYS PRIOR TO ANY EXCAVATION. CONSTRUCTION IS THE SOLE RESPONSIBILITY OF THE FIRM/HOUSEHOLD.

**CLIENT / PROJECT**  
 COMPO BUILDERS  
 MILLEN RESIDENCE  
 MONTEBELLO CRT  
 LOT 21  
 NOVI, MI

**JOB No.** 20-139  
**DRAWN:** AG  
**CHECKED:** BF  
**REVIEW:** 5-1-2020  
**FINAL:** 6-15-2020  
**REVISED:** 6-25-2020  
**REVISED:** 7-14-2020  
**REVISED:** 7-30-2020

**SCALE:**  
 PER PLAN

**SHEET #**  
 S2



**BRACED WALL PANEL LEGEND:**

EXTERIOR WALLS WITH STRUCTURAL SHEATHING (CS-WSP METHOD)

**STRUCTURAL SHEATHING NOTES:**


- DESIGNED FOR SEISMIC ZONE A-C AND WIND SPEEDS OF 115 M.P.H. OR LESS
- WALLS SHALL BE BRACED IN ACCORDANCE WITH SECTION R602.10 OF THE 2015 IBC CODE
- BRACING REQUIREMENTS SHALL BE PER TABLE R602.10.3(1)
- EXTERIOR BRACED WALL PANELS (BWP) SHALL BE CONSTRUCTED IN ACCORDANCE WITH CS-WSP METHOD AS PRESCRIBED IN SECTION R602.10.4 (I.N.O.)
- ALL SHEATHABLE SURFACES OF EXTERIOR WALLS (INCLUDING AREAS ABOVE AND BELOW OPENINGS AND GABLE END WALLS) SHALL BE CONTINUOUSLY SHEATHED WITH WOOD STRUCTURAL PANEL (WSP) SHEATHING WITH A MINIMUM THICKNESS OF 3/8". SHEATHING SHALL BE SECURED WITH MINIMUM #6 COMMON NAILS SPACED AT 6" O.C. AT PANEL EDGES AND SPACED AT 12" O.C. AT INTERMEDIATE SUPPORTS
- LENGTH REQUIREMENTS FOR BRACED WALL PANELS WITH CS-WSP METHOD SHALL BE IN ACCORDANCE WITH TABLE R602.10.4
- PROVIDE #6 COMMON NAILS AT 6" O.C. SPACING AT PANEL EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS.

BRACED WALL WITH CONTINUOUS PORTAL FRAME (CS-PF METHOD)

**CONTINUOUS PORTAL FRAME NOTES:**

- HEADER PROVIDED MUST BE MINIMUM 3" x 11 1/4" SOLID SAUN OR LAMINATED VENEER LUMBER (L.V.L.) SEE SHEET GN-2 FOR CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION DETAIL.


**NOTE:**  
R403.1.6 WALLS 24' TOTAL LENGTH OR SHORTER CONNECTING OFFSET BRACED WALL PANELS SHALL BE ANCHORED TO THE FOUNDATION WITH A MINIMUM OF ONE ANCHOR BOLT LOCATED IN THE CENTER THIRD OF THE PLATE SECTION AND SHALL BE ATTACHED TO ADJACENT BRACED WALL PANELS AT CORNERS AS SHOWN IN ITEM 2 OF TABLE R602.3(1)

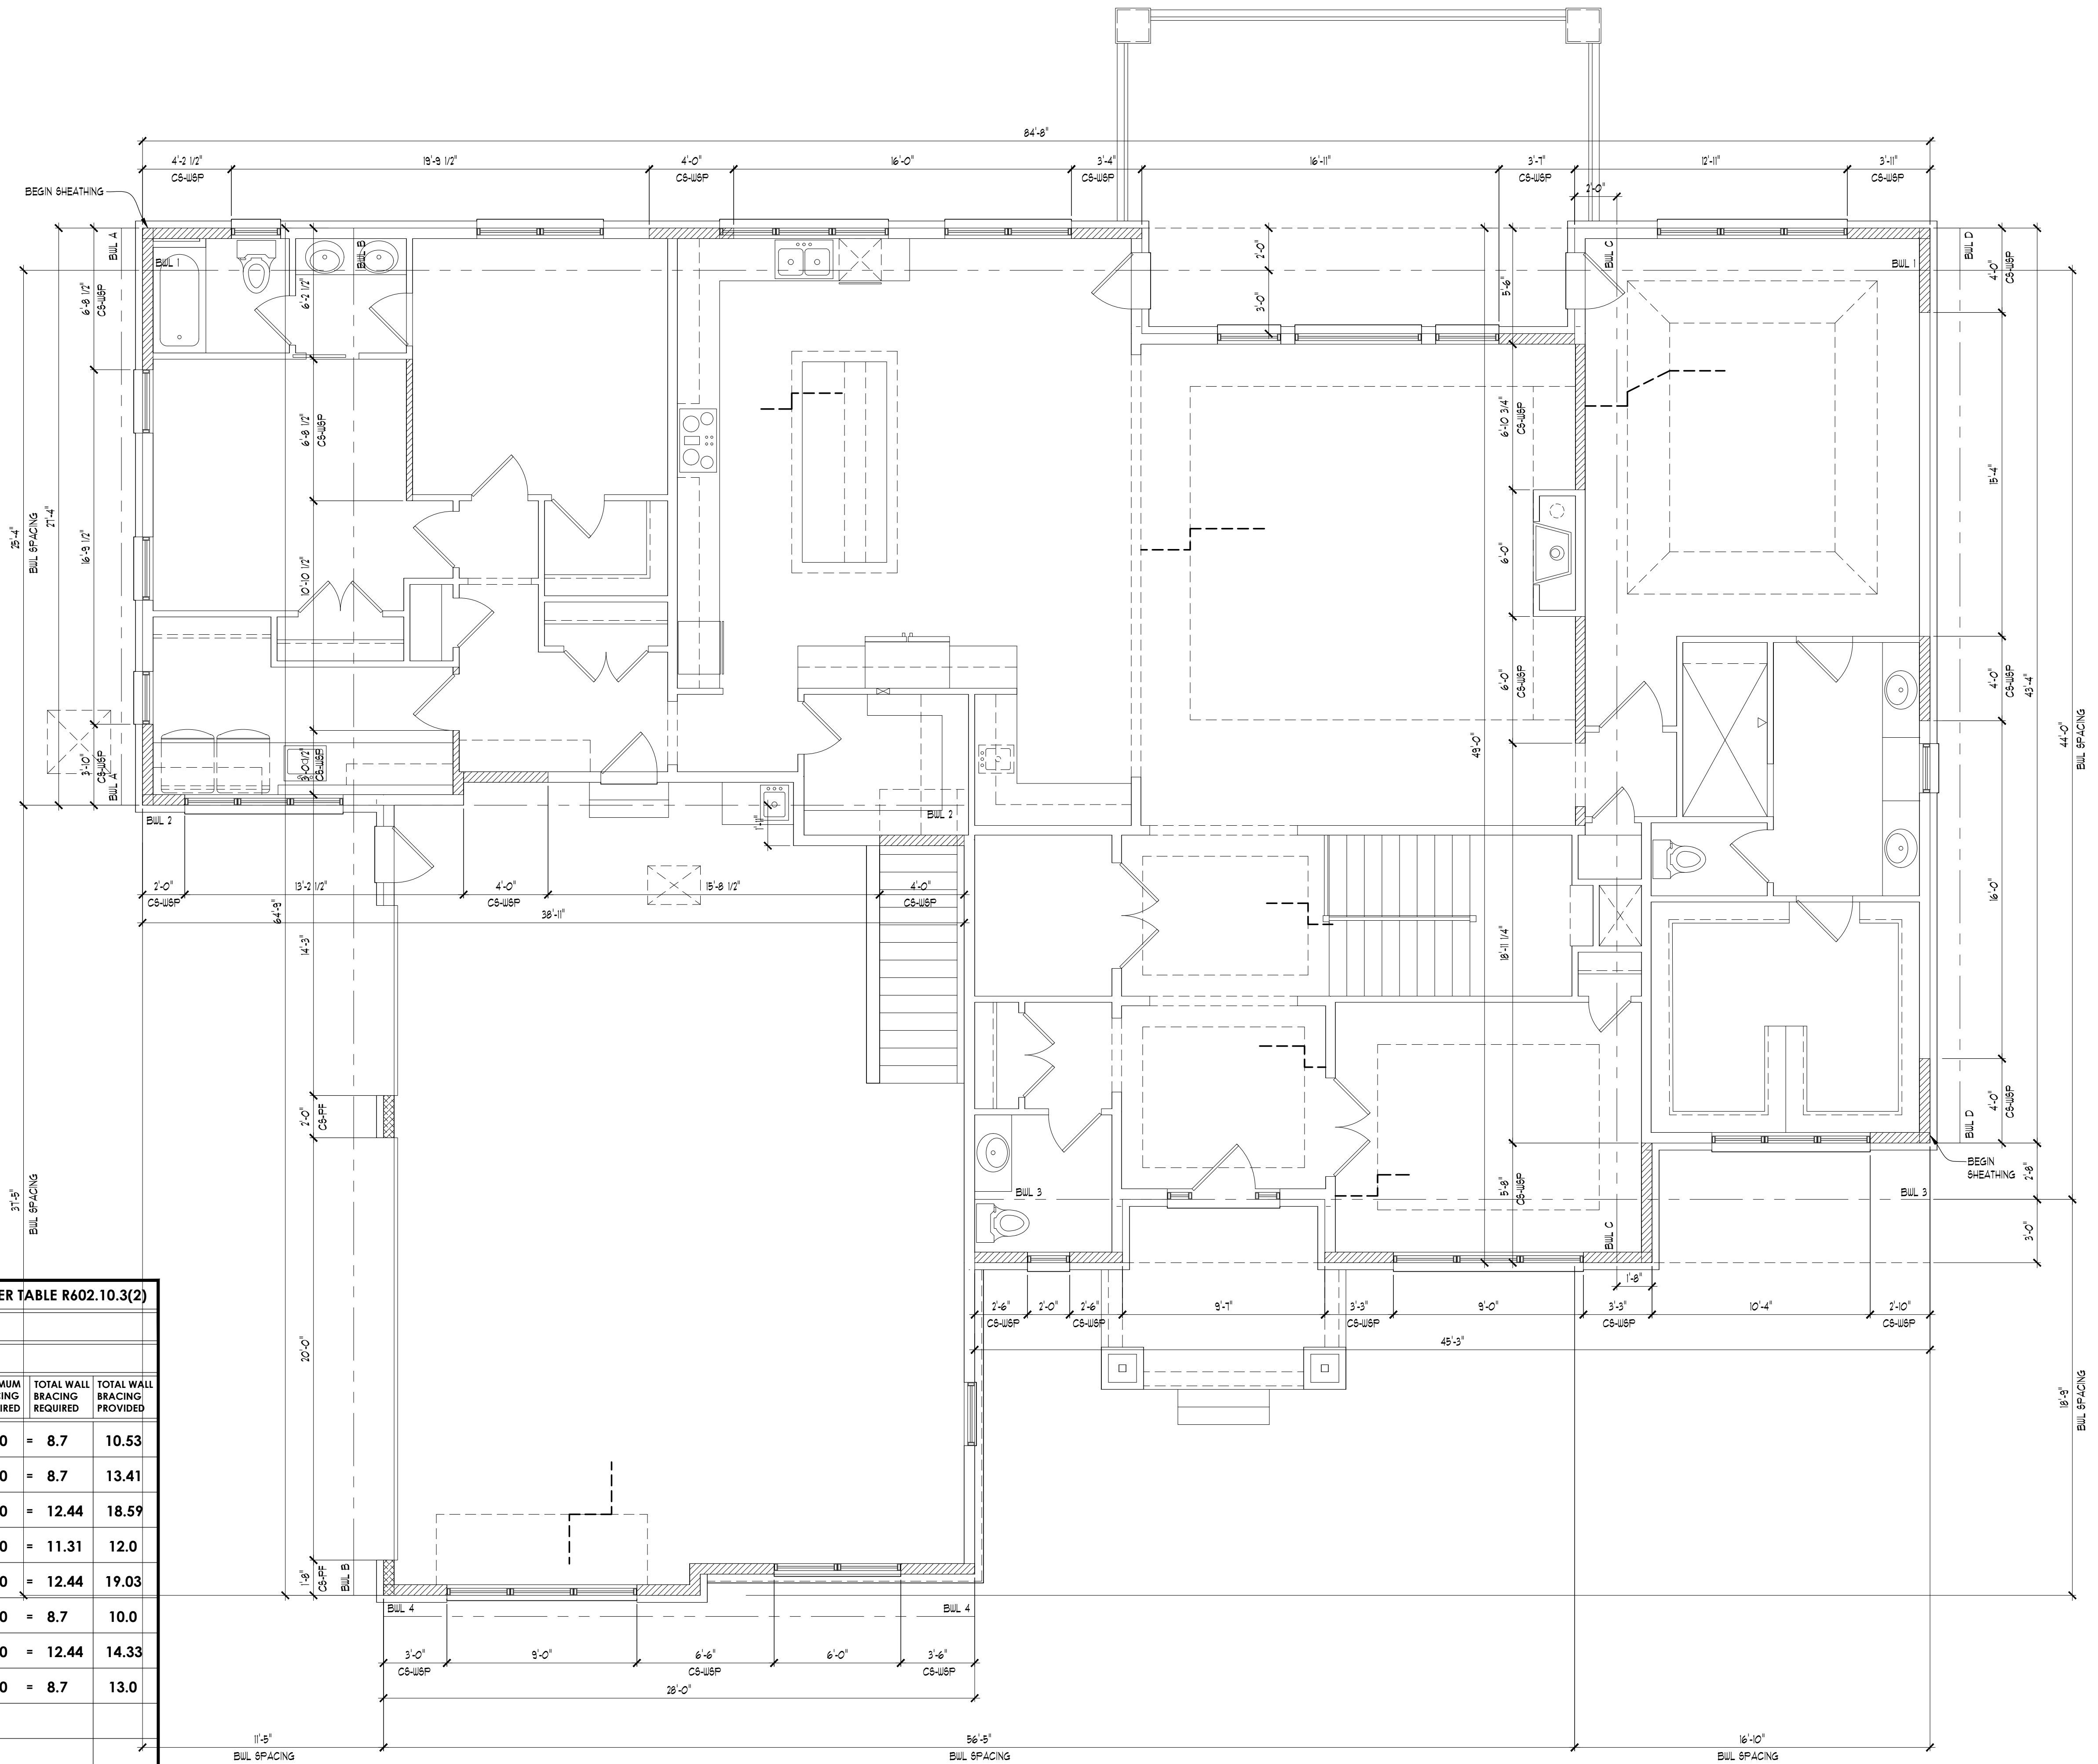

**FIRST FLOOR BRACED WALL PLAN**

SCALE: 1/4" = 1'-0"

WALL BRACING PLAN												PER TABLE R602.10.3(2)					
ULTIMATE DESIGN WIND SPEED: 115 MPH																	
WIND ADJUSTMENT FACTORS TO THE REQUIRED LENGTH OF WALL BRACING																	
BWL	AVERAGE SPACING	STORY LOCATION	EXPOSURE	ROOF EAVE TO RIDGE HT.	WALL HEIGHT	NUMBER OF BWL'S PER DIRECTION	ADDITIONAL ROOF HOLD DOWN DEVICE	INTERIOR GYPSUM BD. FINISH	MINIMUM BRACING REQUIRED	TOTAL WALL BRACING REQUIRED	TOTAL WALL BRACING PROVIDED						
A	33.92		1.0	x	1.0	x	1.0	x	1.45	x	x	6.0	=	8.7	10.53		
B	33.92		1.0	x	1.0	x	1.0	x	1.45	x	x	6.0	=	8.7	13.41		
C	35.62		1.0	x	1.3	x	1.1	x	1.45	x	x	6.0	=	12.44	18.59		
D	35.62		1.0	x	1.3	x	1.0	x	1.45	x	x	6.0	=	11.31	12.0		
1	31.37		1.0	x	1.3	x	1.1	x	1.45	x	x	6.0	=	12.44	19.03		
2	31.37		1.0	x	1.0	x	1.0	x	1.45	x	x	6.0	=	8.7	10.0		
3	31.37		1.0	x	1.3	x	1.1	x	1.45	x	x	6.0	=	12.44	14.33		
4	31.37		1.0	x	1.0	x	1.0	x	1.45	x	x	6.0	=	8.7	13.0		

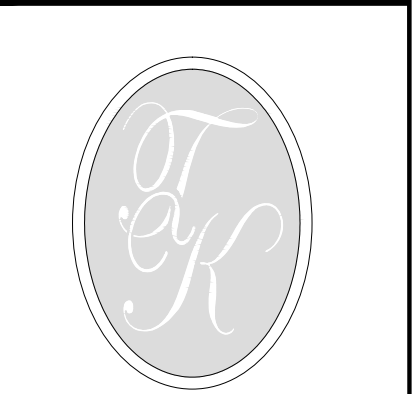

**TK DESIGN & ASSOCIATES**

WWW.TKHOMEDESIGN.COM  
26030 PONTIAC TRAIL, SOUTHELYON, MI 48178  
PHONE: (248)-446-1960  
FAX: (248)-446-1961

COPYRIGHT 2014 TK DESIGN AND ASSOCIATES  
DO NOT SCALE DRAWINGS. USE CALCULATED DIMENSIONS ONLY  
CONTRACTOR TO FIELD VERIFY ALL DRAWING ASPECTS BEFORE  
CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE  
REPORTED TO THE DESIGNER IN WRITING IMMEDIATELY.  
CALL MTDI DO AT 800-482-7271 3 DAYS PRIOR TO ANY EXCAVATION  
CONSTRUCTION. THE SOLE RESPONSIBILITY OF THE PROFESSIONAL

**CLIENT / PROJECT**  
COMPO BUILDERS  
MILLEN RESIDENCE  
MONTEBELLO CRT  
LOT 21  
NOVI, MI


JOB No. 20-139  
DRAWN: AG  
CHECKED: BF  
REVIEW: 5-1-2020  
FINAL: 6-15-2020  
REVISED 6-25-2020  
REVISED 7-14-2020  
REVISED 7-30-2020

SCALE:  
PER PLAN

SHEET #  
**BW-1**


# ELECTRICAL SYMBOL KEY

GRAPHIC SYMBOL	DESCRIPTION	GRAPHIC SYMBOL	DESCRIPTION
	RECESSED WHITE BAFFLE 6' FIXTURE		PADDLE TYPE CEILING FAN W/ LIGHT
	RECESSED WHITE BAFFLE 4' FIXTURE		RECESSED EXHAUST, LOW NOISE, FAN
	KEYLESS FIXTURE		FAN / LIGHT COMBO
	RECESSED ADJUSTABLE WALL WASH FIXTURE		ELECTRICAL OUTLET WALL MOUNTED
	SURFACE MOUNTED INCANDESCENT FIXTURE		ELECTRICAL OUTLET GROUND FAULT INTERRUPTED TYPICAL WIRED THROUGHOUT ROOM
	HANGING DECORATIVE FIXTURE, PENDANT OR CHANDALIER		WATER PROTECTED ELECTRICAL OUTLET GROUND FAULT INTERRUPTED
	FULL-CHAIN OPERATED SURFACE MOUNTED INCANDESCENT FIXTURE		8/11 WIRED ELECTRICAL OUTLET CONTROLLED BY A SWITCH
	WALL MOUNTED INCANDESCENT DECORATIVE SCNCE		220 VOLT ELECTRICAL OUTLET
	WALL MOUNTED COMPACT FLUORESCENT LOW PROFILE DECORATIVE SCNCE		ELECTRICAL OUTLET FLOOR MOUNTED
	UNIVERSAL SERIAL BUS		POWER SWITCH
	PHONE LINE		3-WAY POWER SWITCH
	CABLE T.V.		SMOKE DETECTOR INTER-CONNECTED W/ BATTERY BACKUP PER CODE
	GAS LINE		SMOKE DETECTOR / CARBON MONOXIDE DETECTOR INTER-CONNECTED W/ BATTERY BACKUP PER CODE
	SURFACE MOUNTED FLOURESCENT W/ ACRYLIC DIFFUSER		ELECTRIC METER
	KEYLESS FIXTURE - JUNCTION BOX		GAS METER

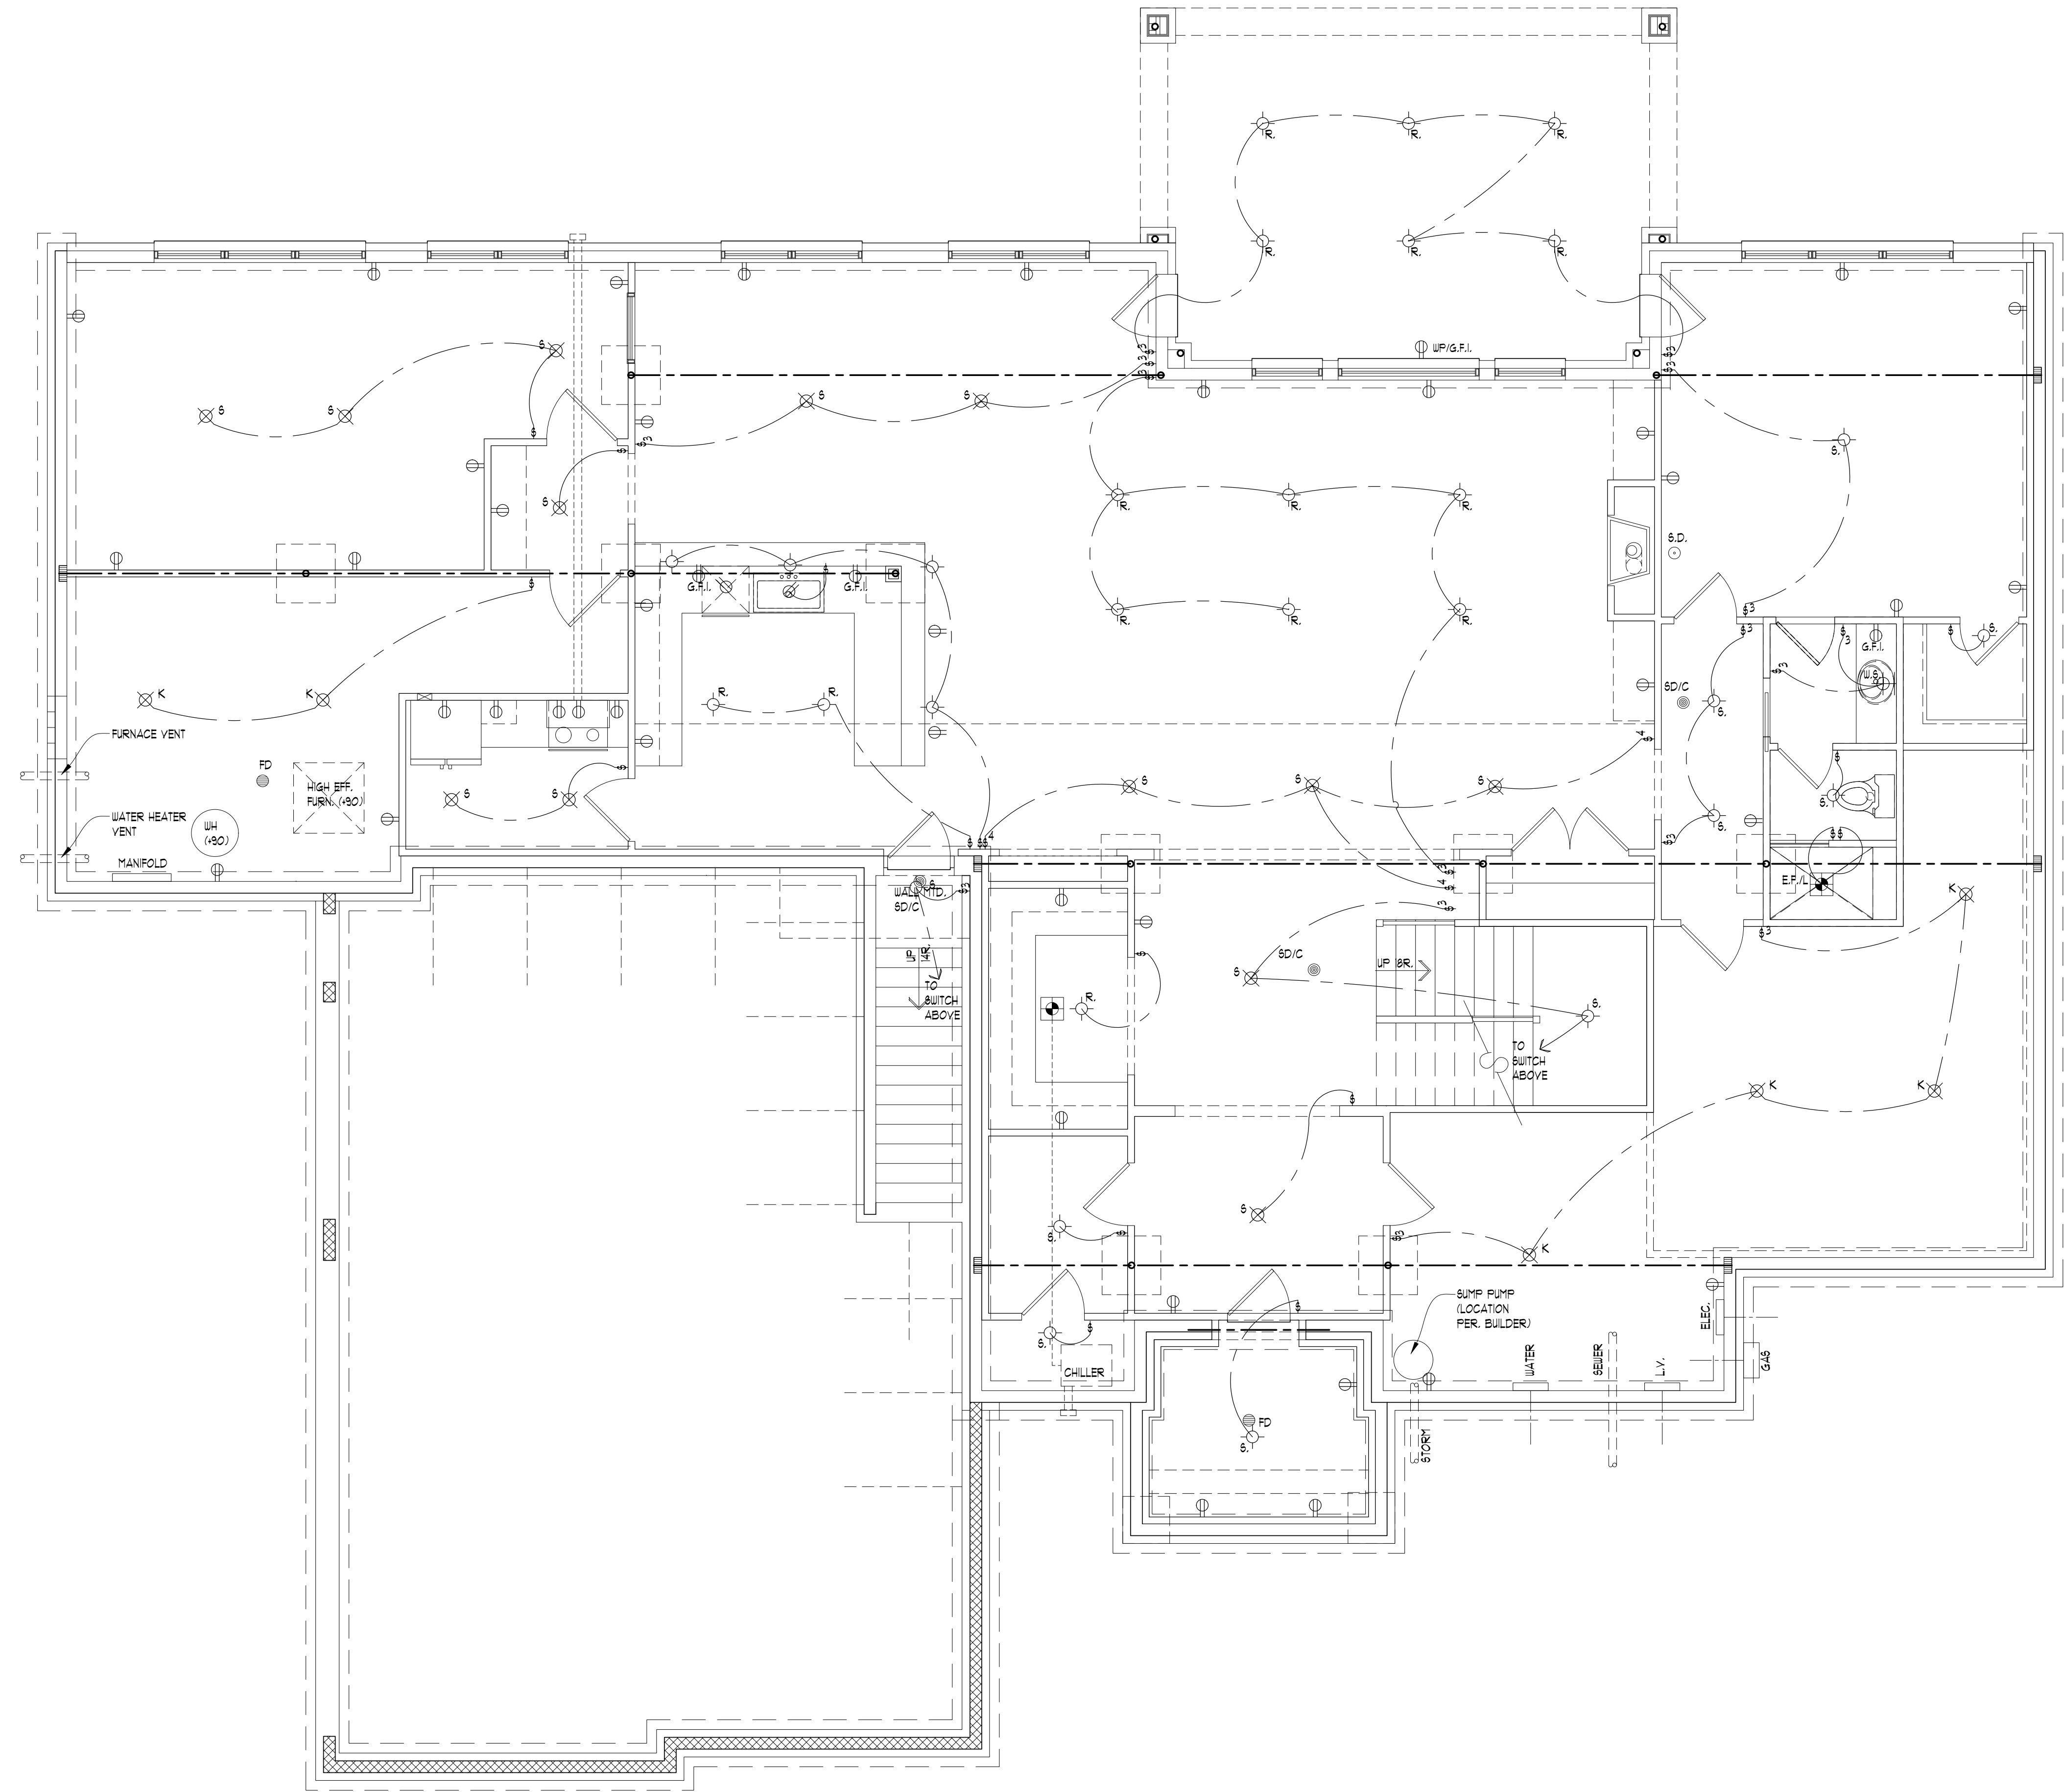

## FINISHED BASEMENT PLAN ELECTRICAL

SCALE: 1/4" = 1'-0"

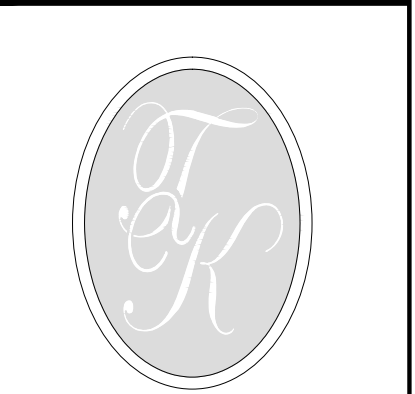

TK DESIGN & ASSOCIATES

WWW.TKHOMEDESIGN.COM

26030 PONTIAC TRAIL,  
SOUTH LYONS, MI 48178  
PHONE: (248)-446-1960  
FAX: (248)-446-1961

COPYRIGHT 2017 TK DESIGN AND ASSOCIATES  
DO NOT SCALE DRAWINGS. USE CALCULATED DIMENSIONS ONLY.  
CONTRACTOR TO FIELD VERIFY ALL DRAWING ASPECTS BEFORE  
CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE  
REPORTED TO THE DESIGNER IN WRITING IMMEDIATELY.  
CALL MTDI 248-446-1961 3 DAYS PRIOR TO ANY EXCAVATION.  
CONTRACTOR IS THE SOLE RESPONSIBILITY OF THE PROFESSIONAL.

CLIENT / PROJECT  
**COMPO BUILDERS  
MILLEN RESIDENCE  
MONTEBELLO CRT  
LOT 21  
NOVI, MI**


JOB No. 20-139  
DRAWN: AG  
CHECKED: BF  
REVIEW: 5-1-2020  
FINAL: 6-15-2020  
REVISED 6-25-2020  
REVISED 7-14-2020  
REVISED 7-30-2020

SCALE:  
PER PLAN

SHEET #  
**E-1**

# ELECTRICAL SYMBOL KEY

GRAPHIC SYMBOL	DESCRIPTION	GRAPHIC SYMBOL	DESCRIPTION
	RECESSED WHITE BAFFLE 6" FIXTURE		PADDLE TYPE CEILING FAN W/ LIGHT
	RECESSED WHITE BAFFLE 4" FIXTURE		RECESSED EXHAUST, LOW NOISE FAN
	KEYLESS FIXTURE		FAN / LIGHT COMBO
	RECESSED ADJUSTABLE WALL WASH FIXTURE		ELECTRICAL OUTLET WALL MOUNTED
	SURFACE MOUNTED INCANDESCENT FIXTURE		ELECTRICAL OUTLET GROUND FAULT INTERRUPTED TYPICAL WIRED THROUGHOUT ROOM
	HANGING DECORATIVE FIXTURE, PENDANT OR CHANDALIER		WATER PROTECTED ELECTRICAL OUTLET GROUND FAULT INTERRUPTED
	FULL-CHAIN OPERATED SURFACE MOUNTED INCANDESCENT FIXTURE		SPLIT WIRED ELECTRICAL OUTLET CONTROLLED BY A SWITCH
	WALL MOUNTED INCANDESCENT DECORATIVE SCENCE		220 VOLT ELECTRICAL OUTLET
	WALL MOUNTED COMPACT FLUORESCENT LOW PROFILE DECORATIVE SCENCE		ELECTRICAL OUTLET FLOOR MOUNTED
	UNIVERSAL SERIAL BUS		POWER SWITCH
	PHONE LINE		3-WAY POWER SWITCH
	CABLE T.V.		SMOKE DETECTOR INTER-CONNECTED W/ BATTERY BACKUP PER CODE
	GAS LINE		SMOKE DETECTOR / CARBON MONOXIDE DETECTOR INTER-CONNECTED W/ BATTERY BACKUP PER CODE
	SURFACE MOUNTED FLOURESCENT W/ACRYLIC DIFFUSER		ELECTRIC METER
	KEYLESS FIXTURE - JUNCTION BOX		GAS METER

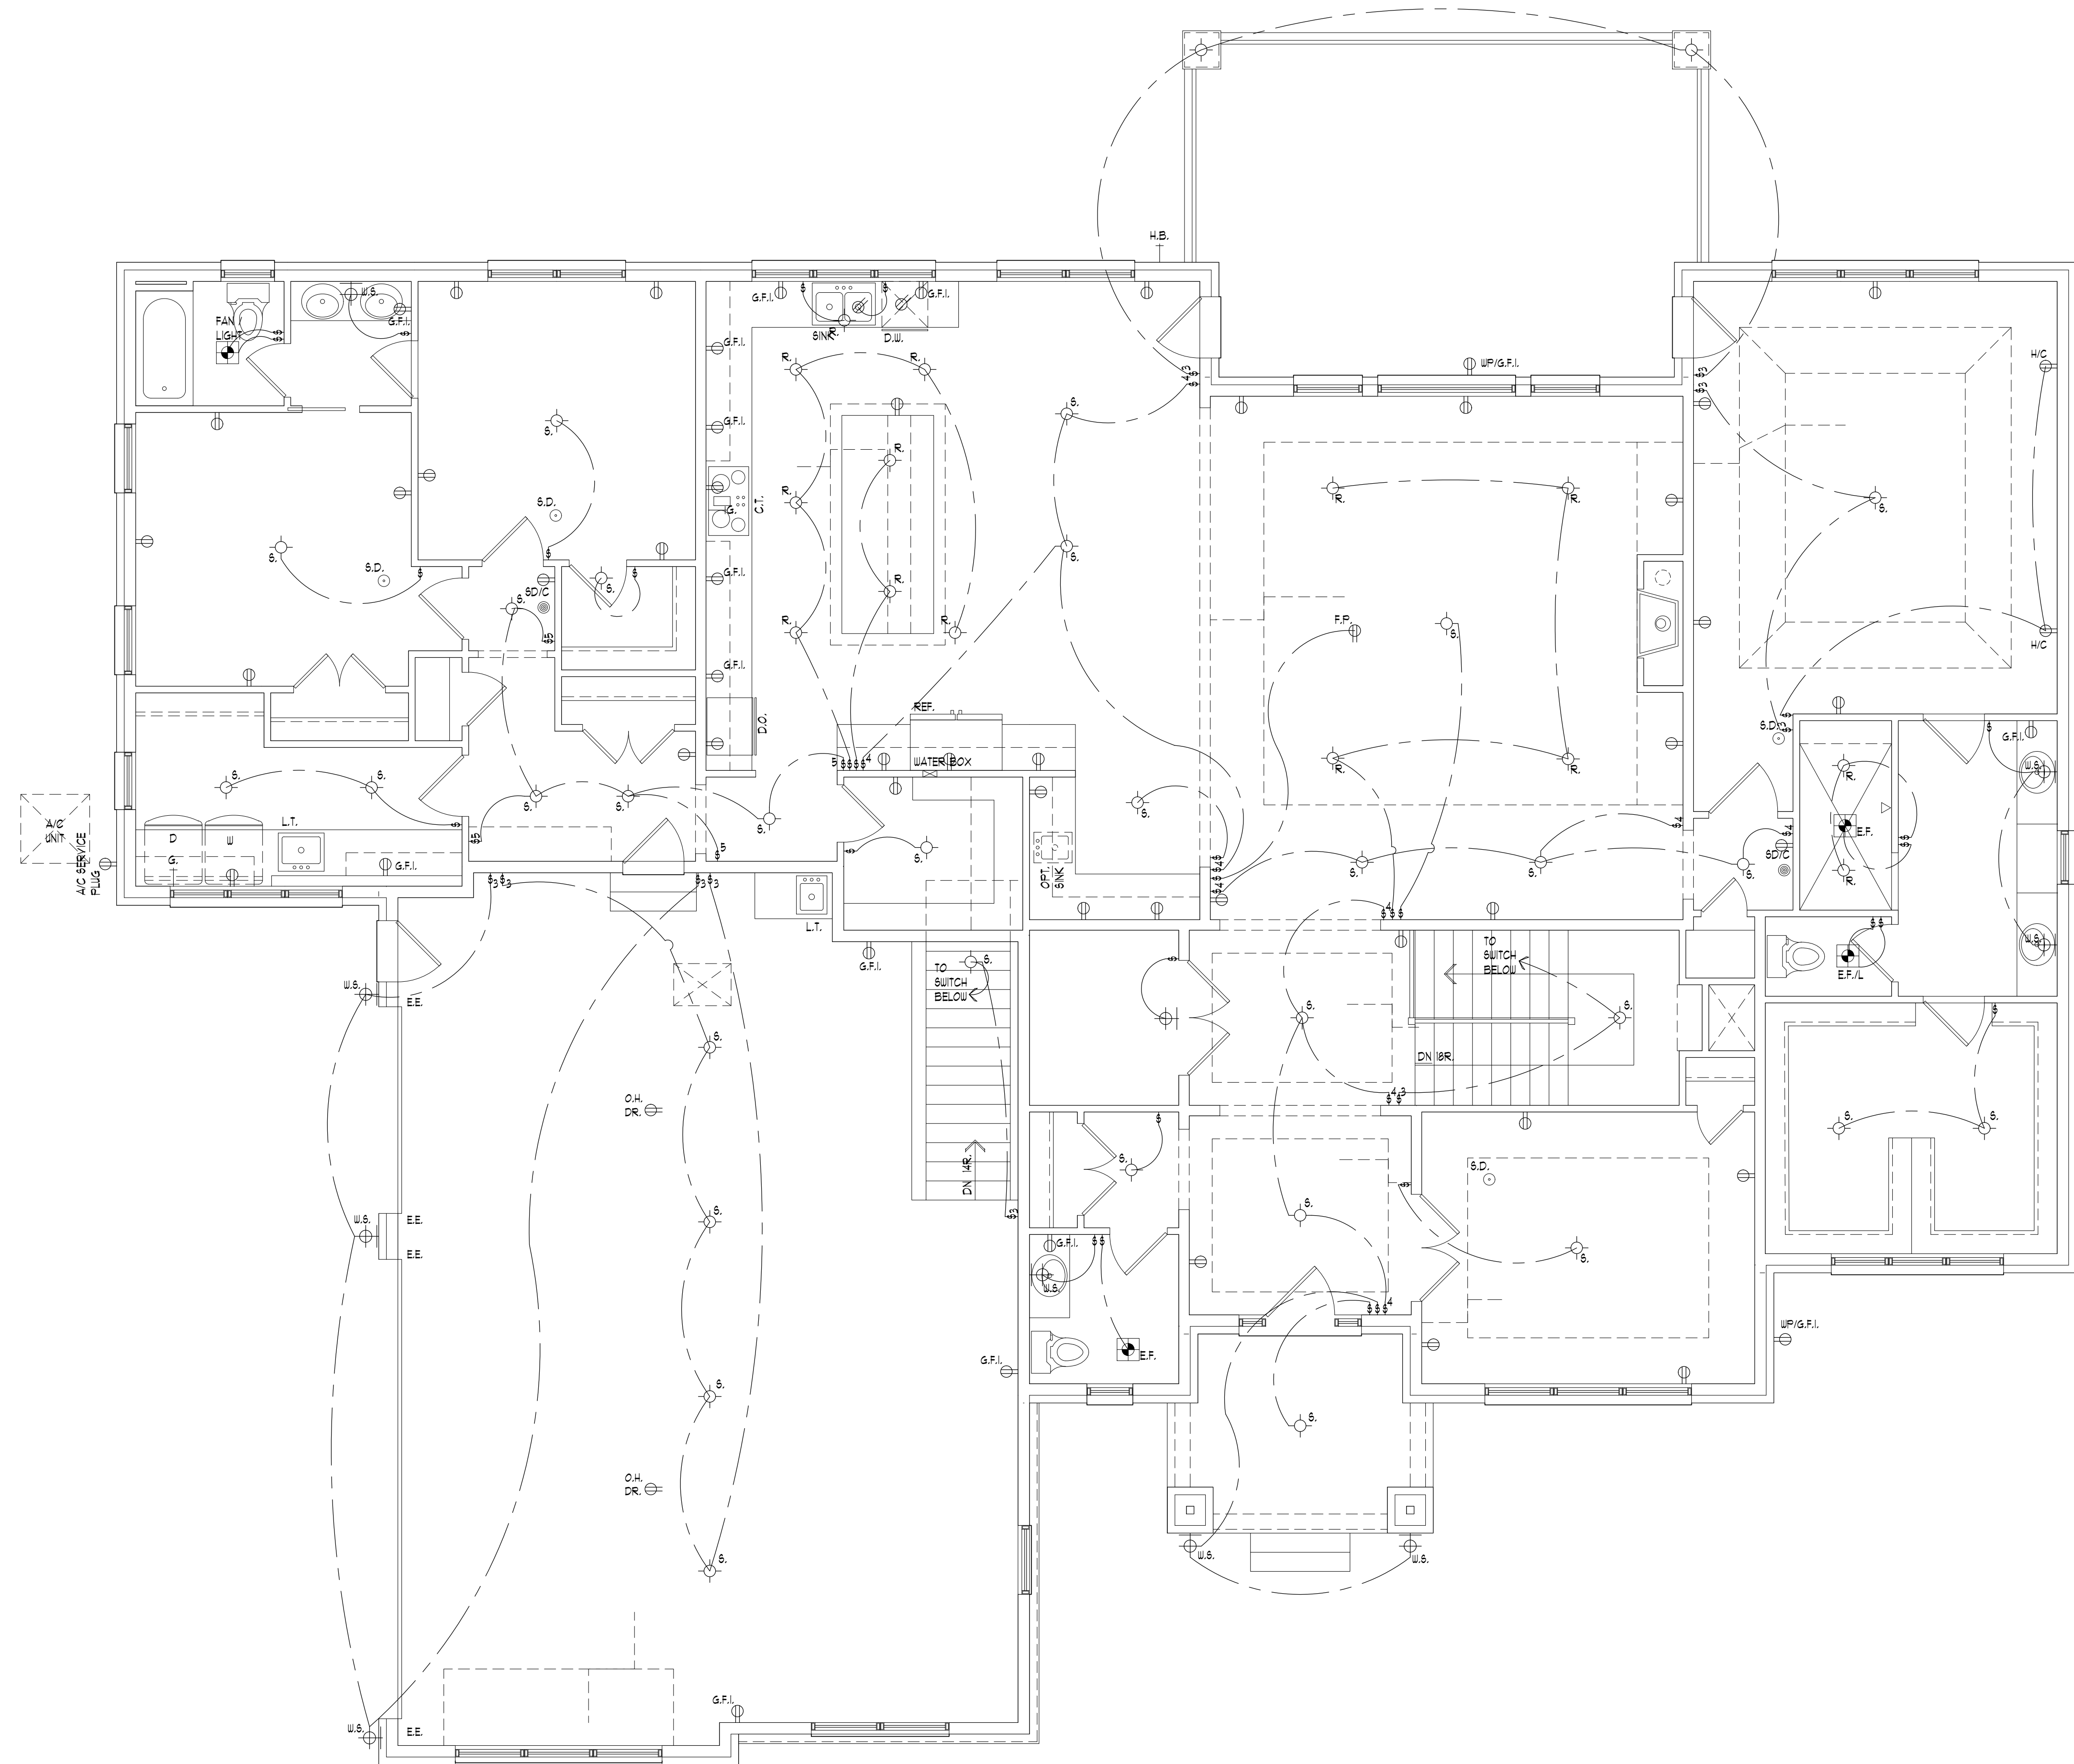

## FIRST FLOOR PLAN ELECTRICAL

SCALE: 1/4" = 1'-0"



26030 PONTIAC TRAIL,  
SOUTH LYONS, MI 48178  
PHONE: (248)-446-1960  
FAX: (248)-446-1961



COPYRIGHT 2017 TK DESIGN AND ASSOCIATES  
DO NOT SCALE DRAWINGS. USE CALCULATED DIMENSIONS ONLY.  
CONTRACTOR TO FIELD VERIFY ALL DRAWING ASPECTS BEFORE  
CONSTRUCTION. DISCREPANCIES AND DESIGN CHANGES SHALL BE  
REPORTED TO THE DESIGNER IN WRITING IMMEDIATELY.  
CALL MTDI DO AT 800-482-7271 3 DAYS PRIOR TO ANY EXCAVATION  
CONSTRUCTION. THE SOLE RESPONSIBILITY OF THE PROFESSIONAL

CLIENT / PROJECT  
**COMPO BUILDERS  
MILLEN RESIDENCE  
MONTEBELLO CRT  
LOT 21  
NOVI, MI**

JOB No. 20-139  
DRAWN: AG  
CHECKED: BF  
REVIEW: 5-1-2020  
FINAL: 6-15-2020  
REVISED 6-25-2020  
REVISED 7-14-2020  
REVISED 7-30-2020

SCALE:  
PER PLAN

SHEET #  
**E-2**

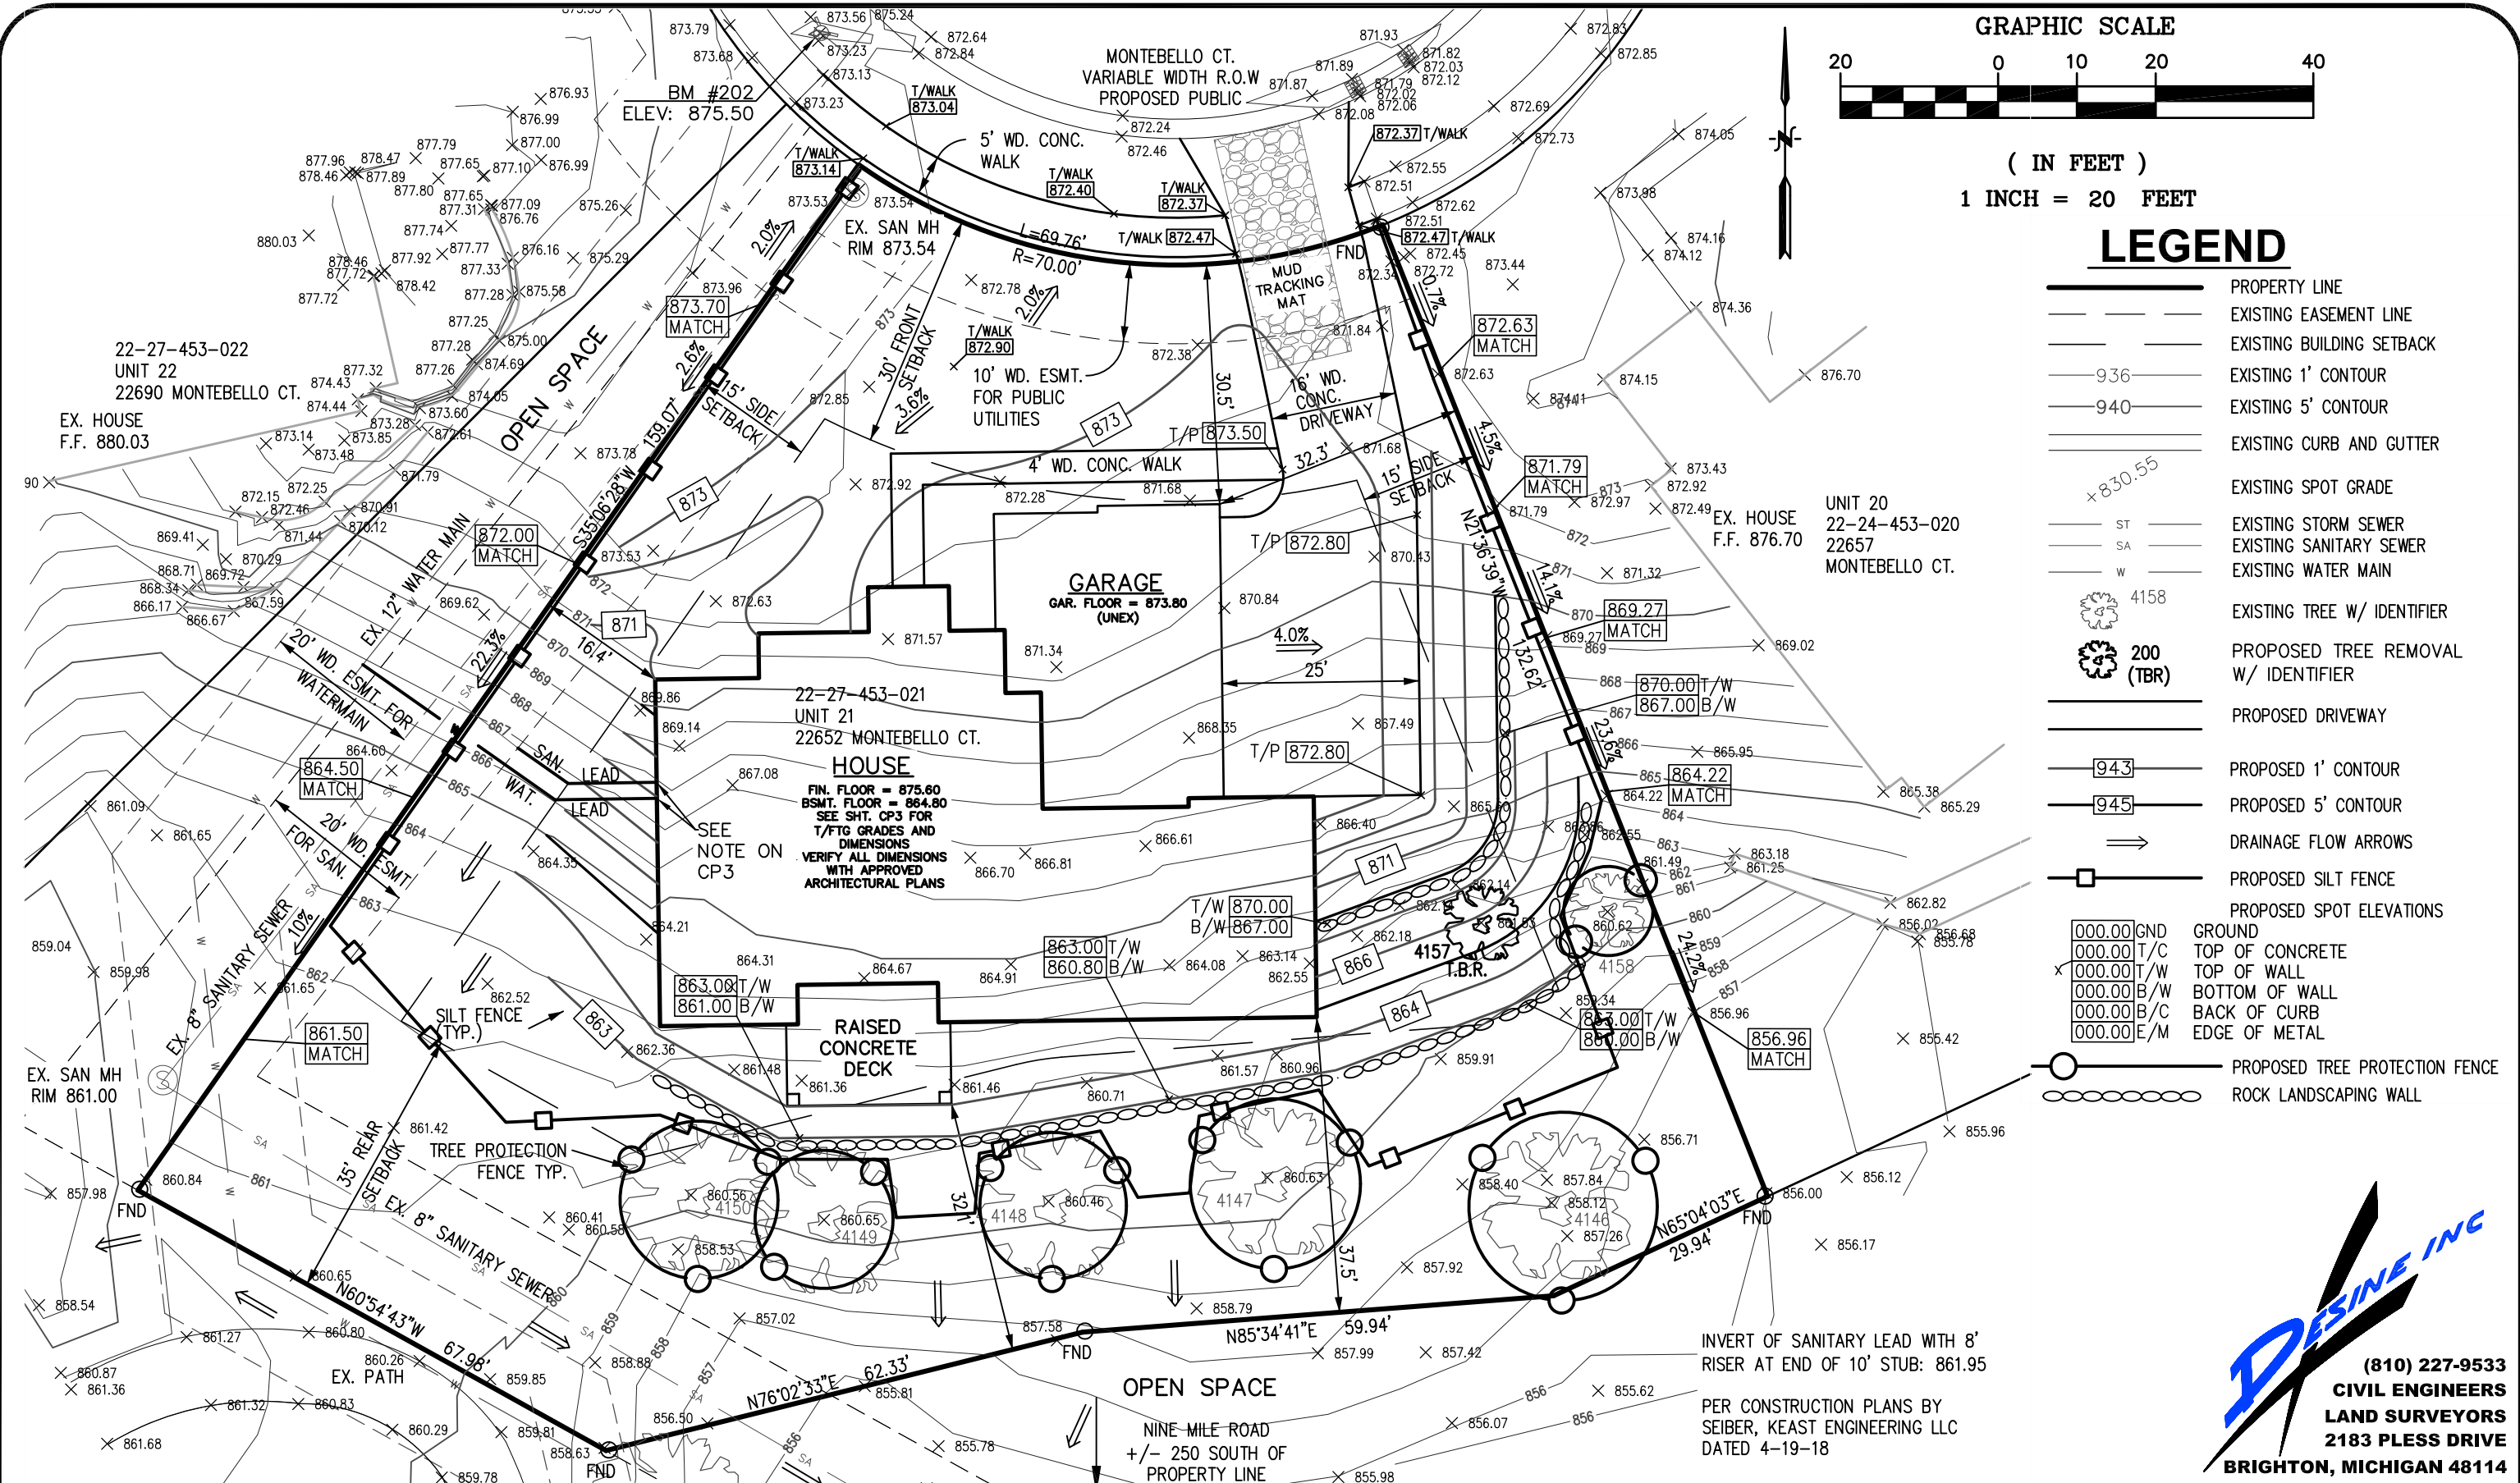

( IN FEET )  
1 INCH = 20 FEET

### LEGEND

- — — — — PROPERTY LINE
- — — — — EXISTING EASEMENT LINE
- — — — — EXISTING BUILDING SETBACK
- 936- EXISTING 1' CONTOUR
- 940- EXISTING 5' CONTOUR
- — — — — EXISTING CURB AND GUTTER
- — — — — EXISTING SPOT GRADE
- ST — EXISTING STORM SEWER
- SA — EXISTING SANITARY SEWER
- W — EXISTING WATER MAIN
- ⊗ 4158 EXISTING TREE W/ IDENTIFIER
- ⊗ 200 (TBR) PROPOSED TREE REMOVAL W/ IDENTIFIER
- — — — — PROPOSED DRIVEWAY
- 943- PROPOSED 1' CONTOUR
- 945- PROPOSED 5' CONTOUR
- ⇒ DRAINAGE FLOW ARROWS
- PROPOSED SILT FENCE
- PROPOSED SPOT ELEVATIONS
- 000.00 GND GROUND
- 000.00 T/C TOP OF CONCRETE
- 000.00 T/W TOP OF WALL
- 000.00 B/W BOTTOM OF WALL
- 000.00 B/C BACK OF CURB
- 000.00 E/M EDGE OF METAL
- PROPOSED TREE PROTECTION FENCE
- ⊖ ROCK LANDSCAPING WALL

INVERT OF SANITARY LEAD WITH 8' RISER AT END OF 10' STUB: 861.95  
PER CONSTRUCTION PLANS BY SEIBER, KEAST ENGINEERING LLC DATED 4-19-18

(810) 227-9533  
CIVIL ENGINEERS  
LAND SURVEYORS  
2183 PLESS DRIVE  
BRIGHTON, MICHIGAN 48114

DESIGN: SVB  
DRAFT: SES  
CHECK: SVB

REVISED

# PLOT PLAN

## UNIT 21, MONTEBELLO ESTATES

CLIENT:  
COMPO BUILDERS  
42700 W TEN MILE ROAD  
NOVI, MI 48375

SCALE: 1" = 20'  
PROJECT No.: 183468  
DWG NAME: 3468 CP  
**AUG. 13, 2020**

# CP1

# BENCHMARKS


DATUM BASED ON CITY OF NOVI BM,  
REF: "MONTEBELLO ESTATES" O.C.C.S.P.  
No. 2172

BENCHMARK #2742  
"X" ON NORTH RIM OF SANITARY  
MANHOLE LOCATED 15' NORTH OF THE  
C/L OF NINE MILE ROAD AND 160' EAST  
OF DRIVE #44000 NINE MILE ROAD  
ELEVATION = 873.24 (USGS DATUM)

BENCHMARK #3411  
"X" ON NORTH RIM OF GATEWELL  
LOCATED IN THE SOUTHWEST QUAD OF  
THE INTERSECTION OF NINE MILE ROAD  
AND CENTER STREET, 50' WEST OF THE  
CENTERLINE OF CENTER STREET  
ELEVATION = 873.64 (USGS DATUM)

BENCHMARK #202  
ARROW ON HYDRANT, LOCATED NEAR  
THE NORTHEASTERLY CORNER OF UNIT  
22.  
ELEVATION = 875.50 (NAVD 88)

BENCHMARK #203  
SOUTHEASTERLY CORNER OF  
TRANSFORMER PAD, LOCATED ON THE  
COMMON LINE OF UNITS 19 AND 18.  
ELEVATION = 876.64 (NAVD 88)

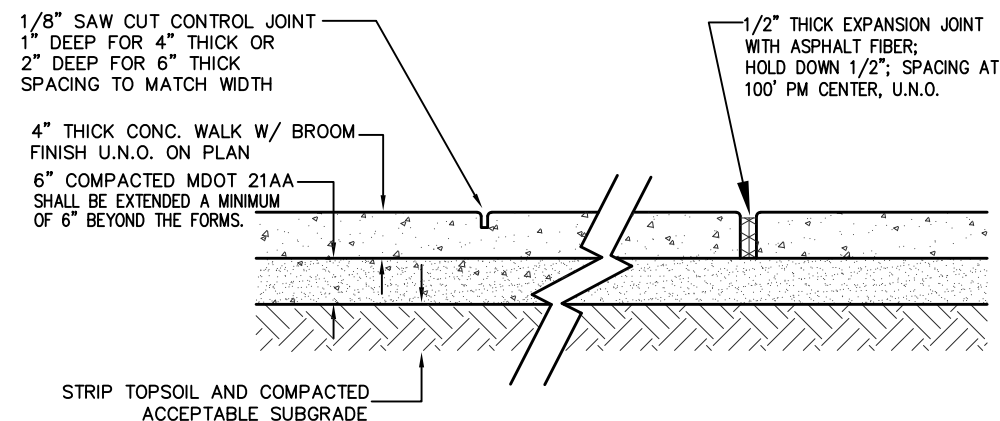

## SIDEWALK CROSS SECTION

NOT TO SCALE

- NOTES:
- SEE PLAN FOR WIDTH OF SIDEWALK.
  - PROVIDE CONCRETE TYPE PER LOCAL CODE. (4000 PSI AIR ENTRAINED)
  - WALK THROUGH DRIVEWAY SHALL BE 6" THICK.
  - SIDEWALK MAXIMUM CROSS SLOPE OF 2%.
  - LONGITUDINAL SIDEWALK SLOPE (FINISHED) SHOULD NOT EXCEED 5%-7% (8.3% MAXIMUM).
  - ALL SIDEWALKS SHALL BE CONSTRUCTED ACCORDING TO THE AMERICANS WITH DISABILITIES ACT (ADA) STANDARDS.
  - SIDEWALK SHALL BE 5' WIDE AND 4" THICK (6" THICK AT DRIVES).

# TREE NOTES

1) APPLICANT TO COMPLY WITH CITY OF NOVI WOODLAND ORDINANCE, CHAPTER 37 DURING CONSTRUCTION.

2) A WOODLAND PERFORMANCE FINANCIAL GUARANTEE FOR THE REPLACEMENT TREE CREDITS SHALL BE PAID BY THE APPLICANT PRIOR TO THE ISSUANCE OF BUILDING PERMITS.

3) REQUIRED REPLACEMENT TREES WILL BE PLANTED ON THE OWNERS LOT AND THE LANDSCAPE PLAN IS TO BE PROVIDED. THE LANDSCAPE PLAN IS TO BE IN CONFORMANCE WITH THE CITY OF NOVI WOODLAND ORDINANCE, CHAPTER 37 AND BE CONSISTENT WITH THE NOVI LANDSCAPE DESIGN MANUAL. IF SUITABLE REPLACEMENT LOCATIONS ARE NOT AVAILABLE ON SITE FOR ALL REQUIRED REPLACEMENT TREES THE APPLICANT SHALL PAY INTO THE CITY TREE FUND THE APPROPRIATE AMOUNT. A WOODLAND MAINTENANCE GUARANTEE WILL BE PROVIDED PER THE CITY OF NOVI WOODLAND ORDINANCE, CHAPTER 37.

4) NO GRADING SHALL OCCUR IN THE CRITICAL ROOT ZONE OF EXISTING TREES. TREE PROTECTION FENCE SHALL BE PROVIDED AT THE EDGE OF THE CRITICAL ROOT ZONE OF TREES TO REMAIN.

5) ALL ON-SITE WOODLAND REPLACEMENT TREES TO BE PROPOSED AND INSTALLED SHALL COMPLY WITH THE CITY OF NOVI WOODLAND ORDINANCE.

# GENERAL NOTES

1) City of Novi Benchmarks #2742 & 3411 are from "MONTEBELLO ESTATES" O.C.C.S.P. No. 2172 by Seiber, Kast Engineering LLC. Benchmarks #202 & #203 are established by DESINE Inc.

3) All work to comply with current City of Novi requirements.

4) Sump discharge shall be 4" dia. SCH.40 PVC at 2% slope, Minimum.

5) Water lead shall be min. 1" dia. Type K copper or HDPE SDR 9.

6) Sanitary lead shall be 6" dia. SDR 23.5 at 1% slope, Minimum.

7) Drive shall be 22' wide at back of curb and 16' wide at face of walk.

8) Tree protection fence to be installed around trees to remain.

# TREE SCHEDULE

TAG NO.	DIAMETER	COMMON NAME	BOTANICAL NAME	CONDITION	REMARKS
4146	23	Red Oak	Quercus rubra	Good	Save
4147	21	Red Oak	Quercus rubra	Good	Save
4148	22	Red Oak	Quercus rubra	Good	Save
4149	27	Red Oak	Quercus rubra	Good	Save
4150	24	Red Oak	Quercus rubra	Good	Save
4157	14	Black Cherry	Prunus serotina	Good	TBR
4158	9,11	Common Mulberry	Morus alba	Good	Save

TREE SCHEDULE FROM CONSTRUCTION PLANS BY SEIBER, KEAST ENGINEERING LLC DATED 4-19-18

# LEGAL DESCRIPTION

Unit 21 of "Montebello Estates," a part of the Southeast 1/4 of Section 27, Town 1 North, Range 8 East, City of Novi, Oakland County, Michigan, according to the Master Deed thereof, designated as Livingston County Condominium Subdivision Plan No. 2172, and as described in Act 59 of the Public Acts of 1978, as amended.

Tax ID No.: 22-27-453-021

Also known as: Vacant, Montebello Court, Novi, Mi



DESIGN: SVB  
DRAFT: SES  
CHECK: SVB

REVISED

# PLOT PLAN


## UNIT 21, MONTEBELLO ESTATES

CLIENT:  
COMPO BUILDERS  
42700 W TEN MILE ROAD  
NOVI, MI 48375

SCALE: N/A  
PROJECT No.: 183468  
DWG NAME: 3468 CP

AUG. 13, 2020

# CP2

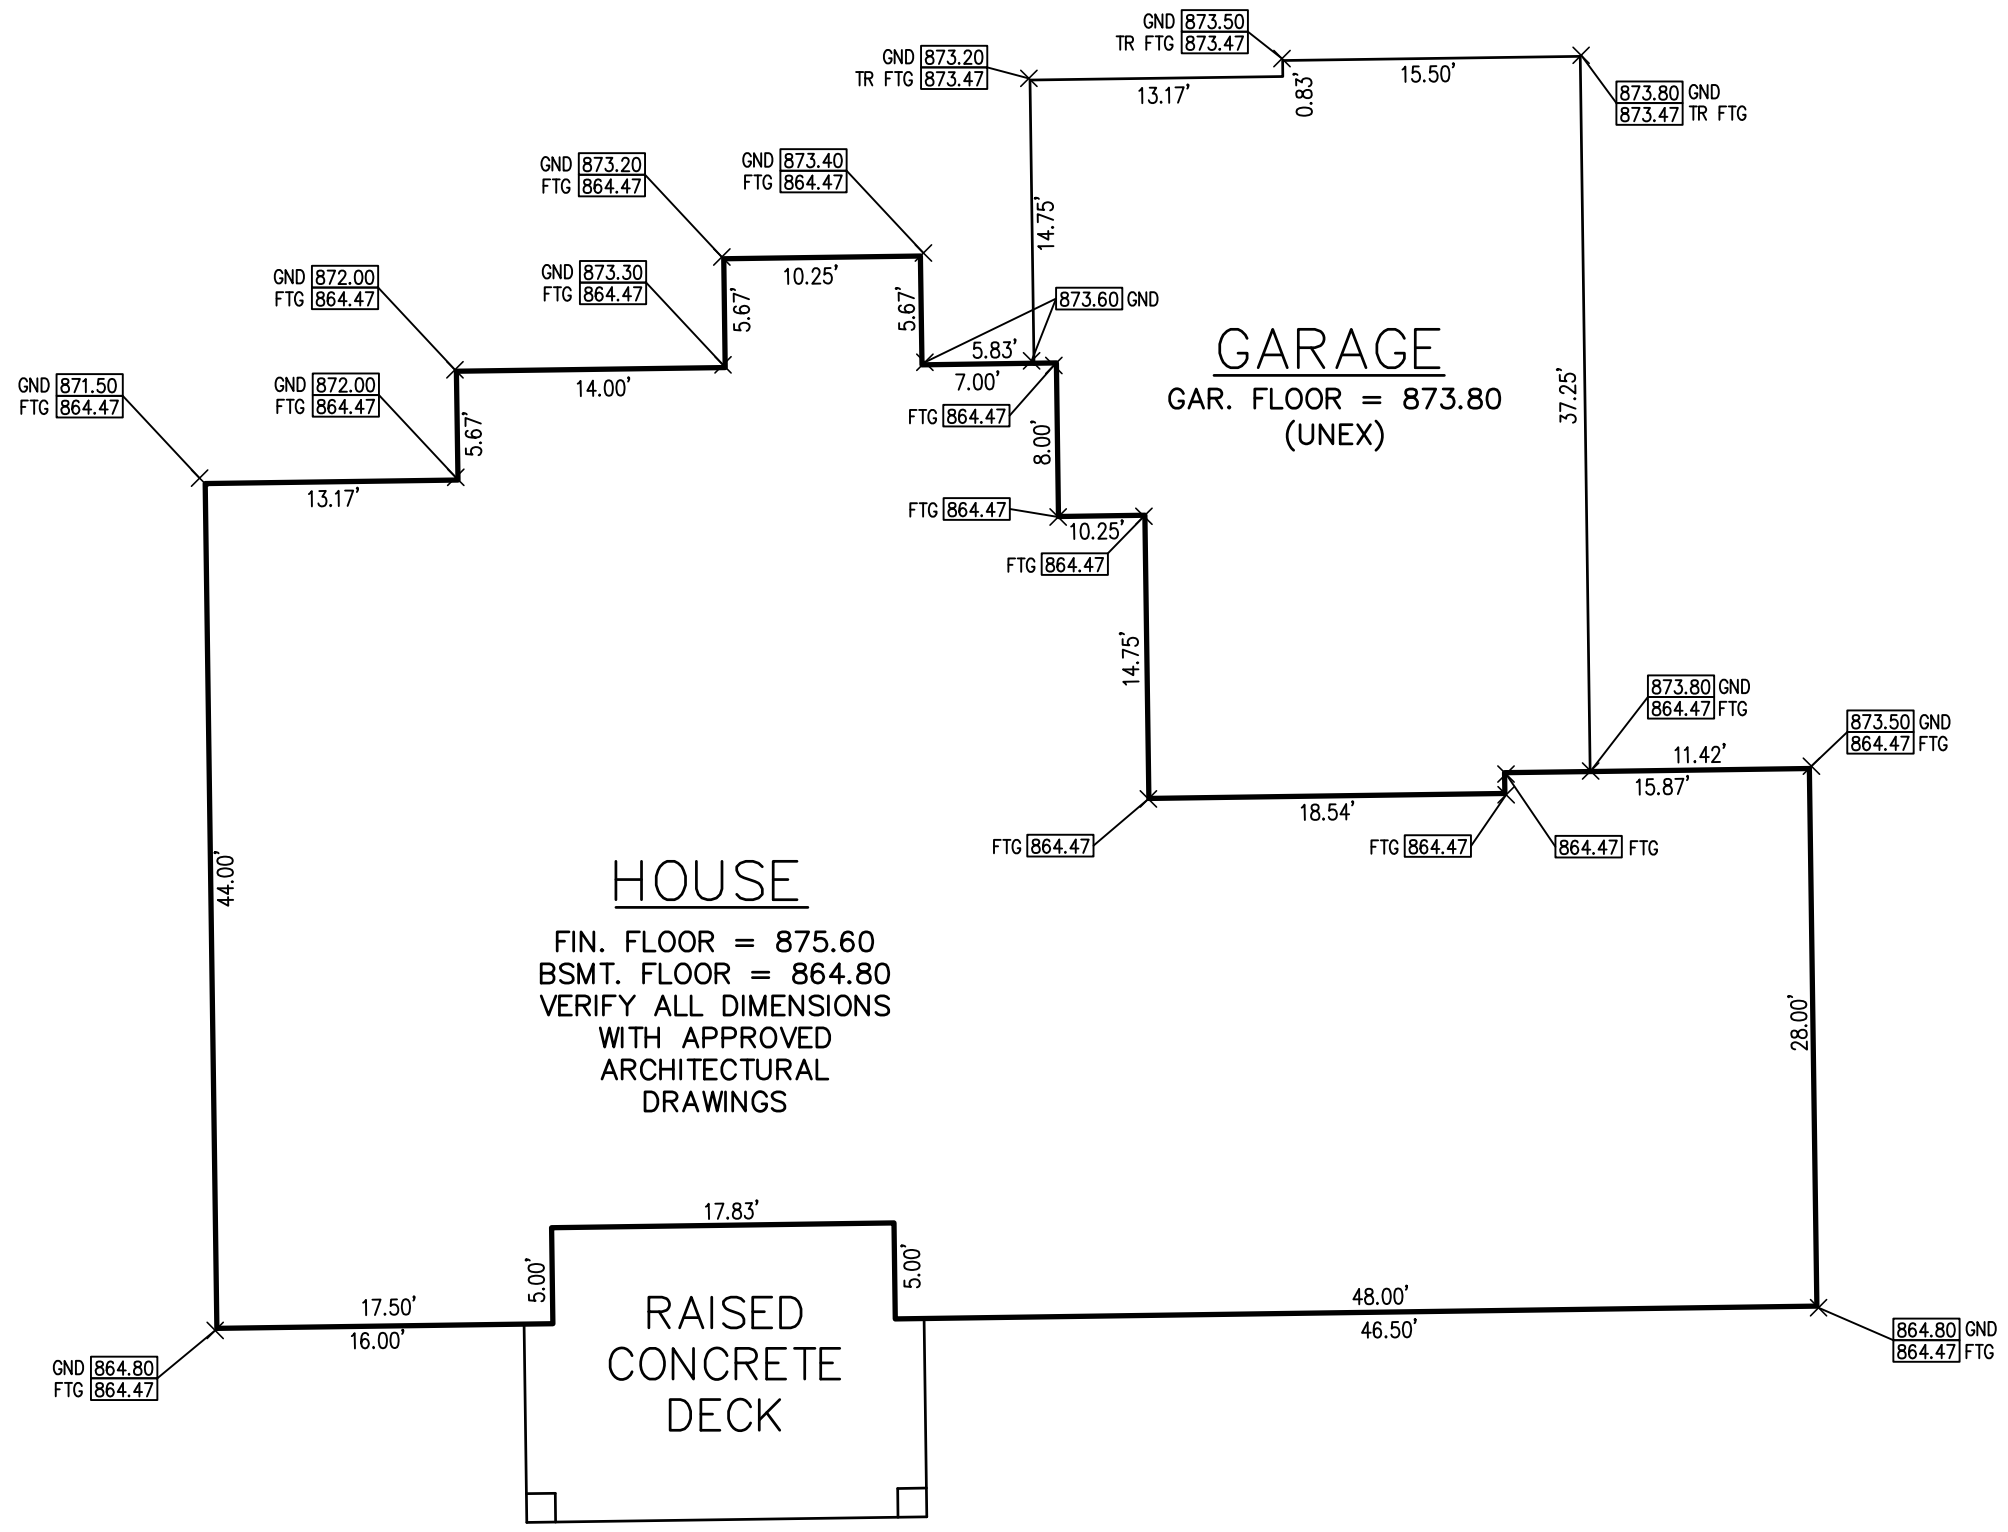

DESIGN: SVB  
 DRAFT: SES  
 CHECK: SVB

REVISED

**PLOT PLAN**  
 UNIT 21, MONTEBELLO ESTATES

CLIENT:  
 COMPO BUILDERS  
 42700 W TEN MILE ROAD  
 NOVI, MI 48375

SCALE: 1" = 10'  
 PROJECT No.: 183468  
 DWG NAME: 3468 CP  
 AUG. 13, 2020

**CP3**







## **Oppermann, Katherine**

---

**From:** Stan@StanWilliams.com  
**Sent:** Friday, October 2, 2020 5:18 PM  
**To:** Oppermann, Katherine  
**Subject:** Case PZ20-0041

Request for variance for large garage for 22652 Montebellow Ct, Parcel #50-22-27-453-021

We're the closest residence to this new house (yet to be built). Our property line is adjacent to the Montebellow estates. We have no objection to the overside garage, as long as they're not testing race engines inside or something like that.

stan williams, owner  
43635 Cottisford St.  
Northville (in Novi), MI 48167

248-344-4423